

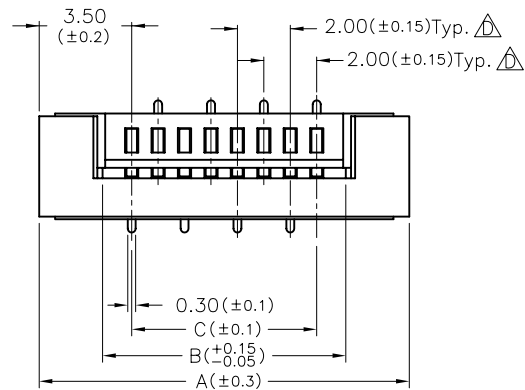
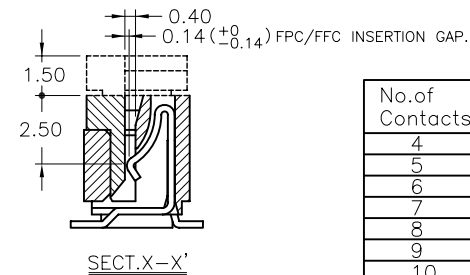





NOTE:


- 1.MATERIAL:
HOUSING:THERMOPLASTIC
SLIDER:THERMOPLASTIC
CONTACTS:COPPER ALLOY
- 2.PLATING:
CONTACTS:SEE ORDERING INFORMATION
- 3.RATING:
OPERATING VOLTAGE:50V
CURRENT RATING:0.5A
OPERATING TEMPERATURE:-55°C ~ +85°C

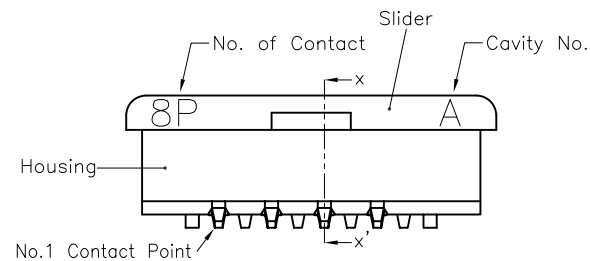

PCB Layout

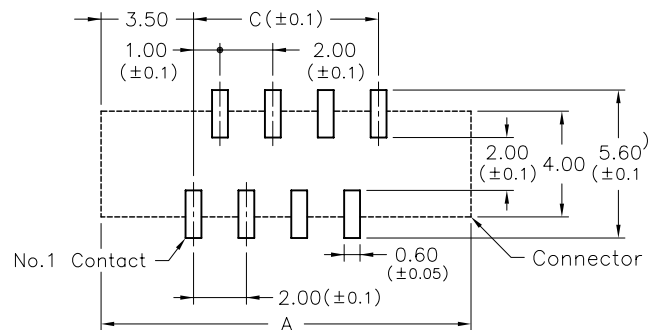

Applicable FPC

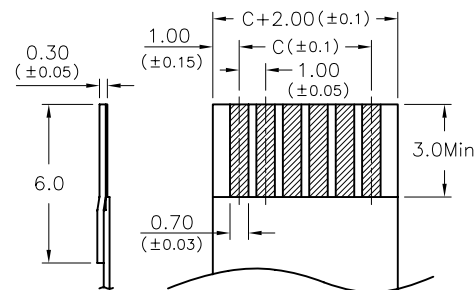

No.of Contacts	Dimensions		
	A	B	C
4	10.00	5.20	3.00
5	11.00	6.20	4.00
6	12.00	7.20	5.00
7	13.00	8.20	6.00
8	14.00	9.20	7.00
9	15.00	10.20	8.00
10	16.00	11.20	9.00
11	17.00	12.20	10.00
12	18.00	13.20	11.00
13	19.00	14.20	12.00
14	20.00	15.20	13.00
15	21.00	16.20	14.00
16	22.00	17.20	15.00
17	23.00	18.20	16.00
18	24.00	19.20	17.00
19	25.00	20.20	18.00
20	26.00	21.20	19.00
21	27.00	22.20	20.00
22	28.00	23.20	21.00
23	29.00	24.20	22.00
24	30.00	25.20	23.00
25	31.00	26.20	24.00
26	32.00	27.20	25.00
27	33.00	28.20	26.00
28	34.00	29.20	27.00
29	35.00	30.20	28.00
30	36.00	31.20	29.00
31	37.00	32.20	30.00
32	38.00	33.20	31.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPA-VZAL50CR-xx-LF


SERIES 180°SMT ZIF SINGLE CONTACT

REEL CAP HIGH 5.0mm

L TYPE FOOT POSITION

DESCRIPTION:

EMBOSSED TAPE PACKING BL106T SERIES S TYPE

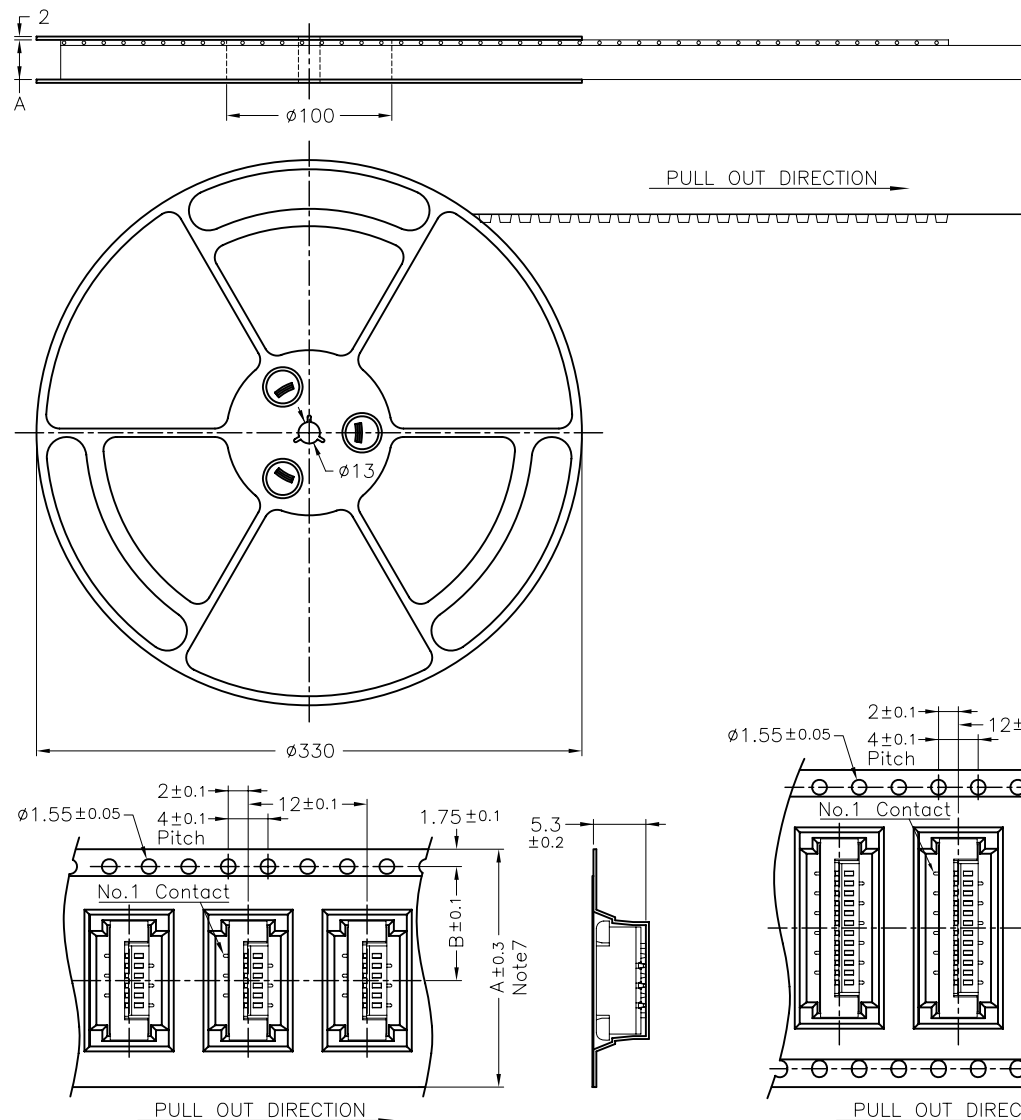

Note:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2 .
2. Carrier camber is within 1 mm in 250mm.
3. Material : Black Conductive Polystyrene Alloy
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.35 ± 0.05 mm
6. Component load per 13" reel : 1000 pcs.
7. For tape width (dimension A) 24mm a pilot hole is provided on one side.
For tape width (dimension A) 32mm and 44,56mm pilot holes are provided on both sides.

No. of Contacts	Part Number	DIM. A	DIM. B	DIM. C
4 ↓ 9	FPA-VZAL50CR-04 ↓ FPA-VZAL50CR-09	Note 7 24	11.5	—
10 ↓ 14	FPA-VZAL50CR-10 ↓ FPA-VZAL50CR-14	32	14.2	28.4
15 ↓ 26	FPA-VZAL50CR-15 ↓ FPA-VZAL50CR-26	44	20.2	40.4
27 ↓ 32	FPA-VZAL50CR-27 ↓ FPA-VZAL50CR-32	56	26.2	52.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAL50CR-xx-LF
SERIES
180°SMT
SINGLE CONTACT
ZIF
CAP
HIGH 5.0mm
L TYPE FOOT POSITION
LEAD FREE
04~32WAY
REEL

DESCRIPTION: