


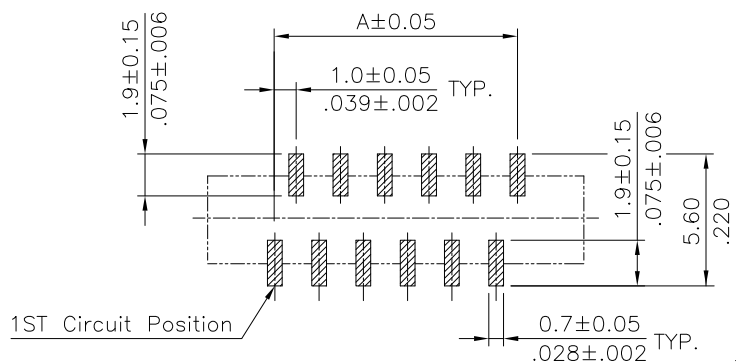
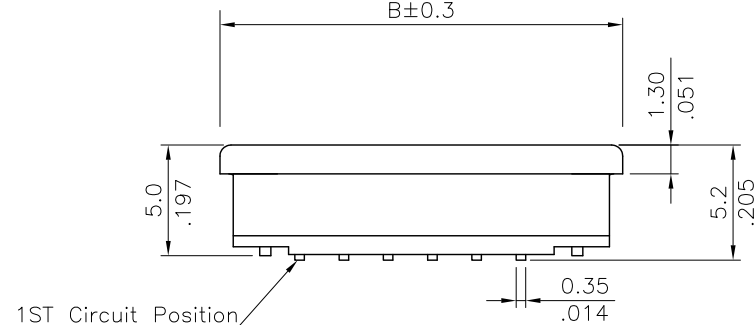
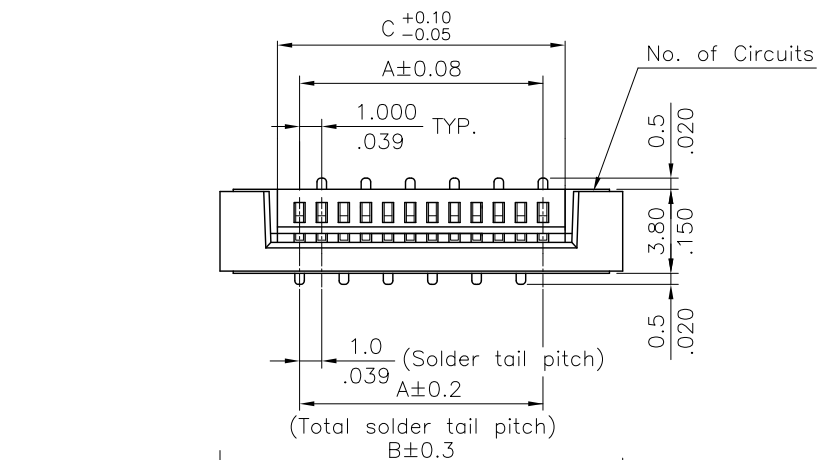
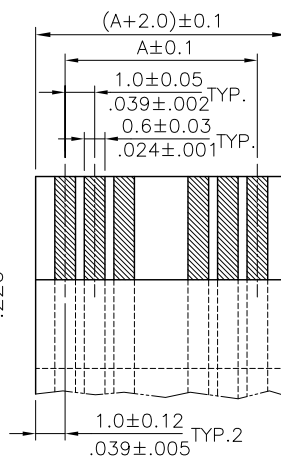


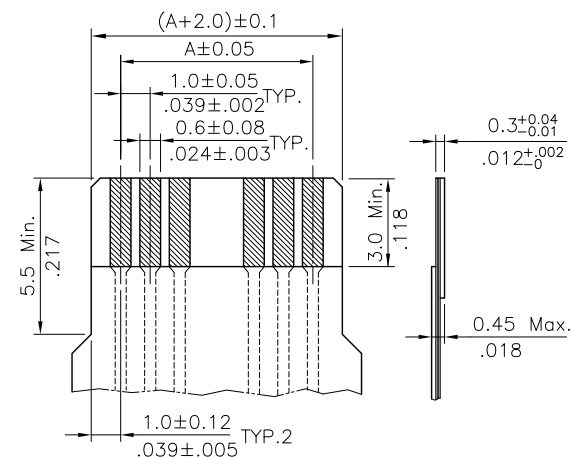

Recommended P.C. Board Layout



* ACCOMMODATED FFC



* ACCOMMODATED FPC

Material:

* Insulation: Nylon 6T UL 94V-0
Color Nature

△ * Slider: Nylon 6T UL 94V-0
Color Black

* Contact: Phosphor Bronze

A = 1.00 * No. of Spaces

B = A + 7.2

C = A + 2.1

* Available in 4 through 32 circuits

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPA-VZAL52-xx-LF

SERIES T LEAD FREE

04-32WAY

HIGH 5.2mm

L TYPE FOOT POSITION

180°SMT

SINGLE CONTACT

ZIF

DESCRIPTION: