




适用线路板  
RECOMMENDED PCB LAYOUT



Specifications  
Current Rating:1.0AMPS  
Operating Voltage:125V AC DC  
Dielectric Withstanding Voltage:  
500VAC/Minute  
Contact Resistance:30mΩ Max.  
Insulation Resistance:500MΩ Min.  
Operating Temperature:-25°C to +85°C  
Materials  
Contact Material:Phosphor Bronze  
Insulator Material:High Temperature  
Thermoplastic, UL 94V-0 LCP  
All materials must meet GREENCONN  
hazardous substances control standards.

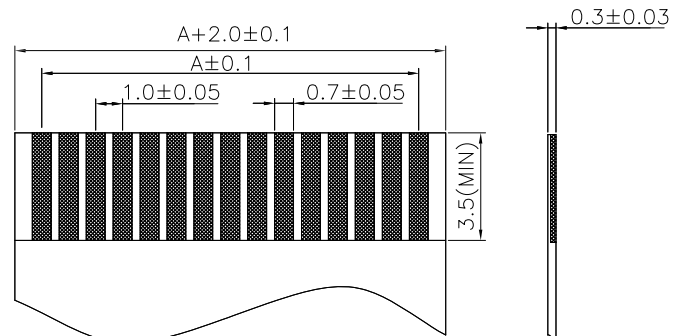

适用FPC寸法  
APPLICABLE FPC

TABLE:

| No. of<br>PIN/ROW | Dimension Information |       |       | No. of<br>PIN/ROW | Dimension Information |       |       |
|-------------------|-----------------------|-------|-------|-------------------|-----------------------|-------|-------|
|                   | A                     | B     | C     |                   | A                     | B     | C     |
| 04                | 3.00                  | 5.06  | 11.00 | 23                | 22.00                 | 24.06 | 30.00 |
| 05                | 4.00                  | 6.06  | 12.00 | 24                | 23.00                 | 25.06 | 31.00 |
| 06                | 5.00                  | 7.06  | 13.00 | 25                | 24.00                 | 26.06 | 32.00 |
| 07                | 6.00                  | 8.06  | 14.00 | 26                | 25.00                 | 27.06 | 33.00 |
| 08                | 7.00                  | 9.06  | 15.00 | 27                | 26.00                 | 28.06 | 34.00 |
| 09                | 8.00                  | 10.06 | 16.00 | 28                | 27.00                 | 29.06 | 35.00 |
| 10                | 9.00                  | 11.06 | 17.00 | 29                | 28.00                 | 30.06 | 36.00 |
| 11                | 10.00                 | 12.06 | 18.00 | 30                | 29.00                 | 31.06 | 37.00 |
| 12                | 11.00                 | 13.06 | 19.00 | 31                | 30.00                 | 32.06 | 38.00 |
| 13                | 12.00                 | 14.06 | 20.00 | 32                | 31.00                 | 33.06 | 39.00 |
| 14                | 13.00                 | 15.06 | 21.00 | 33                | 32.00                 | 34.06 | 40.00 |
| 15                | 14.00                 | 16.06 | 22.00 | 34                | 33.00                 | 35.06 | 41.00 |
| 16                | 15.00                 | 17.06 | 23.00 | 35                | 34.00                 | 36.06 | 42.00 |
| 17                | 16.00                 | 18.06 | 24.00 | 36                | 35.00                 | 37.06 | 43.00 |
| 18                | 17.00                 | 19.06 | 25.00 | 37                | 36.00                 | 38.06 | 44.00 |
| 19                | 18.00                 | 20.06 | 26.00 | 38                | 37.00                 | 39.06 | 45.00 |
| 20                | 19.00                 | 21.06 | 27.00 | 39                | 38.00                 | 40.06 | 46.00 |
| 21                | 20.00                 | 22.06 | 28.00 | 40                | 39.00                 | 41.06 | 47.00 |
| 22                | 21.00                 | 23.06 | 29.00 |                   |                       |       |       |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.10  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAL55C-xx-LF  
SERIES  
180°SMT  
ZIF  
LEAD FREE  
04~40WAY  
MYLAR  
HIGH 5.5mm  
L TYPE FOOT POSITION  
SINGLE CONTACT

DESCRIPTION: Pitch 1.00 FPC Connector