

Notes:

MATERIAL:

HOUSING : THERMALPLASTIC , HEATPROOF PLASTIC NY46-TE250F8 NC
/ UL 94V-0

COVER : THERMALPLASTIC , PA9T- GN2330 / UL 94V-0

CONTACT : PHOSPHOR BRONZE , C5191R-SH , T=0.20mm







HOLDDOWN: BRONZE H65 T=0.20mm

Ni PLATE : 1~3 um"

Tin COPPER PLATE : 2~5 um"

(銅/COPPER : 1~3%)

CKT	A	B	C	D
4	9.10	4.00	11.10	5.96
5	10.10	5.00	12.10	5.96
6	11.10	6.00	13.10	5.96
7	12.10	7.00	14.10	5.96
8	13.10	8.00	15.10	5.96
9	14.10	9.00	16.10	5.96
10	15.10	10.00	17.10	5.96
11	16.10	11.00	18.10	5.96
12	17.10	12.00	19.10	5.96
13	18.10	13.00	20.10	5.96
14	19.10	14.00	21.10	5.96
15	20.10	15.00	22.10	6.39
16	21.10	16.00	23.10	6.39
17	22.10	17.00	24.10	6.39
18	23.10	18.00	25.10	6.39
19	24.10	19.00	26.10	6.39
20	25.10	20.00	27.10	6.39
21	26.10	21.00	28.10	6.39
22	27.10	22.00	29.10	6.39
23	28.10	23.00	30.10	6.39
24	29.10	24.00	31.10	6.39
25	30.10	25.00	32.10	6.39
26	31.10	26.00	33.10	6.39
27	32.10	27.00	34.10	6.39
28	33.10	28.00	35.10	6.39
29	34.10	29.00	36.10	6.39
30	35.10	30.00	37.10	6.39

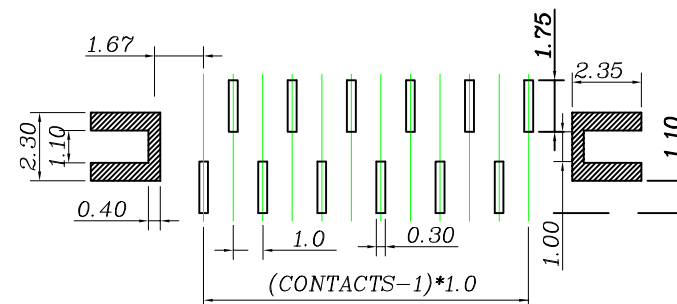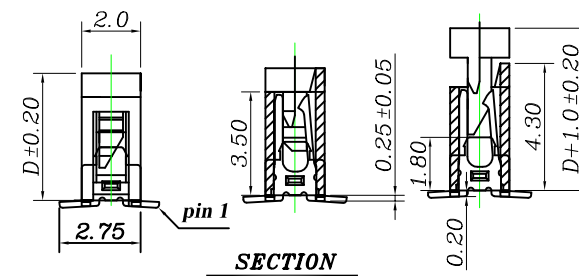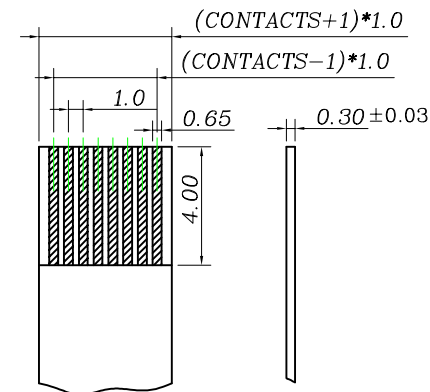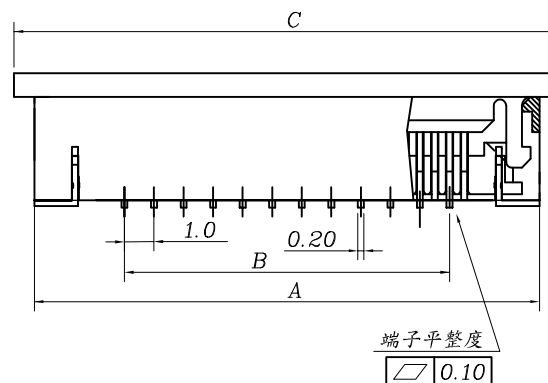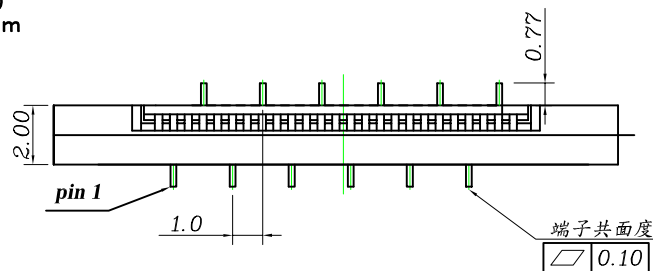

PC BOARD LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

FPA-VZALxx-xx-LF

SERIES

180°SMT

ZIF

LEAD FREE

04~30WAY

62:HIGH 6.2mm (04~14PIN)

66:HIGH 6.6mm (15~30PIN)

L TYPE FOOT POSITION

SINGLE CONTACT

DESCRIPTION: