

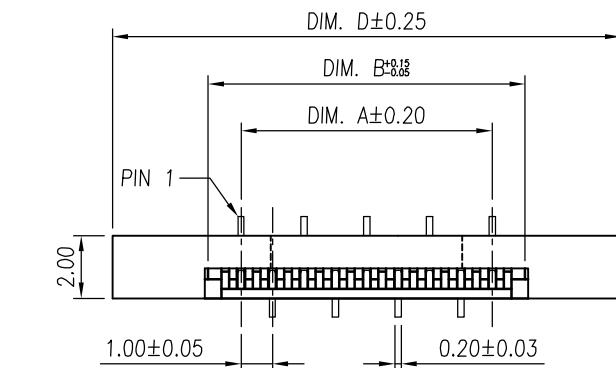




CAP PLACEMENT DIAGRAM

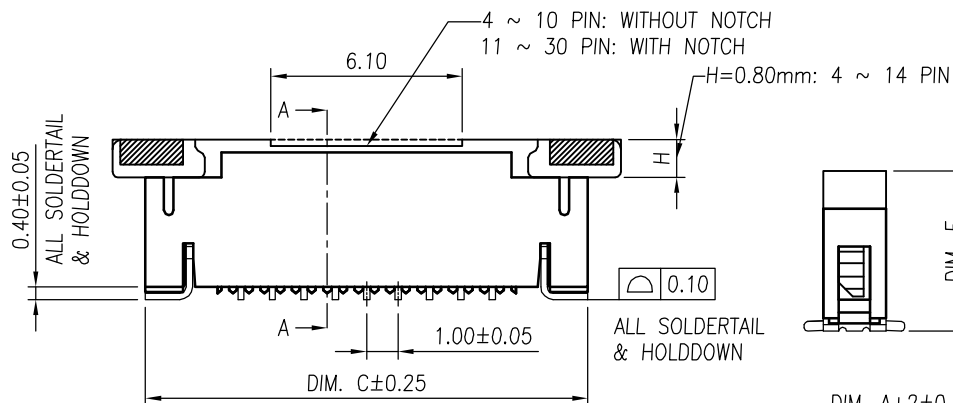

SECTION A-A

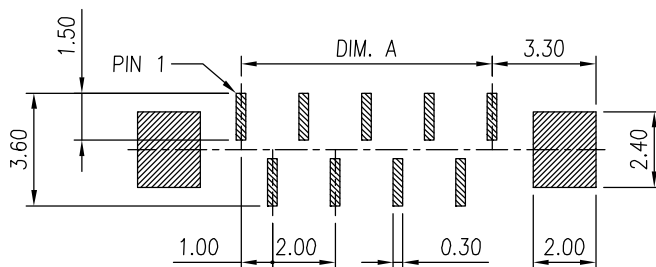

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05



FFC/FPC DIMENSION
THICKNESS 0.30 ± 0.03 mm

NOTE:

1.MATERIAL:

HOUSING: PA46, UL94V-0. COLOR: NATURAL.

ACTUATOR: PA9T, UL94V-0. COLOR: BLACK.

TERMINAL: PHOSPHOR BRONZE.

HOLDDOWN: BRASS.

CAP: LCP, UL94V-0. COLOR: BLACK.

2.FINISH:

TERMINAL: 100u" MIN. TIN PLATING OR G/F GOLD PLATING WITH 50u" MIN. NICKEL UNDERPLATED OVERALL.

HOLDDOWN: 100u" MIN. TIN PLATING WITH 50u" MIN. NICKEL UNDERPLATED OVERALL.

■ DIMENSION TABLE

Pos.	Dimension				
	A	B	C	D	E
4	3.00	5.10	9.10	11.20	4.70
5	4.00	6.10	10.10	12.20	4.70
6	5.00	7.10	11.10	13.20	4.70
7	6.00	8.10	12.10	14.20	4.70
8	7.00	9.10	13.10	15.20	4.70
9	8.00	10.10	14.10	16.20	4.70
10	9.00	11.10	15.10	17.20	4.70
11	10.00	12.10	16.10	18.20	4.70
12	11.00	13.10	17.10	19.20	4.70
13	12.00	14.10	18.10	20.20	4.70
14	13.00	15.10	19.10	21.20	4.70

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
X. ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm 1^\circ$

照片框

ORDER INFORMATION

FPA-VZAR47CR-xx-LF
SERIES | 04~14WAY | LEADFREE
180°SMT | REEL
ZIF | CAP | 4.7mm HIGH
SINGLE CONTACT R TYPE FOOT POSITION

DESCRIPTION: FPC/FFC 1.0mm PITCH ZIF SMT TYPE CONNECTOR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

NOTE :

一. 封裝膠帶(Cover tape)

1.1 材質(Material) : PS

自黏抗靜電(PSA tape anti-static)

1.2 顏色(Color) : 透明(Transparent)

1.3 規格(Dimension) :

寬(Width) : 21.3mm、25.5mm、37.5mm、49.5mm

厚(Thickness): 0.06mm

二. 承載帶(Carrier tape)

2.1 材質(Material) : PS

抗靜電型(Anti-static)

2.2 顏色(Color) : 透明(Transparent)

2.3 規格(Dimension) :

寬(Width) : 24mm、32mm、44mm、56mm

厚(Thickness): 0.40mm

三. 塑膠輪盤(Plastic reel)

3.1 材質(Material) : PS

抗靜電型(Anti-static)

3.2 顏色(Color) : 藍色(Blue)

3.3 規格(Dimension) :

外徑(Outer diameter) : $\phi 330$ mm (13")

輪心(Plastic hub) : $\phi 100$ mm (4")

輪心寬(Plastic the wheel the hub width) : 24.5mm

、32.5mm、44.5mm、56.5mm

四. 包裝箱(Carton)

4.1 材質(Material) : 瓦楞紙(Corrugated paper)

規格(Dimension) : 參照圖表 1 (See table 1)

五. 其他包裝材料(Other packaging materials)

5.1 防水袋(Waterproof bag)

5.2 乾燥劑(Desiccative)

5.3 三角板(Angle paperboard)

5.4 標籤(Label)

六. 適用規格(Applicable specifications) :

6.1 參照圖表 2 (See table 2)


七. 包裝數量(Quantity)

7.1 900 pcs / 每卷(Reel)

7.2 參照圖表 1 (See table 1) / 每箱(Carton)

POS.	DIMENSION(mm)				PACKING		CARTON DIMENSION (mm)
	F	W1	W2	W3	REEL/CARTON	QUANTITY(PCS)	CARTON
04 ~ 09	11.5	24.5	30.5	24.0	10	9000	380(L) X 380(W) X 350(H)
10 ~ 13	28.4	32.5	38.5	32.0	8	7200	
14 ~ 25	40.4	44.5	50.5	44.0	6	5400	
26 ~ 30	52.4	56.5	62.5	56.0	4	3600	

Table 1

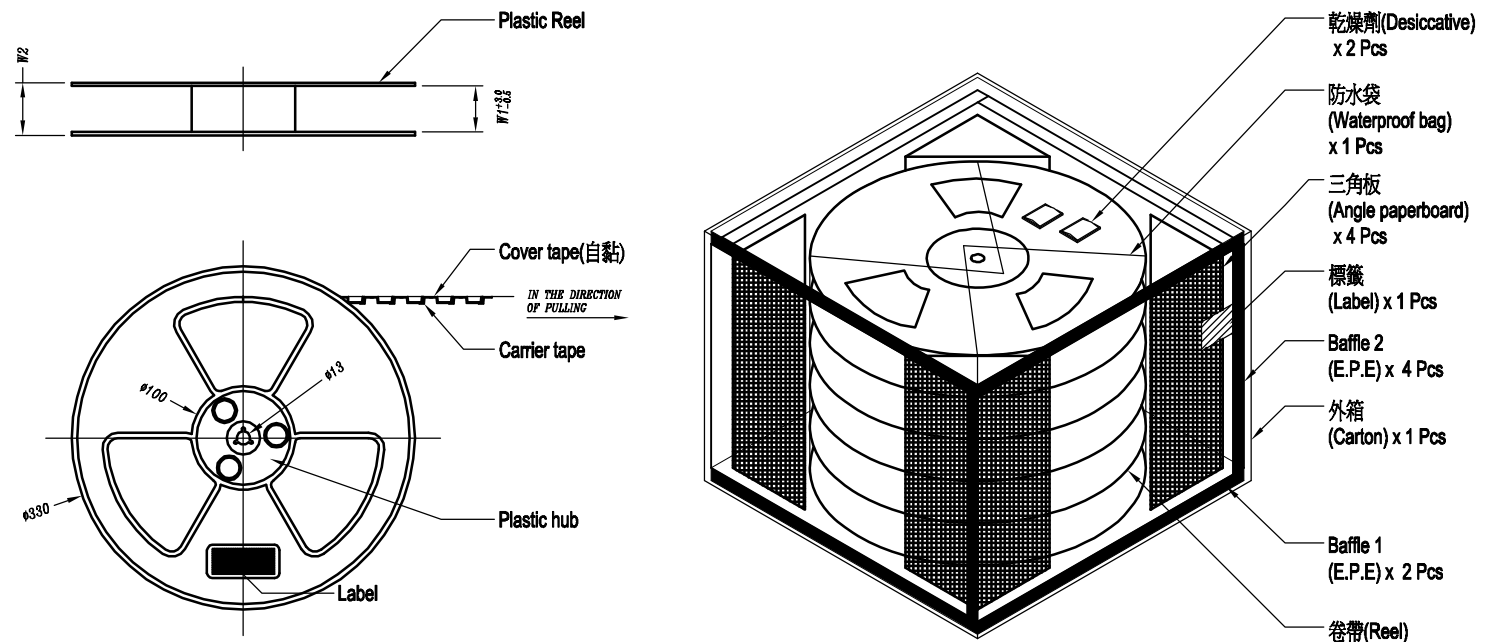

包裝示意圖(PACKAGING SCHEMATIC)

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm 1^\circ$

照片框

ORDER INFORMATION

FPA-VZAR47CR-xx-LF

SERIES

180°SMT

ZIF

SINGLE CONTACT

R TYPE

FOOT POSITION

04~14WAY

REEL

CAP

4.7mm HIGH

LEADFREE




DESCRIPTION: FPC/FFC 1.0mm PITCH ZIF SMT TYPE CONNECTOR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

PEEL TEST CONDITIONS

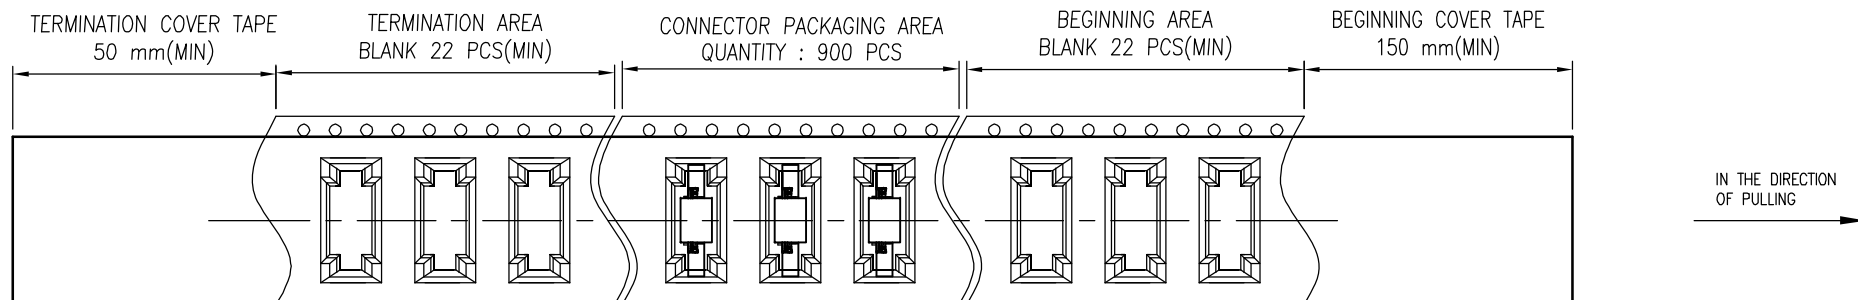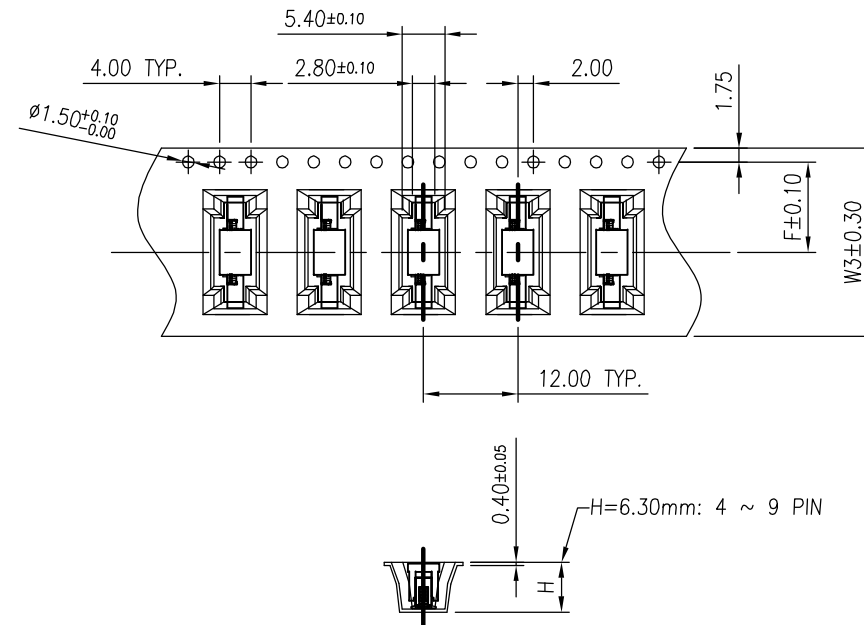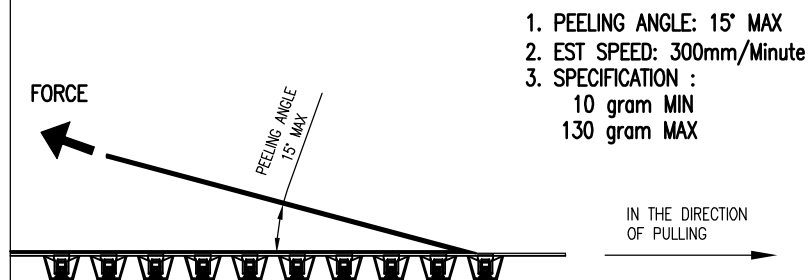

WIDTH : 24 mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAR47CR-xx-LF




SERIES 04~14WAY LEADFREE

180°SMT REEL

ZIF CAP 4.7mm HIGH

SINGLE CONTACT R TYPE FOOT POSITION

DESCRIPTION: FPC/FFC 1.0mm PITCH ZIF SMT TYPE CONNECTOR

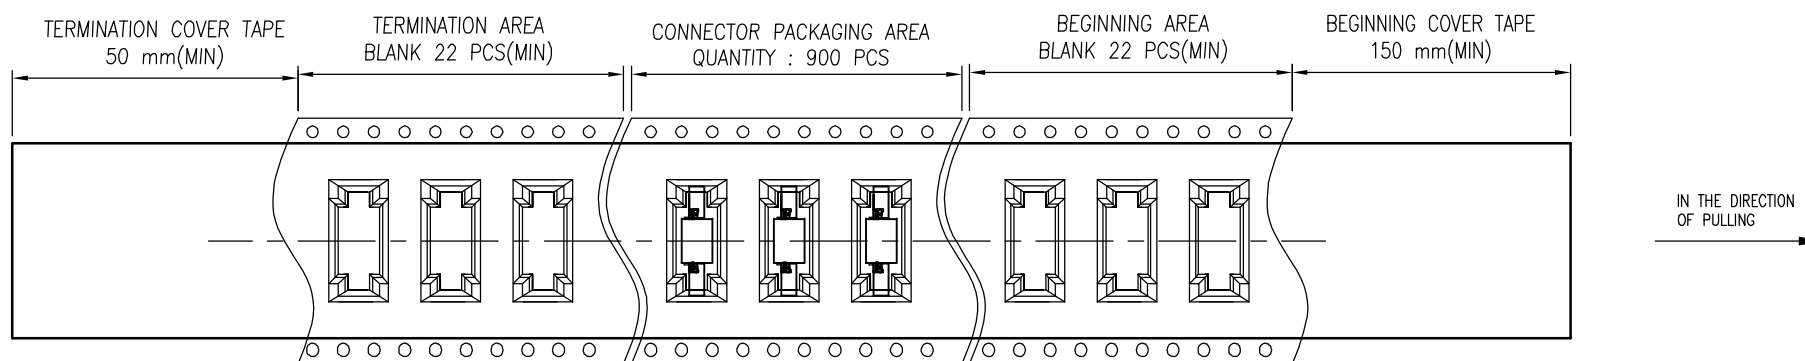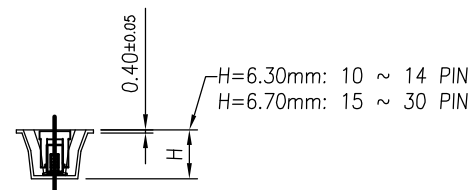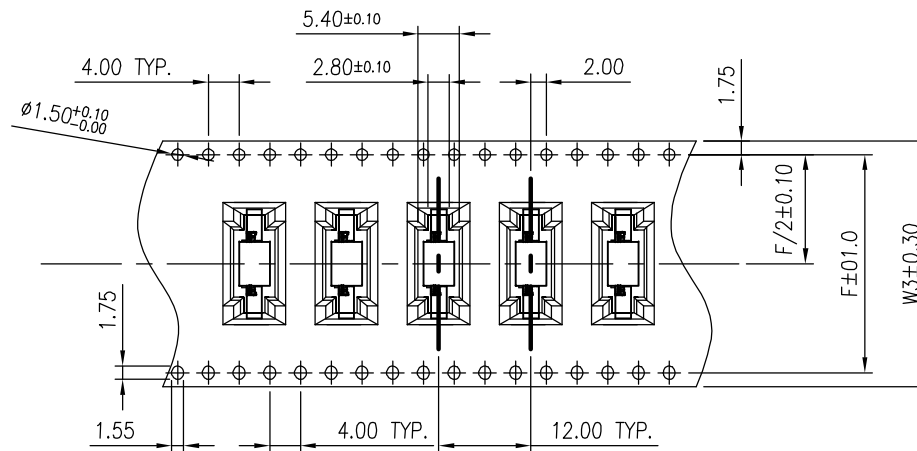

WIDTH : 32 , 44 , 56 mm Carrier

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAR47CR-xx-LF
SERIES | | | | 04~14WAY | LEADFREE
| | | | REEL
180°SMT | | CAP
ZIF | 4.7mm HIGH
SINGLE CONTACT R TYPE FOOT POSITION

DESCRIPTION: FPC/FFC 1.0mm PITCH ZIF SMT TYPE CONNECTOR