




FPA-VZAR-xx




(RECOMMENDED PCB LAYOUT)

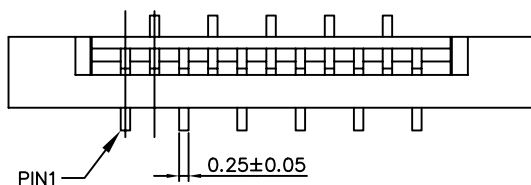





FPA-VZAL-xx



FPA-VZAR-xx

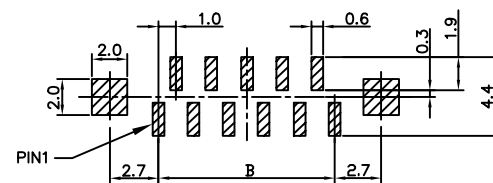

FPA-VZAL-xx

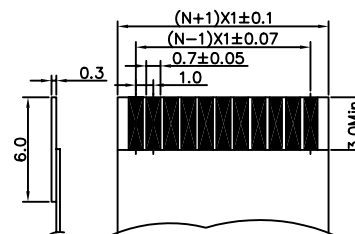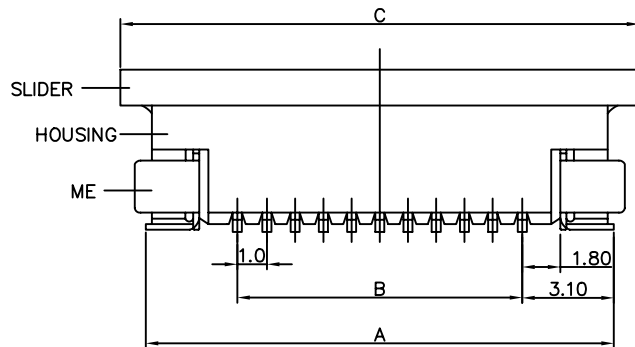

N=NUMBER OF CONTACTS
(APPLICABLE FPC/FFC)

SPECIFICATIONS
 Operating Voltage :100 VAC Max.
 Current Rating : 0.5 Amp Max.
 Dielectric Withstanding Voltage: 500 VAC RMS.
 Insulator Resistance : 500 MΩ Min
 Contact Resistance : 30 mΩ Max.
 Operature Temperature: -40℃ To +85℃
 Accommodable FFC/FPC Thickness:0.25mm~0.35mm

MATERIAL
 Insulator: PA9T; UL94V-0 Rated
 (COLOR:IVORY)
 Slider: PPS; UL94V-0 Rated.
 ME: Brass
 Plating:See Ordering Information

Pos.	A±0.40	B±0.15	C±0.20	D±0.08
4	9.20	3.00	11.00	5.15
5	10.20	4.00	12.00	6.15
6	11.20	5.00	13.00	7.15
7	12.20	6.00	14.00	8.15
8	13.20	7.00	15.00	9.15
9	14.20	8.00	16.00	10.15
10	15.20	9.00	17.00	11.15
11	16.20	10.00	18.00	12.15
12	17.20	11.00	19.00	13.15
13	18.20	12.00	20.00	14.15
14	19.20	13.00	21.00	15.15
15	20.20	14.00	22.00	16.15
16	21.20	15.00	23.00	17.15
17	22.20	16.00	24.00	18.15
18	23.20	17.00	25.00	19.15
19	24.20	18.00	26.00	20.15
20	25.20	19.00	27.00	21.15
21	26.20	20.00	28.00	22.15
22	27.20	21.00	29.00	23.15
23	28.20	22.00	30.00	24.15
24	29.20	23.00	31.00	25.15
25	30.20	24.00	32.00	26.15
26	31.20	25.00	33.00	27.15
27	32.20	26.00	34.00	28.15
28	33.20	27.00	35.00	29.15
29	34.20	28.00	36.00	30.15
30	35.20	29.00	37.00	31.15
31	36.20	30.00	38.00	32.15
32	37.20	31.00	39.00	33.15
33	38.20	32.00	40.00	34.15
34	39.20	33.00	41.00	35.15

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫股份有限公司

PART NO. FPA-VZAx-xx

DWG NO. FPA-VZAx-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIP TION:

1.0 ZIF FPC CONN. TOP ENTRY SNMT TYPE.

AREA

REVISIONS

HK

DATE