

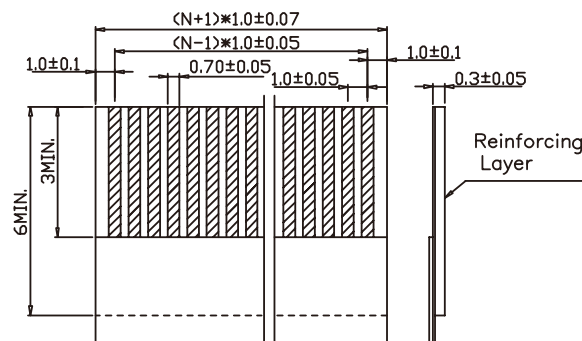

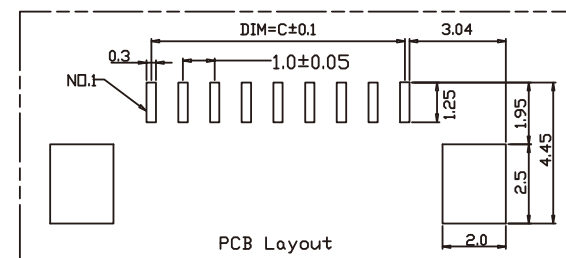


Electrical Characteristics:  
 Current rating:0.4A AC/DC  
 Voltage rating:50V AC/DC  
 Temperature range:-25℃~+85℃  
 Withstand Voltage:200V AC/Minute  
 Contact Resistance:≤20mΩ  
 Insulation Resistance:500mΩ  
 Relative Humidity:93%+40℃

Material Description:  
 Contact:Phosphor Bronze Tin-plated  
 Solder Tab:Phosphor Bronze Tin-plated  
 Housing:Thermoplastic (UL94V-0)  
 Slider:Thermoplastic (UL94V-0)

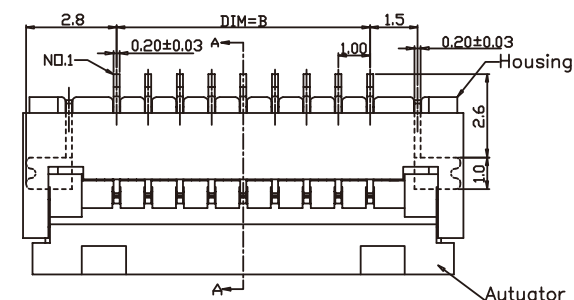


RECOMMENDED FFC/FPC DIM.

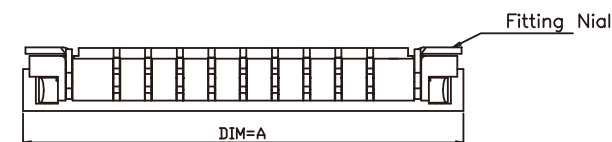

★ Have Produce Pin Number

| pin  | DIMA | DIMB | DIMC |
|------|------|------|------|
| ★ 04 | 8.9  | 3.0  | 5.1  |
| ★ 05 | 9.9  | 4.0  | 6.1  |
| ★ 06 | 10.9 | 5.0  | 7.1  |
| ★ 07 | 11.9 | 6.0  | 8.1  |
| ★ 08 | 12.9 | 7.0  | 9.1  |
| ★ 09 | 13.9 | 8.0  | 10.1 |
| ★ 10 | 14.9 | 9.0  | 11.1 |
| ★ 11 | 15.9 | 10.0 | 12.1 |
| ★ 12 | 16.9 | 11.0 | 13.1 |
| ★ 13 | 17.9 | 12.0 | 14.1 |
| ★ 14 | 18.9 | 13.0 | 15.1 |
| ★ 15 | 19.9 | 14.0 | 16.1 |
| ★ 16 | 20.9 | 15.0 | 17.1 |
| ★ 17 | 21.9 | 16.0 | 18.1 |

| pin  | DIMA | DIMB | DIMC |
|------|------|------|------|
| ★ 18 | 22.9 | 17.0 | 19.1 |
| ★ 19 | 23.9 | 18.0 | 20.1 |
| ★ 20 | 24.9 | 19.0 | 21.1 |
| ★ 21 | 25.9 | 20.0 | 22.1 |
| ★ 22 | 26.9 | 21.0 | 23.1 |
| ★ 23 | 27.9 | 22.0 | 24.1 |
| ★ 24 | 28.9 | 23.0 | 25.1 |
| ★ 25 | 29.9 | 24.0 | 26.1 |
| ★ 26 | 30.9 | 25.0 | 27.1 |
| ★ 27 | 31.9 | 26.0 | 28.1 |
| ★ 28 | 32.9 | 27.0 | 29.1 |
| ★ 29 | 33.9 | 28.0 | 30.1 |
| ★ 30 | 34.9 | 29.0 | 31.1 |

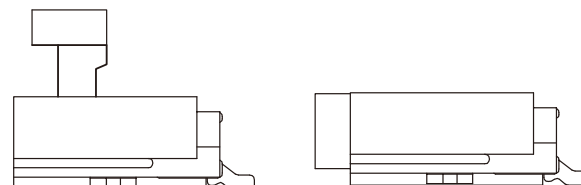

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
 .X ± 0.15  
 .XX ± 0.10  
 .XXX ±  
 ANG ±

照片框

ORDER INFORMATION

FPA-WHB201-xx-LF

SERIES  
 90°SMT  
 LEADFREE  
 04~30WAY  
 HIGH 2.0mm  
 BOTTOM CONTACT  
 HINGED ZIF

DESCRIPTION: FPC/FFC Connector 1.0mm Press Type H=2.0mm