

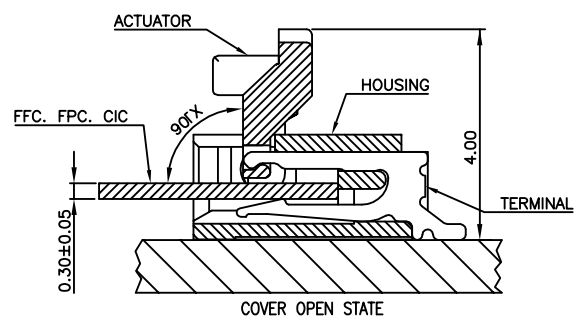
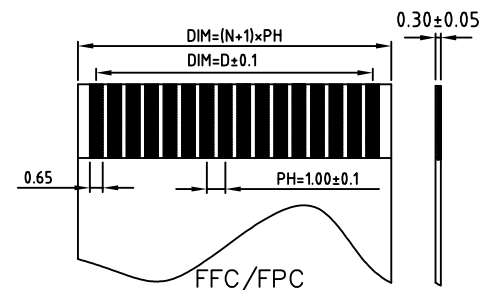
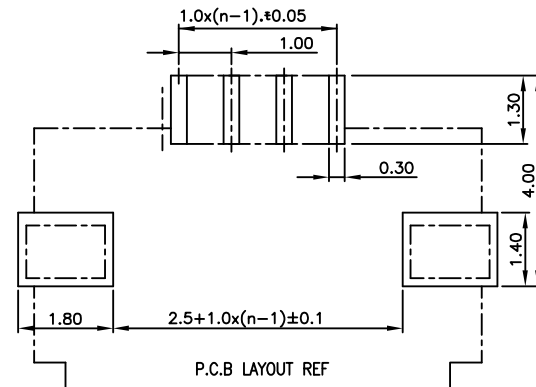
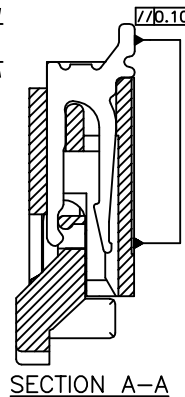


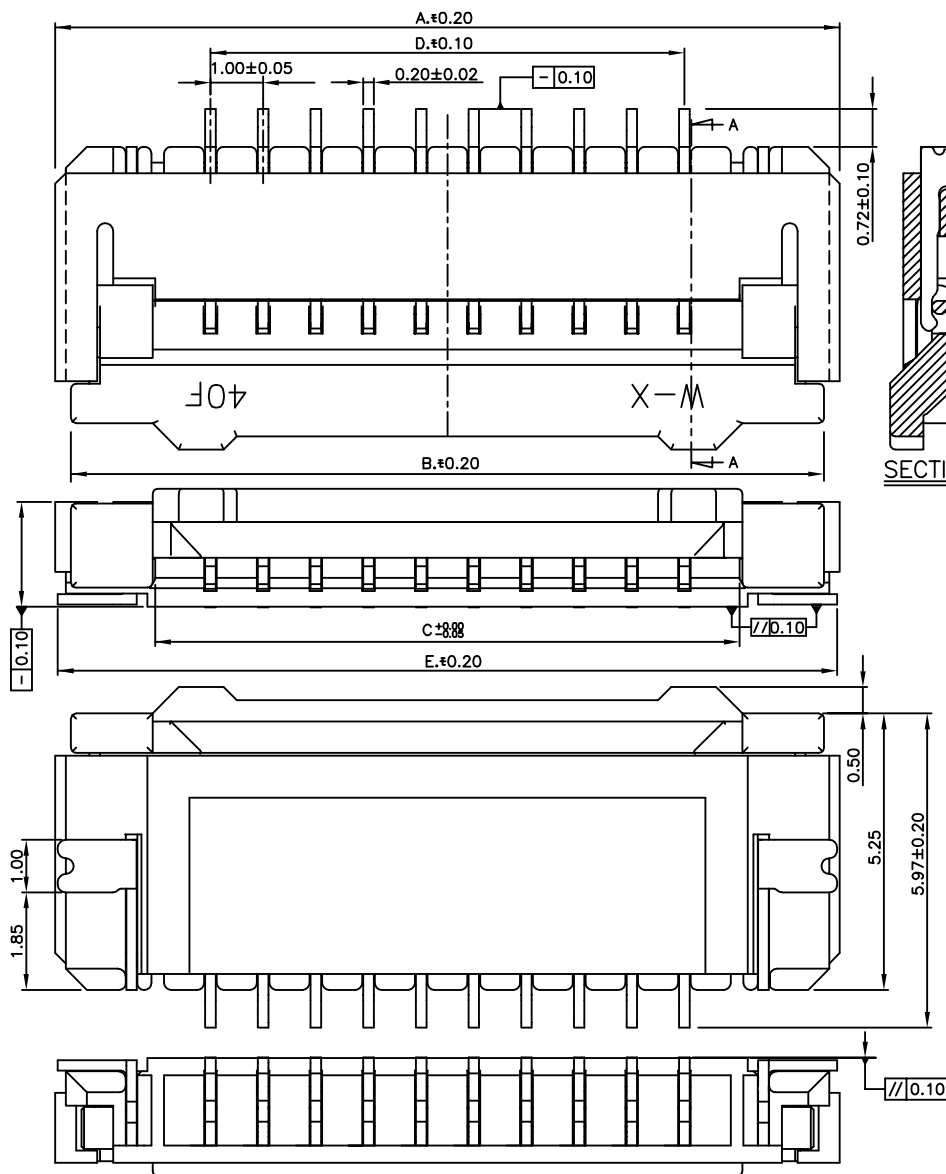

P数	A	B	C	D	E
★ 4	8.90	8.30	5.07	3.00	8.80
★ 5	9.90	9.30	6.07	4.00	9.80
★ 6	10.90	10.30	7.07	5.00	10.80
★ 7	11.90	11.30	8.07	6.00	11.80
★ 8	12.90	12.30	9.07	7.00	12.80
★ 9	13.90	13.30	10.07	8.00	13.80
★ 10	14.90	14.30	11.07	9.00	14.80
★ 11	15.90	15.30	12.07	10.00	15.80
★ 12	16.90	16.30	13.07	11.00	16.80
★ 13	17.90	17.30	14.07	12.00	17.80
★ 14	18.90	18.30	15.07	13.00	18.80
★ 15	19.90	19.30	16.07	14.00	19.80
★ 16	20.90	20.30	17.07	15.00	20.80
★ 17	21.90	21.30	18.07	16.00	21.80
★ 18	22.90	22.30	19.07	17.00	22.80
★ 19	23.90	23.30	20.07	18.00	23.80
★ 20	24.90	24.30	21.07	19.00	24.80
★ 21	25.90	25.30	22.07	20.00	25.80
★ 22	26.90	26.30	23.07	21.00	26.80
★ 23	27.90	27.30	24.07	22.00	27.80
★ 24	28.90	28.30	25.07	23.00	28.80
★ 25	29.90	29.30	26.07	24.00	29.80
★ 26	30.90	30.30	27.07	25.00	30.80
★ 27	31.90	31.30	28.07	26.00	31.80
★ 28	32.90	32.30	29.07	27.00	32.80
★ 29	33.90	33.30	30.07	28.00	33.80
★ 30	34.90	34.30	31.07	29.00	34.80

★ 記號者為已開模PIN數

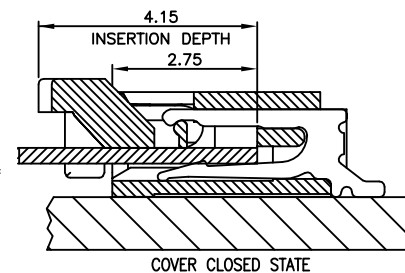

- NOTES:
1. HOUSING MATERIAL: HEAT RESISTANCE PLASTIC (UL94 V-0)
 2. TERMINAL MATERIAL: PHOSPHOR BRONZE C5210R-SH. TIN PLATING (LEAD FREE)
 3. FITTING NAIL MATERIAL: PHOSPHOR BRONZE C5191R-H. TIN PLATING (LEAD FREE)
 4. TERMINAL RETENTION FORCE: 400gf (MIN)
 5. FPC CABLE RETENTION FORCE: NO. OF CONTACT * 60gf (MIN)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, $\pm$
.X ± 0.15
.XX ± 0.10
.XXX ± 0.10
ANG $\pm 0.3^\circ$

照片框

ORDER INFORMATION

FPA-WHB22-xx-LF

SERIES

90°SMT

LEADFREE
04~30WAY
HIGH 2.24mm
BOTTOM CONTACT
HINGED ZIF

DESCRIPTION: