

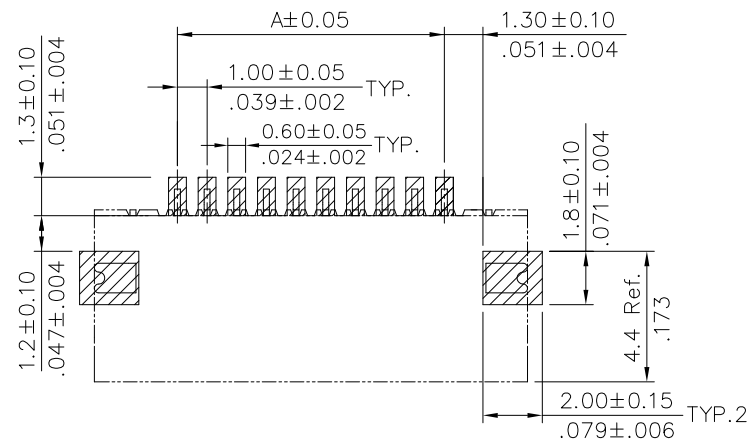
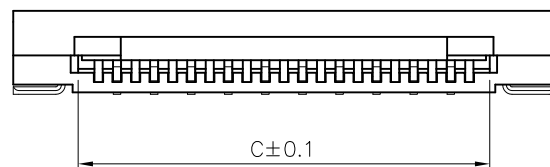
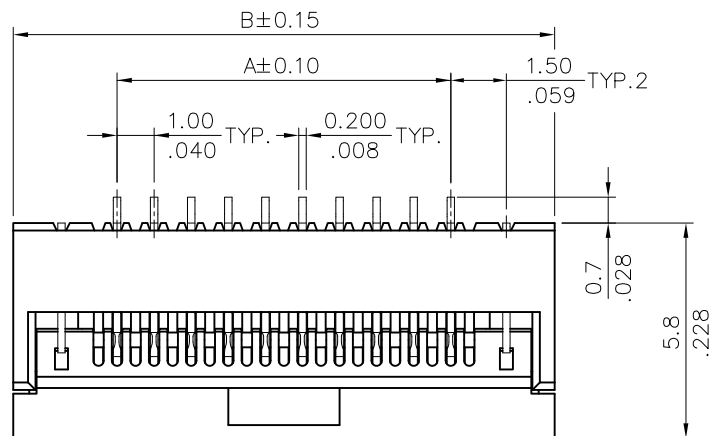
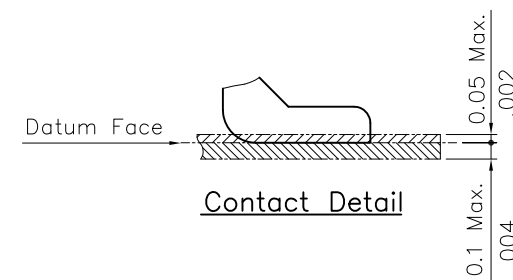
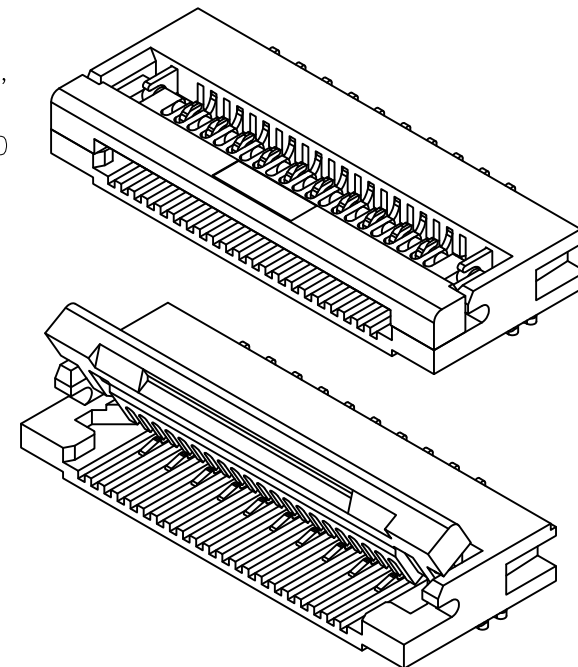


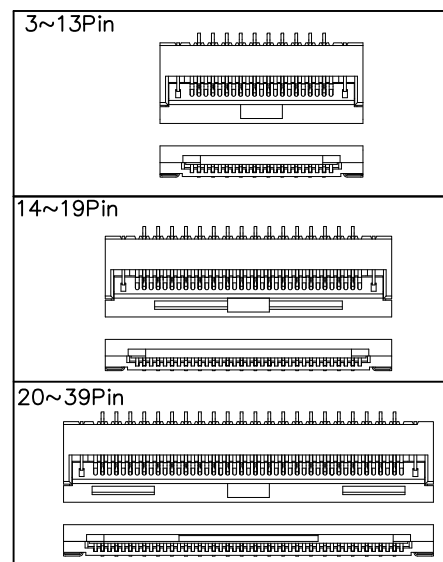

Recommended P.C. Board Layout

NOTE :

- * Body :High temperature plastic UL 94V-0, Color Nature
- * Slider :High temperature plastic UL 94V-0 Color Black
- * Contact : Phosphor Bronze
- * Fixed tab : Brass with Matte Tin Plated

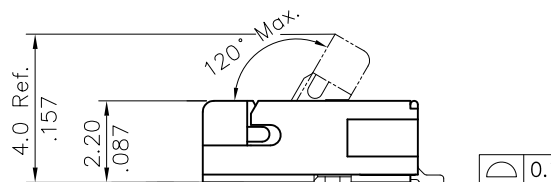

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

FPA-WHB221FKR-xx-LF
SERIES | | | | LEADFREE
90°SMT | | | | 04~32WAY
HINGED ZIF | | | | REEL
HIGH 2.2mm | | | | FPC LOCK
BOTTOM CONTACT

DESCRIPTION: 1.0mm(.040") ZIF FFC/FPC ONE-TOUCH CONNECTOR

A = 1.00 x No. of Spaces

B = A + 5.6

C = A + 2.1


D = A + 2.0

E = A + 3.6

F = A + 3.1

△△ *(Available : 04,06,08,09,10,12,13,16,26,30,32)

* Circuits not found above
please consult manufacturer *

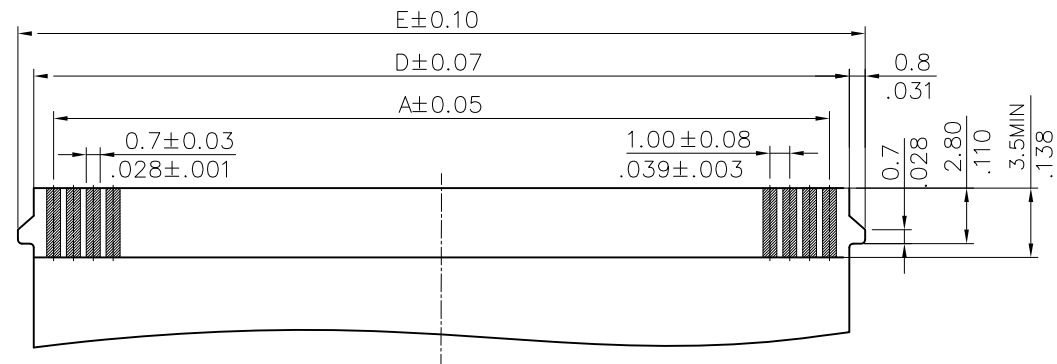

Accommodated FFC/FPC(TYPE1)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

FPA-WHB221FKR-xx-LF
SERIES
90°SMT
HINGED ZIF
REEL
FPC LOCK
HIGH 2.2mm
BOTTOM CONTACT
LEADFREE
04~32WAY




DESCRIPTION: 1.0mm(.040") ZIF FFC/FPC ONE-TOUCH CONNECTOR

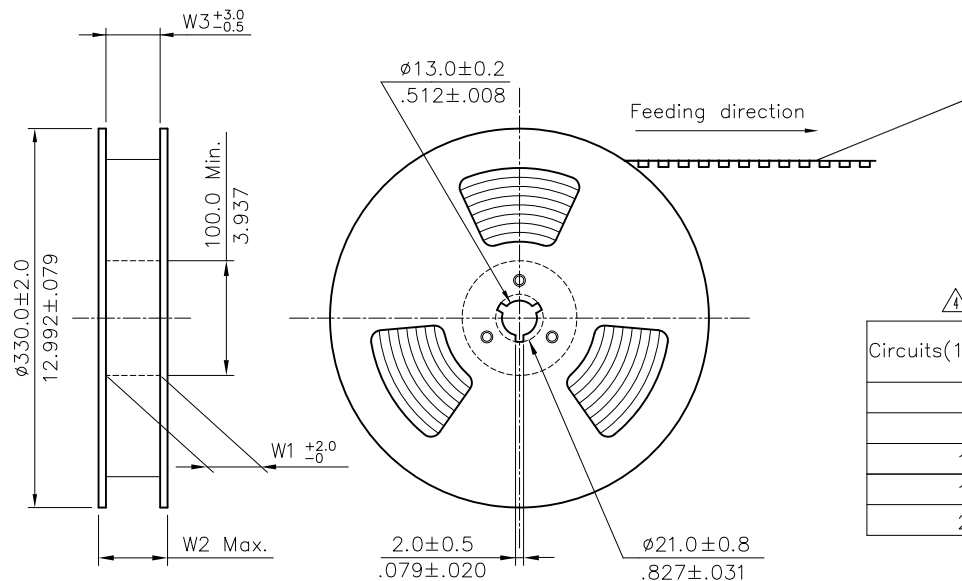

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Corrugated Paper
4. All dimensions meet EIA-481-2 requirements.
5. Thickness : 0.35 ± 0.05 mm.
6. Packing length per 13" Reel : 24.32 Meters.
7. Component load per 13" Reel : 2000 pcs.

Circuits(1.0mm Pitch)	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
4	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
5-12	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
13-16	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
17-28	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
29-39	56.0(2.205)	52.50(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	4

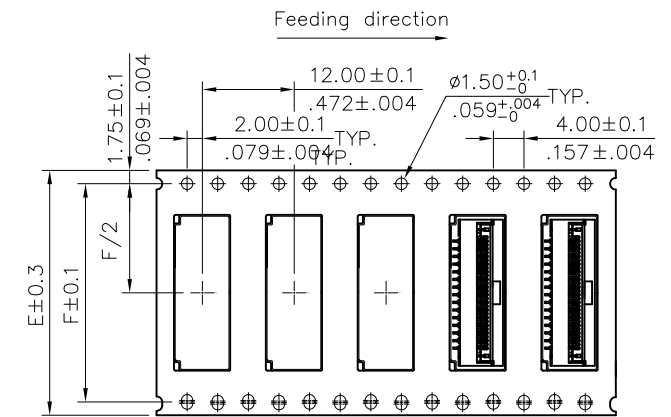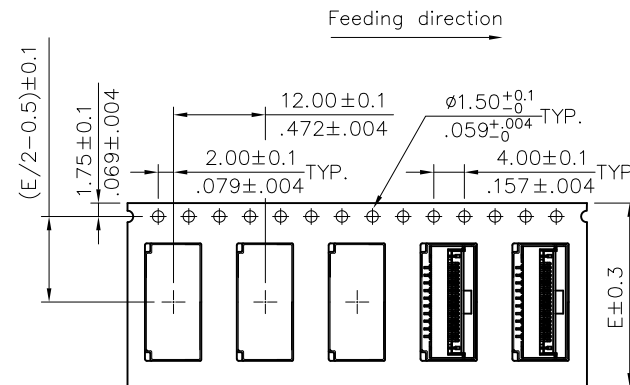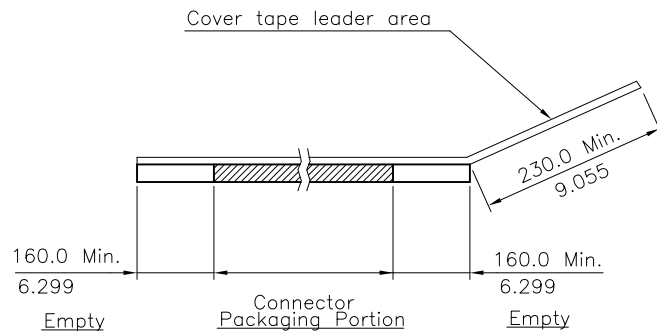

WIDTH : 16.24 mm Carrier

WIDTH : 32,44,56 mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-WHB221FKR-xx-LF
SERIES
90°SMT
HINGED ZIF
LEADFREE
04-32WAY
REEL
FPC LOCK
HIGH 2.2mm
BOTTOM CONTACT

DESCRIPTION: 1.0mm(.040") ZIF FFC/FPC ONE-TOUCH CONNECTOR