

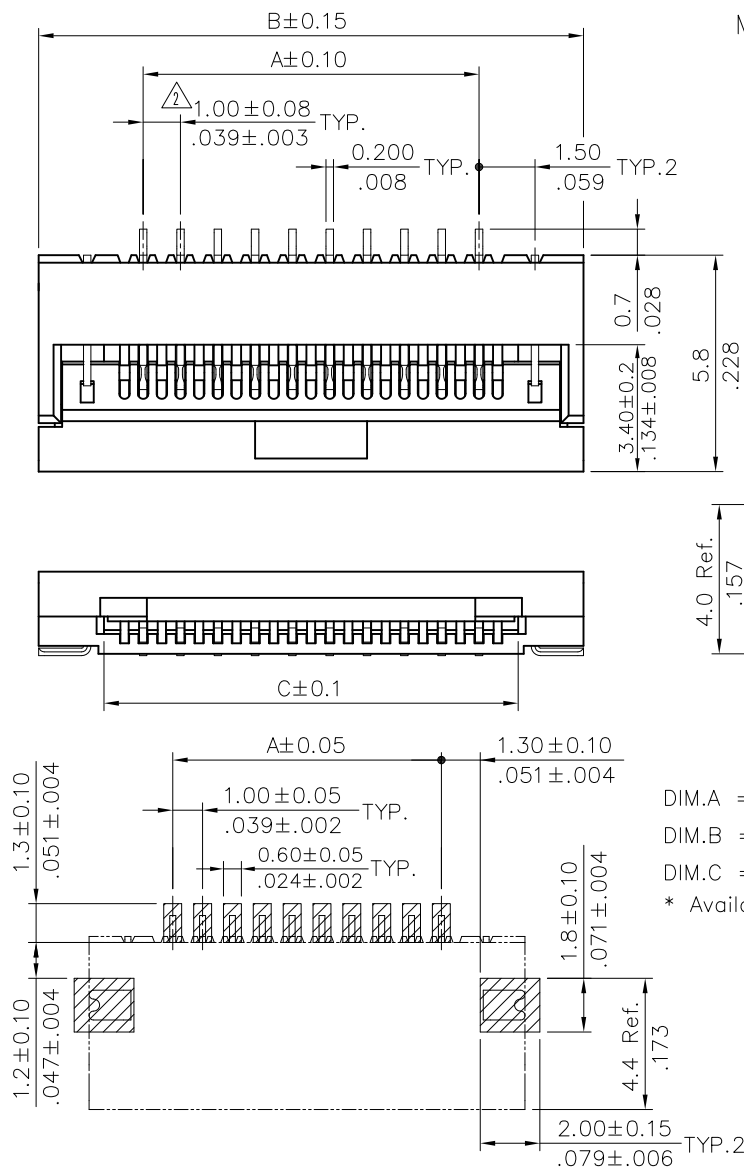


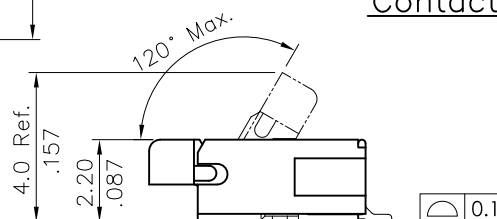


Material :


- * Body : Nylon 6T With 30% GF. UL 94V-0, Color Nature
- * Slider : Nylon 6T With 30% GF. UL 94V-0, Color Black
- * Contact : Phosphor Bronze
- * Fixed tab : Brass with Tin Plated

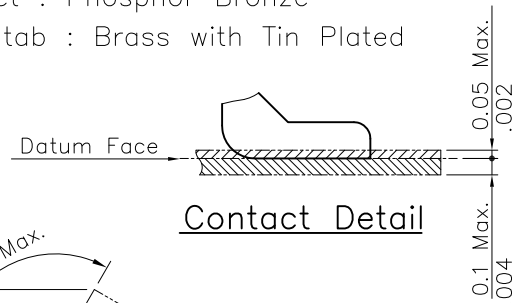

DIM.A = 1.00 x No. of Spaces
 DIM.B = DIM.A + 5.6
 DIM.C = DIM.A + 2.1
 * Available in 4 through 39 circuits

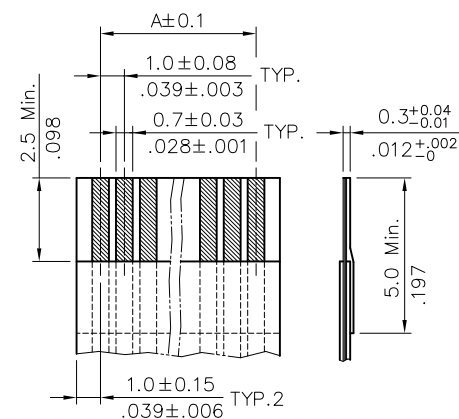

Accommodated FFC/FPC

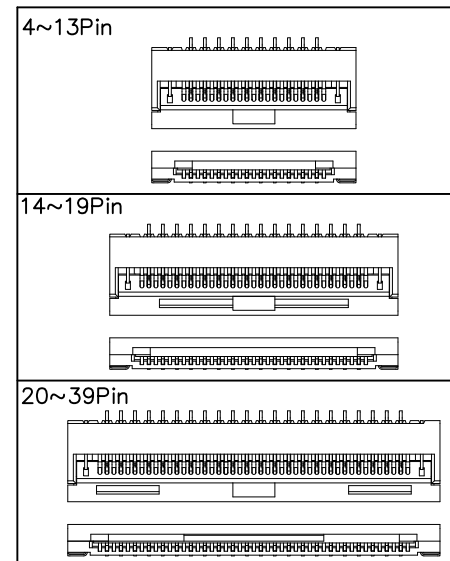

Recommended P.C. Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
 .X ± 0.15
 .XX ± 0.10
 .XXX ± 0.05
 ANG ±

照片框

ORDER INFORMATION




FPA-WHB221R-xx-LF
 SERIES REEL HIGH 2.2mm BOTTOM CONTACT HINGED ZIF
 90°SMT
 LEADFREE
 04~39WAY

DESCRIPTION: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR

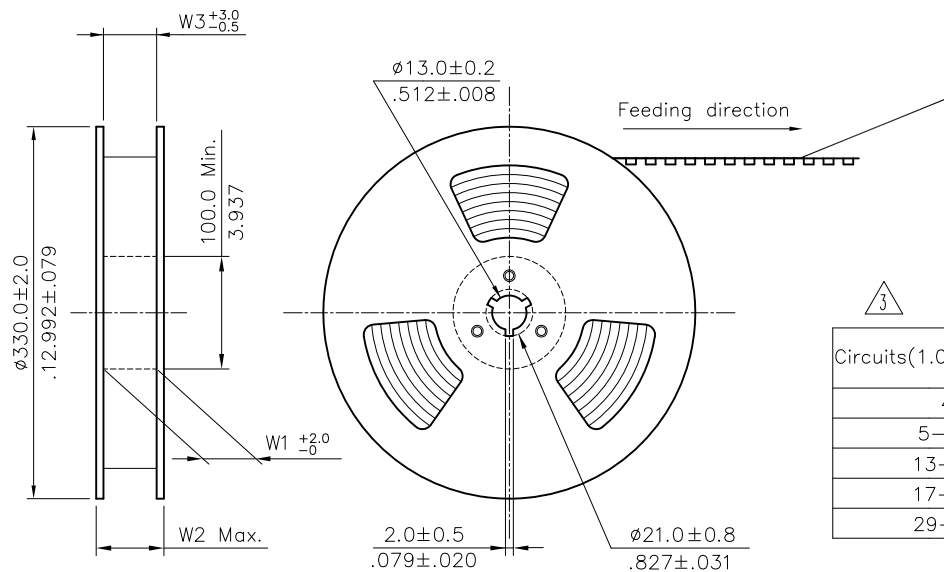

- NOTES:
1. 10 sprocket hole pitch cumulative tolerance ± 0.20
 2. Carrier camber is within 1 mm in 250 mm.
 3. Material :Transparent Anti-static Polysyrene.
 4. All dimensions meet EIA-481-2 requirements.
 5. Thickness : 0.35 ± 0.05 mm.
 6. Packing length per 22" Reel : 56 Meters.
 7. Component load per 13" Reel : 2000 pcs.

Circuits(1.0mm Pitch)	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
4	16.0(.630)	—	16.5(.650)	22.5(.885)	16.5(.650)	11
5-12	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
13-16	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
17-28	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
29-39	56.0(2.204)	52.50(2.067)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

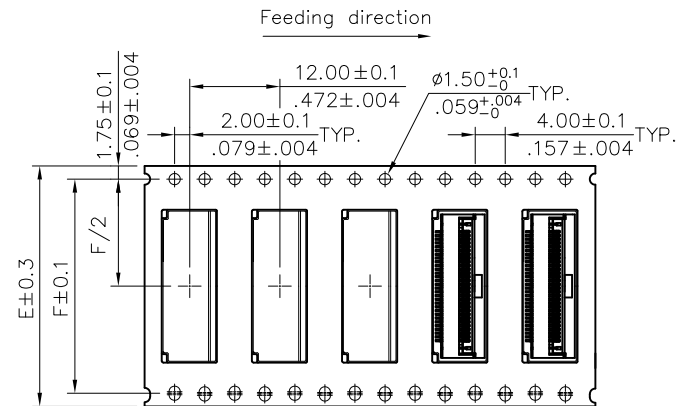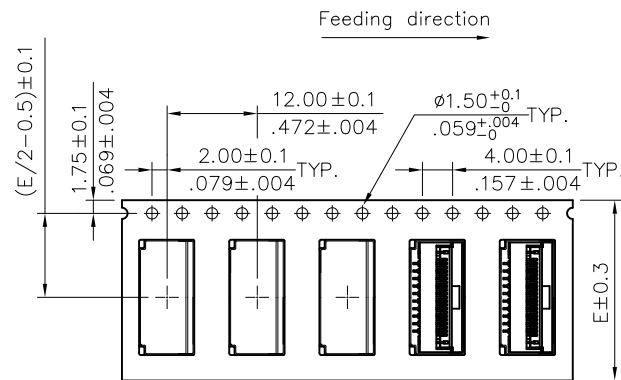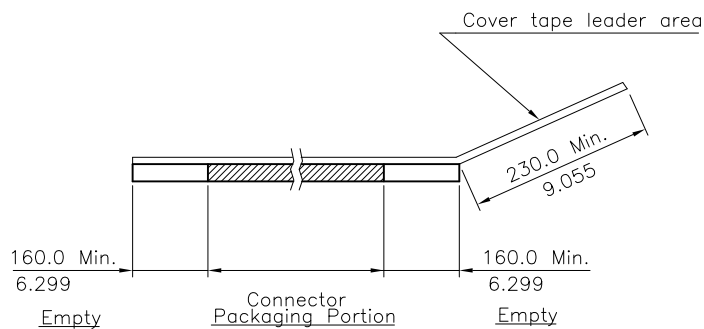

WIDTH : 16.24 mm Carrier

WIDTH : 32.44,56 mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

FPA-WHB221R-xx-LF
SERIES
90°SMT
LEADFREE
04~39WAY
REEL
HIGH 2.2mm
BOTTOM CONTACT
HINGED ZIF

DESCRIPTION: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR

煜倫股份有限公司

www.morethanall.com