


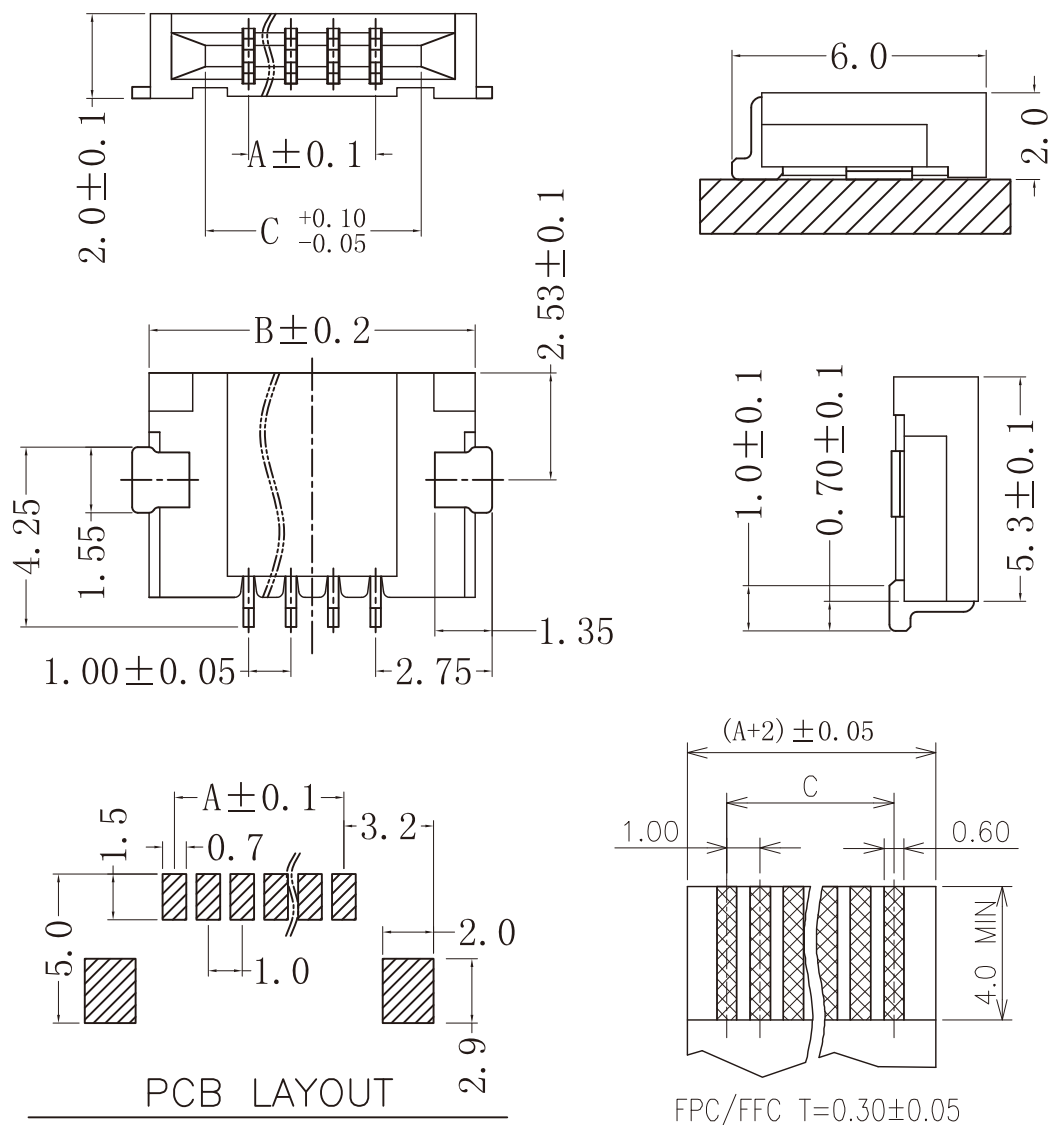

Material:

- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
- 1.2 Terminal: Copper Alloy.

Electrical:

- 2.1 Current Rating: 1.0 AMP.
- 2.2 Dielectric Withstanding Voltage: 500V AC MIN.
- 2.3 Insulation Resistance: 500M Ω MIN.
- 2.4 Contact Resistance: 30m Ω MAX.

PIN NO.	DIM. A	DIM. B	DIM. C
4~N~20	N-1.0	N+3.7	N+1.1

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

FPA-WL2E20-xx-LF
SERIES | | | | LEADFREE
| | | | 04~20 WAY
90°SMT | | | | HIGH 2.0mm
NON ZIF | | | | METAL EAR
| | | | DUAL CONTACT

DESCRIPTION: 1.0mm non-ZIF FPC SMT R/A H=2.0