
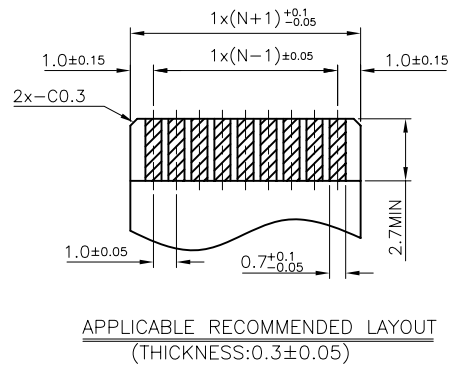


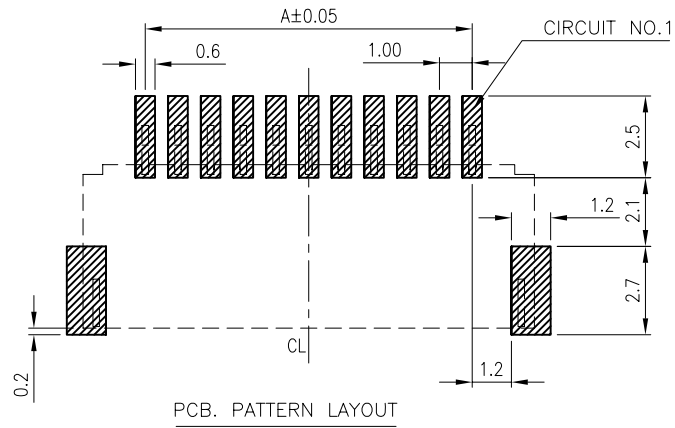

NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0;
- 1.2 CONTACT: COPPER ALLOY
- 1.3 FITTING NAIL: COPPER ALLOY

2. FINISH:

2.1 CONTACT:



- 50u" MIN. NICKEL UNDERPLATING OVERALL.
- 1: GOLD FLASH.
- N: 100u" MIN MATT TIN.
- L: 100u" MIN PURE TIN.

2.2 FITTING NAIL:

- 50u" MIN. NICKEL UNDERPLATING OVERALL.
- 1: GOLD FLASH.
- N: 100u" MIN MATT TIN.
- L: 100u" MIN PURE TIN.

3. REFLOW SOLDER CAPABLE TO 260°C

4. OTHER: SHELL ALIGNMENT LINES,BULGE 0.05mm MAX.

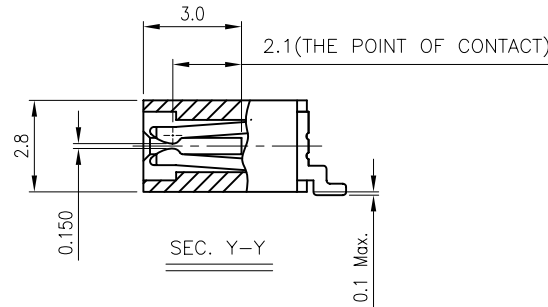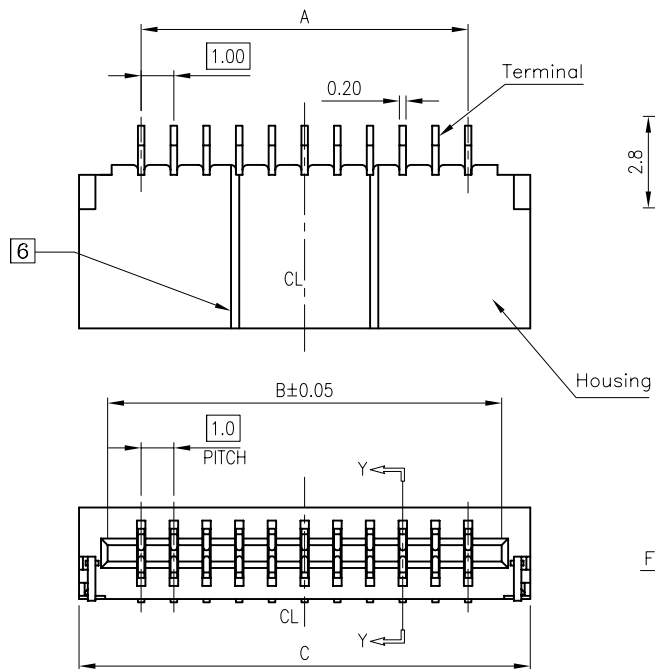

CKT	Dim A	Dim B	Dim C	CKT	Dim A	Dim B	Dim C
4	3.0	5.05	6.8	18	17.0	19.05	20.8
5	4.0	6.05	7.8	19	18.0	20.05	21.8
6	5.0	7.05	8.8	20	19.0	21.05	22.8
7	6.0	8.05	9.8	21	20.0	22.05	23.8
8	7.0	9.05	10.8	22	21.0	23.05	24.8
9	8.0	10.05	11.8	23	22.0	24.05	25.8
10	9.0	11.05	12.8	24	23.0	25.05	26.8
11	10.0	12.05	13.8	25	24.0	26.05	27.8
12	11.0	13.05	14.8	26	25.0	27.05	28.8
13	12.0	14.05	15.8	27	26.0	28.05	29.8
14	13.0	15.05	16.8				
15	14.0	16.05	17.8				
16	15.0	17.05	18.8				
17	16.0	18.05	19.8				

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

FPA-WL2E28-xx-LF

SERIES

LEADFREE

04~27 WAY

HIGH 2.8mm

METAL EAR

DUAL CONTACT

DESCRIPTION: 1.0mm NON-ZIF FPC CONN. SMT R/A B/C TYPE