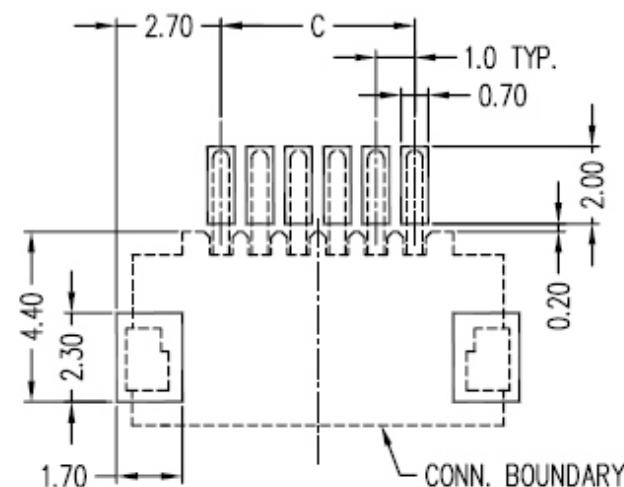
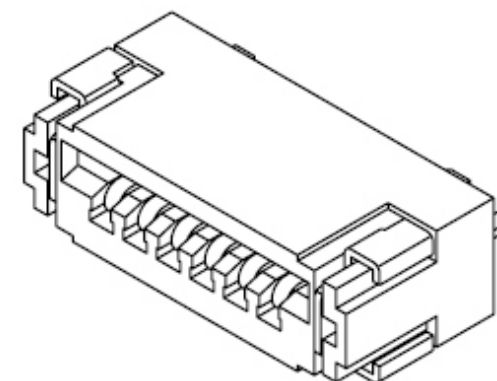
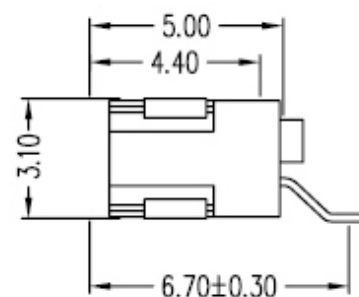
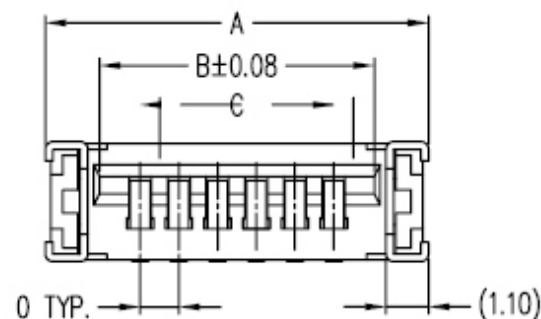

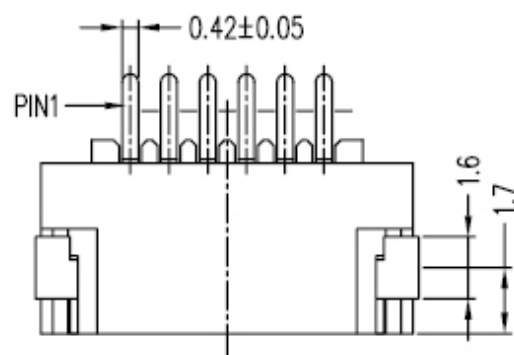


MATERIAL

Insulator: PA9T;UL94V-0 Rated.
 Insulator Color: Ivory
 Contact: Phosphor Bronze
 Me: Brass
 Plating: See Ordering Information

PERFORMANCE CHARACTERISTICS

Operating Voltage: 50 VAC Max.
 Current Rating: 1.0 Amp Max.
 Contact Resistance: 30 mΩ Max.
 Insulation Resistance: 500 MΩ Min.
 Dielectric Withstanding Voltage: 500 VAC RMS.
 Operating Temperature: -40°C TO +85°C
 Accommodated FFC/FPC Thickness: 0.25~0.35mm
 Processing Temperature: 220°~250° for 30 sec

**RoHS Compliant**

TOLERANCES ARE

照片框

ORDER INFORMATION

FPA-WLB31N-xx-LF
 SERIES | | | | LEADFREE
 | | | | 04~30WAY
 | | | | INNER EAR
 | | | | HIGH 3.1mm
 90°SMT | | | | BOTTOM/CONTACT
 | | | | NON ZIF

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X, ±

CHECKED BY GENIUS

X, ±

UNIT / mm

SCALE 1:1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

DESCRIPTION: