


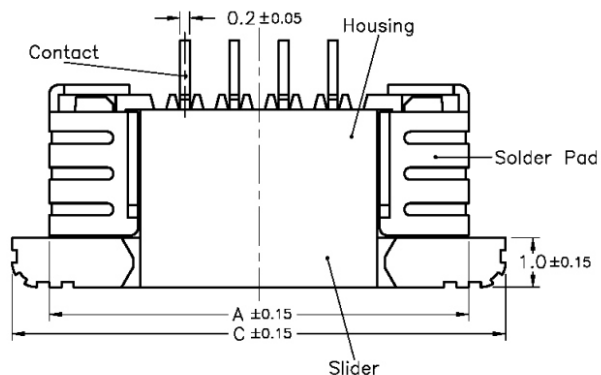

NOTE:

1.MATERIAL:

HOUSING:THERMOPLASTIC
SLIDER:THERMOPLASTIC
CONTACTS:COPPER ALLOY
SOLDER PAD:COPPER ALLOY


2.PLATING:

CONTACTS:SEE ORDERING INFORMATION
SOLDER PAD:SEE ORDERING INFORMATION




3.OPERATING VOLTAGE:50V

CURRENT RATING:0.5A


OPERATING TEMPERATURE:-55°C ~ +85°C

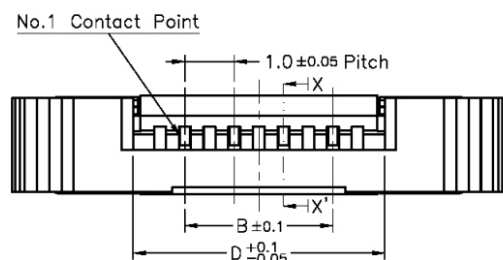

PCB Layout

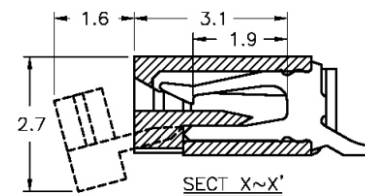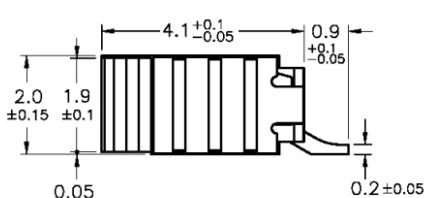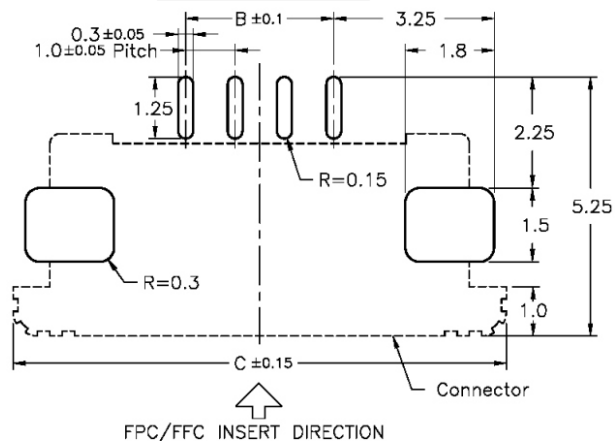

Applicable FPC

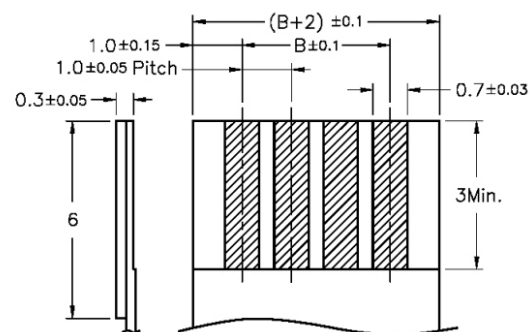

No.of Contacts	DIM. A	DIM. B	DIM. C	DIM. D
4	8.5	3	10	5.1
5	9.5	4	11	6.1
6	10.5	5	12	7.1
7	11.5	6	13	8.1
8	12.5	7	14	9.1
9	13.5	8	15	10.1
10	14.5	9	16	11.1
11	15.5	10	17	12.1
12	16.5	11	18	13.1
13	17.5	12	19	14.1
14	18.5	13	20	15.1
15	19.5	14	21	16.1
16	20.5	15	22	17.1
17	21.5	16	23	18.1
18	22.5	17	24	19.1
19	23.5	18	25	20.1
20	24.5	19	26	21.1
21	25.5	20	27	22.1
22	26.5	21	28	23.1
23	27.5	22	29	24.1
24	28.5	23	30	25.1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION





X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPA-WZA201R-xx-LF
SERIES T T LEADFREE
04~24WAY
REEL
HIGH 2.0mm
90°SMT UPPER CONTACT
ZIF

DESCRIPTION:

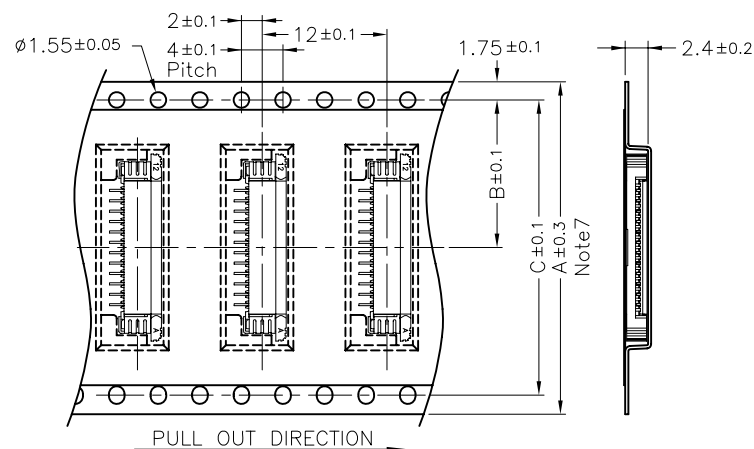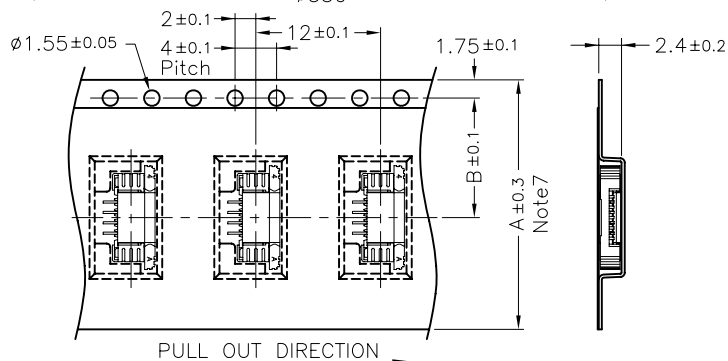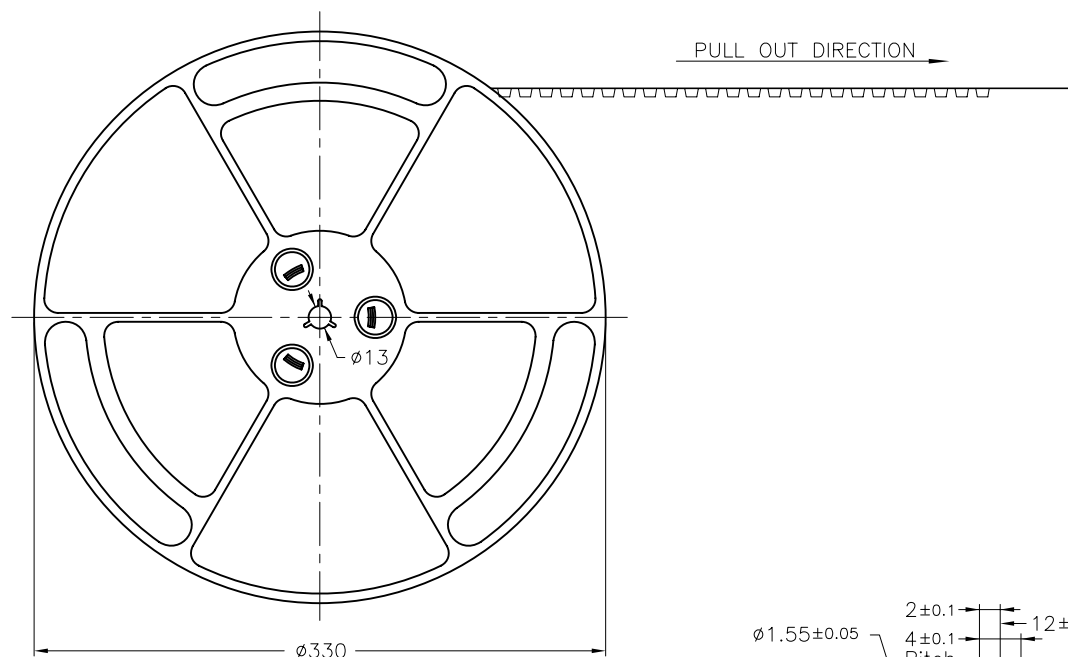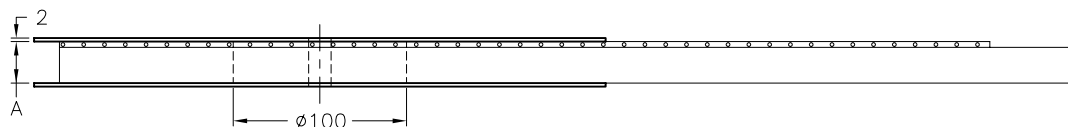

Note:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2
- 2.Carrier camber is within 1 mm in 100mm.
- 3.Material : Black Conductive Polystyrene Alloy
100% recyclable.
- 4.All dimensions meet EIA-481-B requirements.
- 5.Thickness : 0.3 ± 0.05 mm
- 6.Component load per 13" reel :2000 pcs.
- 7.For tape width (dimension A) 24mm a pilot hole is provided on one side.
For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

No.of Contacts	DIM. A Note7	DIM. B	DIM. C
4	24	11.5	—
11			
12	32	14.2	28.4
16			
17	44	20.2	40.4
24			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

FPA-WZA201R-xx-LF
SERIES T T LEADFREE
04~24WAY
REEL
HIGH 2.0mm
90°SMT UPPER CONTACT
ZIF

DESCRIPTION: