

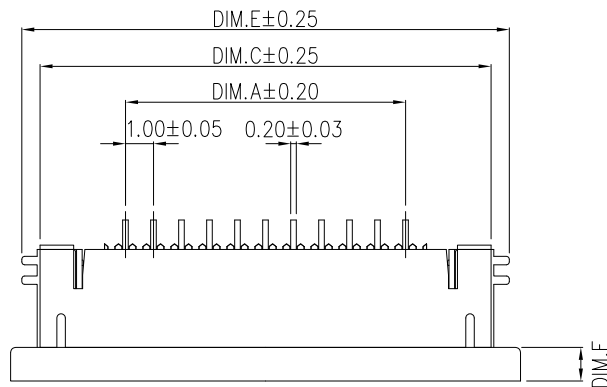

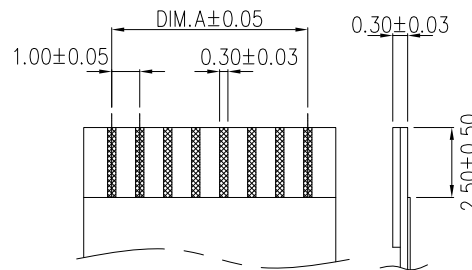
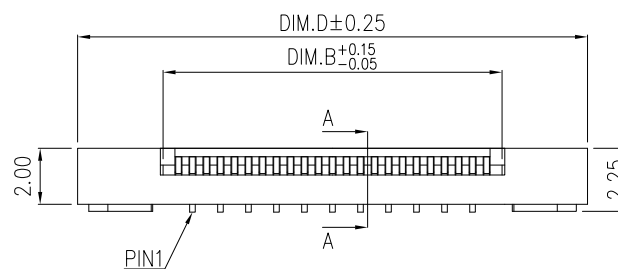


SECTION A-A

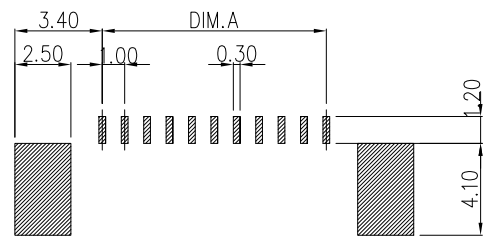

APPLICABLE FFC/FPC

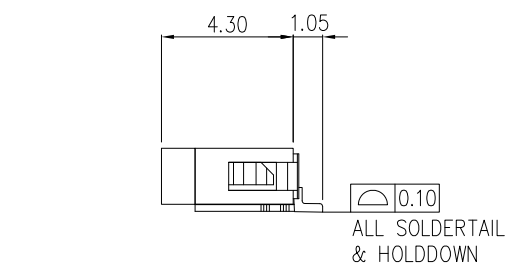

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

- SPEC :
- 1.Housing:High-Temp Plastic,UL94-V
Color:Natural
 - 2.Locker:High-Temp Plastic,UL94-V
Color:Black
 - 3.Contact:TIN PLATING OR G/F GOLD PLATING
:NICKEL UNDERPLATED OVERALL.
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
 - 4.Solder Tab:BRASS
 - 5.Temperature Rating:-25°C~+85°C
 - 6.Dielectric Withstanding Voltage:500V AC/Min

● : 表示現有可提供PIN數

	PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F
	4	3.00	5.10	9.10	11.20	10.40	0.80
	5	4.00	6.10	10.10	12.20	11.40	
	6	5.00	7.10	11.10	13.20	12.40	
	7	6.00	8.10	12.10	14.20	13.40	
	8	7.00	9.10	13.10	15.20	14.40	
	9	8.00	10.10	14.10	16.20	15.40	
	10	9.00	11.10	15.10	17.20	16.40	
	11	10.00	12.10	16.10	18.20	17.40	
	12	11.00	13.10	17.10	19.20	18.40	
	13	12.00	14.10	18.10	20.20	19.40	
	14	13.00	15.10	19.10	21.20	20.40	
	15	14.00	16.10	20.10	22.20	21.40	1.20
	16	15.00	17.10	21.10	23.20	22.40	
	17	16.00	18.10	22.10	24.20	23.40	
	18	17.00	19.10	23.10	25.20	24.40	
	19	18.00	20.10	24.10	26.20	25.40	
	20	19.00	21.10	25.10	27.20	26.40	
	21	20.00	22.10	26.10	28.20	27.40	
	22	21.00	23.10	27.10	29.20	28.40	
	23	22.00	24.10	28.10	30.20	29.40	
	24	23.00	25.10	29.10	31.20	30.40	
	25	24.00	26.10	30.10	32.20	31.40	
	26	25.00	27.10	31.10	33.20	32.40	
	27	26.00	28.10	32.10	34.20	33.40	
	28	27.00	29.10	33.10	35.20	34.40	
	29	28.00	30.10	34.10	36.20	35.40	
	30	29.00	31.10	35.10	37.20	36.40	



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-WZA22-xx-LF

SERIES
LEADFREE
04~30WAY
HIGH 2.25mm
UPPER CONTACT
ZIF
90°SMT

DESCRIPTION: FPC 1.0PH 2.0H 抽屜貼上接