
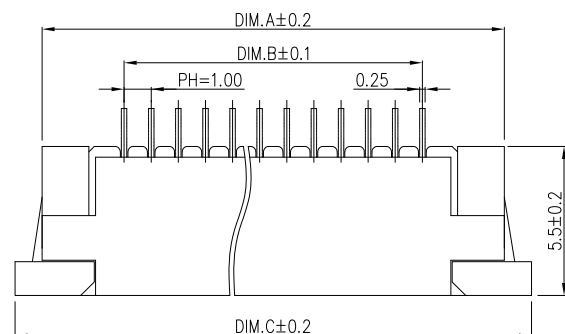
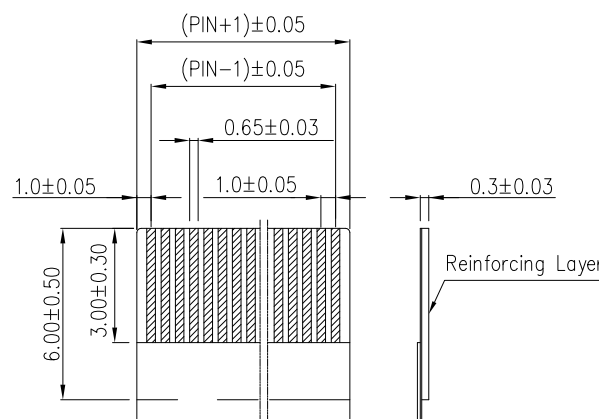



PCB Layout



RECOMMENDED FFC/FPC DIM.

SPEC :

1. Housing: Hight-Temp Plastic, UL94-V
Color: Nature (Lvory) (LCP)
2. Locker: Hight-Temp Plastic, UL94-V
Color: Black (LCP)
3. Contact: Phosphor Bronze (C5191)
4. Solder Tab: BRASS (C2680)
5. Operating Voltage (Max): 50V AC
6. Current Rating (Max): 1.0A DC
7. Operating Temperature Range : -45°C ~ +85°C

PIN NO.	DIM A	DIM B	DIM C	DIM D
4	9.10	3.00	11.00	5.10
5	10.10	4.00	12.00	6.10
6	11.10	5.00	13.00	7.10
7	12.10	6.00	14.00	8.10
8	13.10	7.00	15.00	9.10
9	14.10	8.00	16.00	10.10
10	15.10	9.00	17.00	11.10
11	16.10	10.00	18.00	12.10
12	17.10	11.00	19.00	13.10
13	18.10	12.00	20.00	14.10
14	19.10	13.00	21.00	15.10
15	20.10	14.00	22.00	16.10
16	21.10	15.00	23.00	17.10
17	22.10	16.00	24.00	18.10
18	23.10	17.00	25.00	19.10
19	24.10	18.00	26.00	20.10
20	25.10	19.00	27.00	21.10
21	26.10	20.00	28.00	22.10
22	27.10	21.00	29.00	23.10
23	28.10	22.00	30.00	24.10
24	29.10	23.00	31.00	25.10
25	30.10	24.00	32.00	26.10
26	31.10	25.00	33.00	27.10
27	32.10	26.00	34.00	28.10
28	33.10	27.00	35.00	29.10
29	34.10	28.00	36.00	30.10
30	35.10	29.00	37.00	31.10
31	36.10	30.00	38.00	32.10
32	37.10	31.00	39.00	33.10
33	38.10	32.00	40.00	34.10
34	39.10	33.00	41.00	35.10
35	40.10	34.00	42.00	36.10
36	41.10	35.00	43.00	37.10
37	42.10	36.00	44.00	38.10
38	43.10	37.00	45.00	39.10
39	44.10	38.00	46.00	40.10
40	45.10	39.00	47.00	41.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-WZA25-xx-LF
SERIES T T T LEADFREE
04~40WAY
HIGH 2.5mm
UPPER CONTACT
ZIF
90°SMT

DESCRIPTION: 1.0PH 2.5H 抽屜臥貼上接