



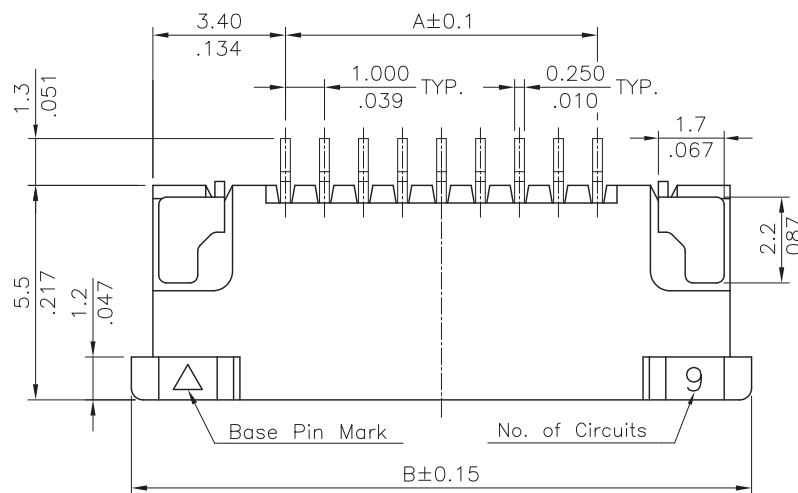

Material :




- * Body : High Temperature plastic UL 94V-0
- * Slider : High Temperature plastic UL 94V-0
Color Black
- * Contact : Copper Alloy
- * Fixed tab : Copper Alloy with Matte Tin plated

$$A = 1.00 * \text{No. of Spaces}$$


$$B = A + 8.0$$

$$C = A + 2.1$$


* Available in 4 through 32 circuits

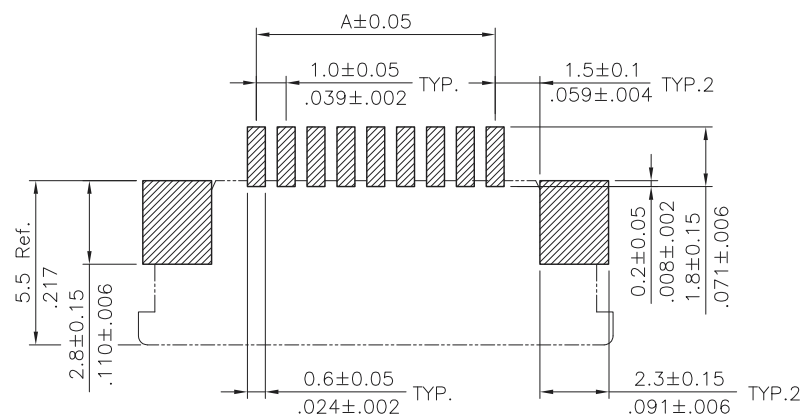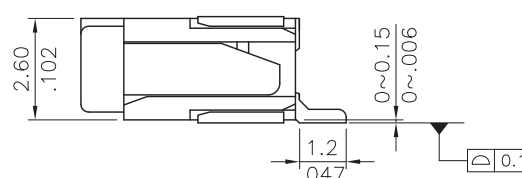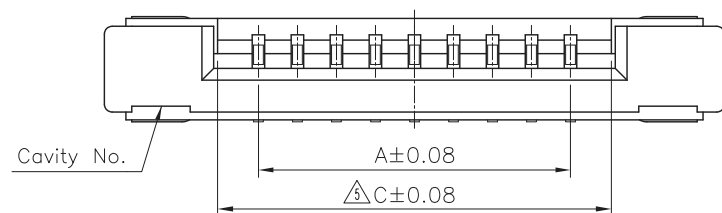

Sold Pad Pattern

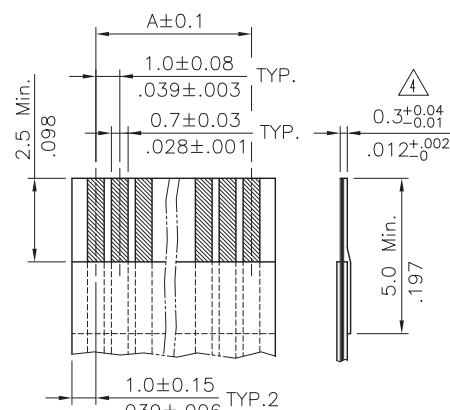

Accommodated FFC

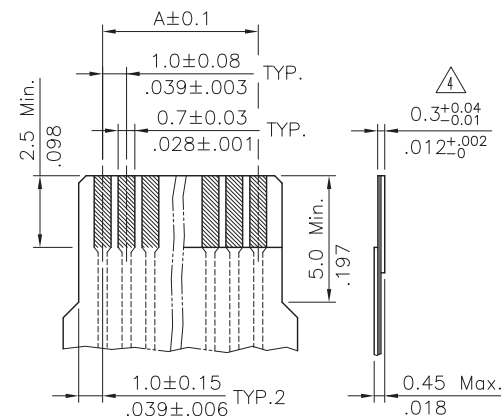

Accommodated FPC

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-WZA26R-xx-LF

SERIES

LEADFREE

04~32WAY

REEL


HIGH 2.6mm

UPPER CONTACT

90°SMT

ZIF




DESCRIPTION:

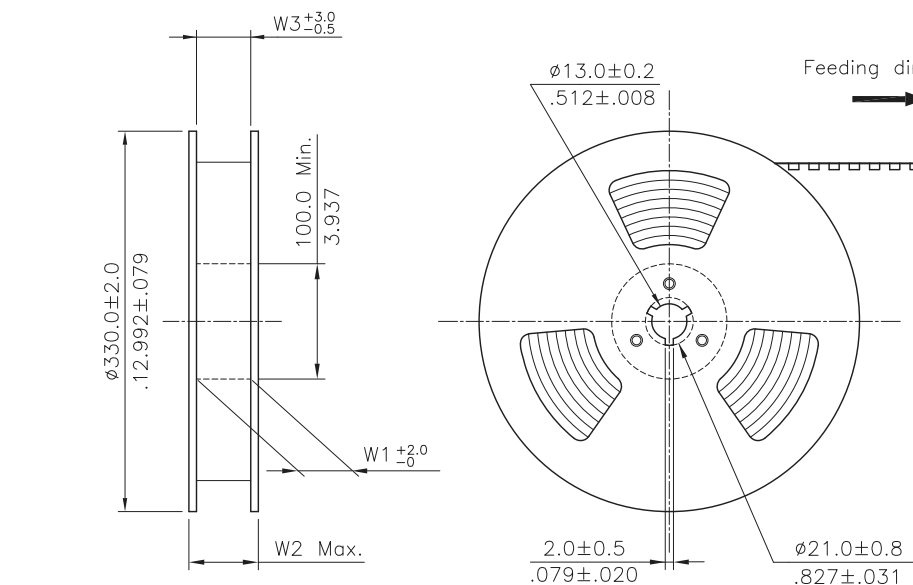

NOTE :

1. 10 sprocket hole pitch cumulative tolerance ± 0.20
2. Carrier camber is within 1 mm in 100 mm .
3. Material : Transparent Conductive Polystyrene Alloy (UP-5000) 100% recyclable.
4. All dimensions meet EIA-481-3 requirements.
5. Thickness : 0.33 ± 0.03 mm.
- 6 Packing length per 22" reel : 75.0 Meters.
7. Component load per 13" reel : 2000 pcs.

Circuits	Dimension				
	E	F	W1	W2	W3
4-8	24.0(.945)	-	24.5(.965)	30.5(1.201)	24.5(.965)
9-14	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)
15-25	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)
26-32	56.0(2.205)	52.40(2.062)	56.5(2.224)	62.5(2.460)	56.5(2.224)

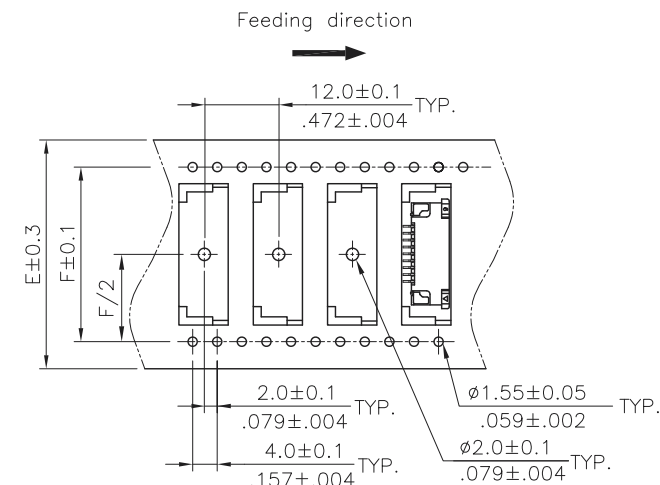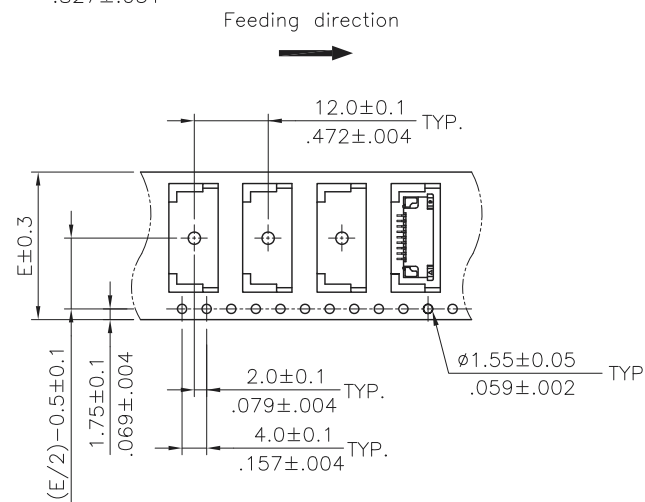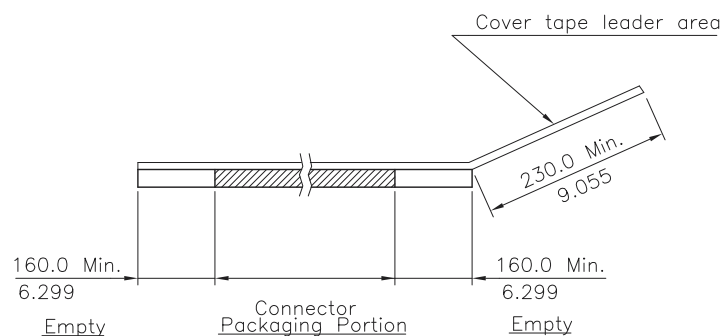

WIDTH : 24 mm Carrier

WIDTH : 32,44,56 mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
X. $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

FPA-WZA26R-xx-LF
SERIES
90°SMT
ZIF
LEADFREE
04~32WAY
REEL
HIGH 2.6mm
UPPER CONTACT

DESCRIPTION: