

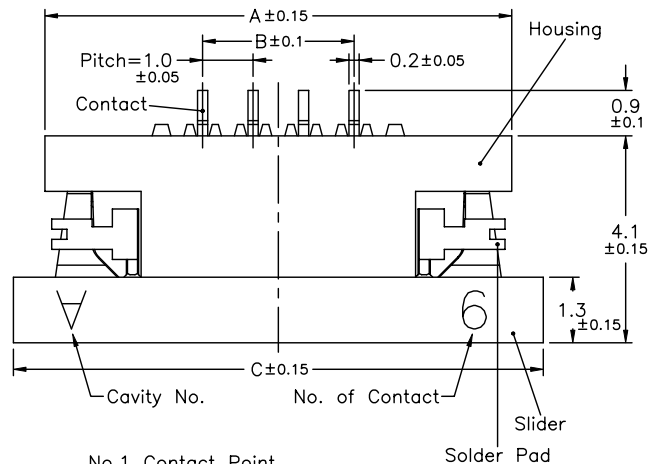
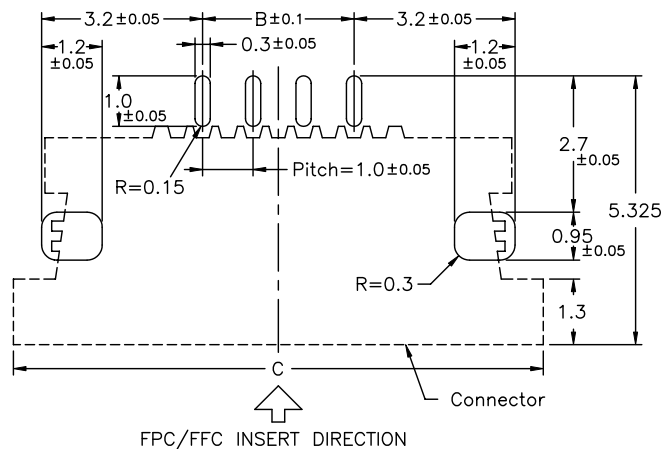


PCB Layout

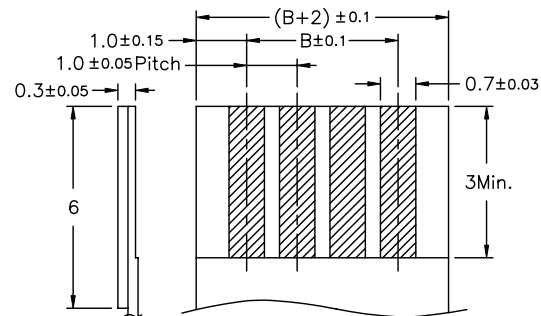

- NOTE:
- 1.MATERIAL:
HOUSING:THERMOPLASTIC
SLIDER:THERMOPLASTIC
CONTACTS:COPPER ALLOY
SOLDER PAD:COPPER ALLOY
 - 2.PLATING:
CONTACTS:SEE ORDERING INFORMATION
SOLDER PAD:SEE ORDERING INFORMATION
 - 3.RATING:
OPERATING VOLTAGE:5"
CURRENT RATING:0.5A
OPERATING TEMPERATURE:-55°C ~ +85°C

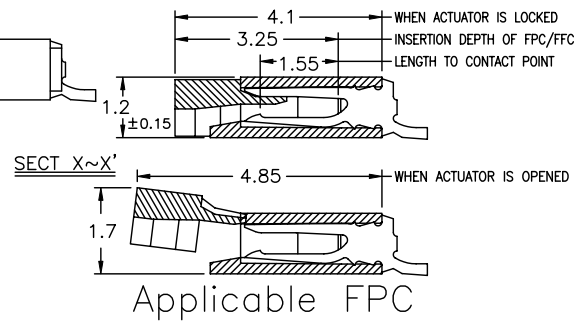

No.of Contacts	DIM. A	DIM. B	DIM. C	DIM. D
4	9.25	3	10.5	5.1
5	10.25	4	11.5	6.1
6	11.25	5	12.5	7.1
7	12.25	6	13.5	8.1
8	13.25	7	14.5	9.1
9	14.25	8	15.5	10.1
10	15.25	9	16.5	11.1
11	16.25	10	17.5	12.1
12	17.25	11	18.5	13.1
13	18.25	12	19.5	14.1
14	19.25	13	20.5	15.1
15	20.25	14	21.5	16.1
16	21.25	15	22.5	17.1
17	22.25	16	23.5	18.1
18	23.25	17	24.5	19.1
19	24.25	18	25.5	20.1
20	25.25	19	26.5	21.1
21	26.25	20	27.5	22.1
22	27.25	21	28.5	23.1
23	28.25	22	29.5	24.1
24	29.25	23	30.5	25.1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPA-WZB12-xx-LF
SERIES T T T LEADFREE
04~24WAY
HIGH 1.2mm
BOTTOM CONTACT
ZIF
90°SMT

DESCRIPTION: