

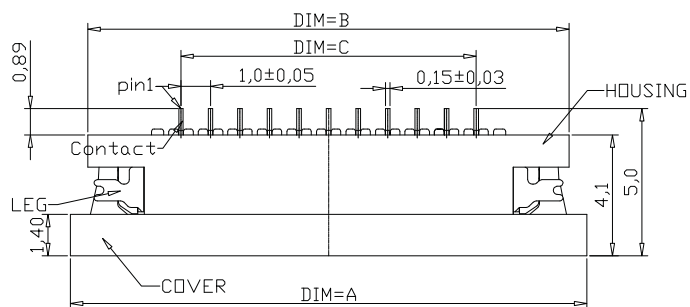



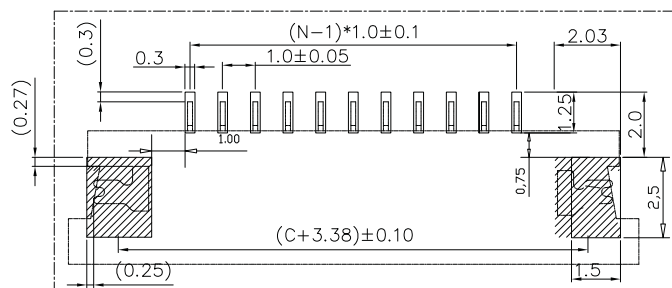


Bottom connection Series No.



RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05

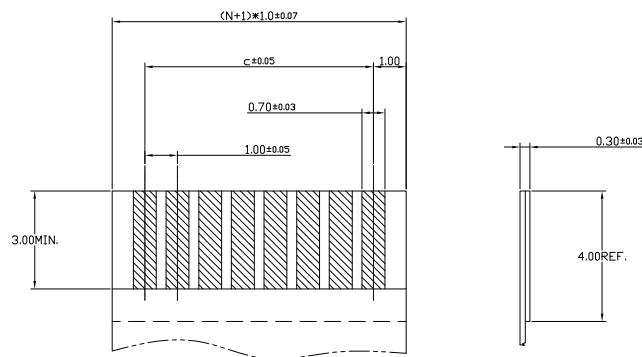

APPLICABLE FFC
TOLERANCE:±0.05

SPEC :

1. Housing: Hight-Temp Plastic, UL94-V
Color: Nature(Lvory)(LCP)
2. Locker: Hight-Temp Plastic, UL94-V
Color: Black(LCP)
3. Contact: Phosphor Bronze(C5191)
4. Solder Tab: BRASS(C2680)

No. of contacts	Dimensions			
	A	B	C	D
4	10.50	9.30	3.00	5.08
5	11.50	10.30	4.00	6.08
6	12.50	11.30	5.00	7.08
7	13.50	12.30	6.00	8.08
8	14.50	13.30	7.00	9.08
9	15.50	14.30	8.00	10.08
10	16.50	15.30	9.00	11.08
11	17.50	16.30	10.00	12.08
12	18.50	17.30	11.00	13.08
13	19.50	18.30	12.00	14.08
14	20.50	19.30	13.00	15.08
15	21.50	20.30	14.00	16.08
16	22.50	21.30	15.00	17.08
17	23.50	22.30	16.00	18.08
18	24.50	23.30	17.00	19.08
19	25.50	24.30	18.00	20.08
20	26.50	25.30	19.00	21.08
21	27.50	26.30	20.00	22.08
22	28.50	27.30	21.00	23.08
23	29.50	28.30	22.00	24.08
24	30.50	29.30	23.00	25.08
25	31.50	30.30	24.00	26.08
26	32.50	31.30	25.00	27.08
27	33.50	32.30	26.00	28.08
28	34.50	33.30	27.00	29.08
29	35.50	34.30	28.00	30.08

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±




PPOJECTION

照片框


ORDER INFORMATION

FPA-WZB12R-xx-LF
SERIES T T T LEADFREE
04~29WAY
REEL
HIGH 1.2mm
90°SMT BOTTOM CONTACT
ZIF


DESCRIPTION:

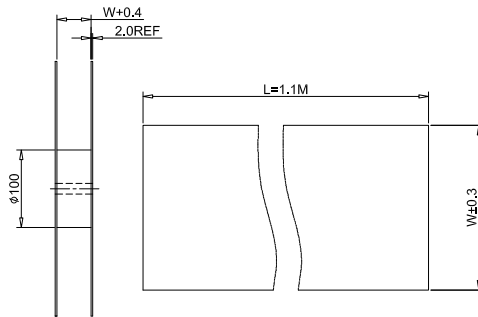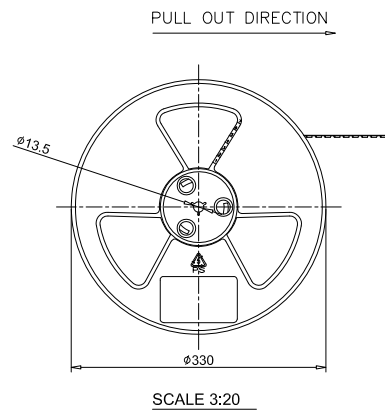

PULL OUT DIRECTION

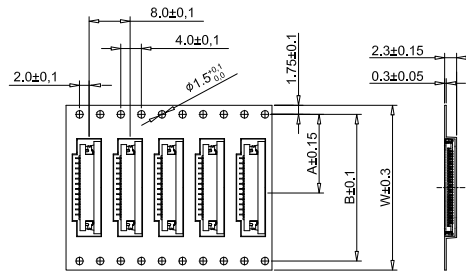

PULL OUT DIRECTION

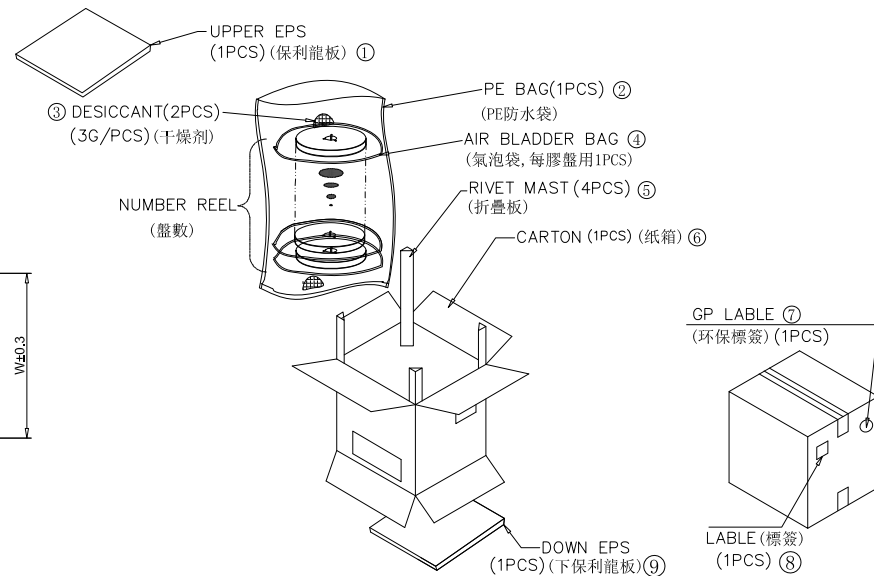

NOTES:

- 1.CARTON SPEC.: 350*350*340mm(OUT DIM), PAPER THICKNESS=5mm
- 2.UPPER AND DOWN EPS: 340*340mm THICKNESS=8mm.
- 3.THE COVER TAPE PEELING FORCE: 30~100g.
- 4.PER REEL CASED ONE AIR BLADDER BAG.
- 5.CARRIER TAPE COLIR:BLACK.
- 6.CONNENCE ANG ENDED 200mm(200PCS) DON'T PUT IN PRODUCE.

PIN NO.	W	A	B	A0	B0	PCS/REEL	REEL/CARTON	SUM(PCS)
04 PIN~ 11 PIN	24	11.5	—	6.4+	5.5	2000	10	40000
12 PIN~17 PIN	32	14.2	28.4	(n-4)*0.5	5.5	2000	8	32000
18 PIN~27 PIN	44	20.2	40.4	(n=pin no)	5.5	2000	6	24000
28 PIN~30 PIN	56	26.2	52.4		5.5	2000	5	20000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-WZB12R-xx-LF
SERIES
LEADFREE
04~29WAY
REEL
HIGH 1.2mm
BOTTOM CONTACT
90°SMT
ZIF

DESCRIPTION: 1.0PH 1.2H 抽屜臥貼下接包裝圖