

性能:

额定电流: 0.5A

额定电压: 50V

耐电压: 500V

接触电阻: $\leq 20\text{m}\Omega$

绝缘电阻: $800\text{M}\Omega$






工作温度: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$

塑件(材质): LCP, UL94V-0

锁扣(材质): LCP, UL94V-0


插簧(材质): 磷青铜, 镀锡/镀金

焊片(材质): 磷青铜, 镀锡/镀金

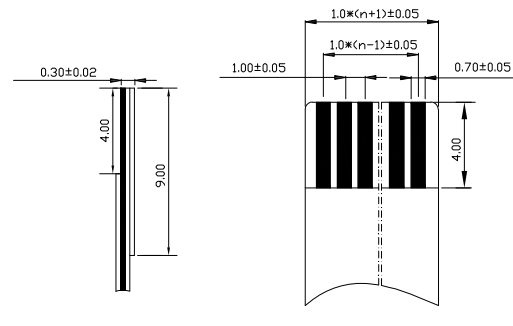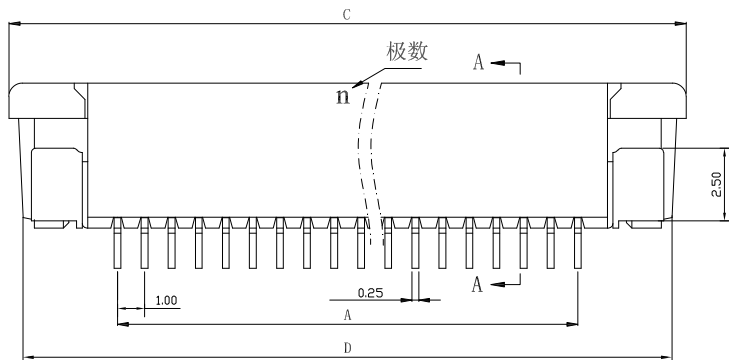

适用扁平电缆

PIN数	A	B	C	D
4	3.00	5.30	11.10	10.10
5	4.00	6.30	12.10	11.10
6	5.00	7.30	13.10	12.10
7	6.00	8.30	14.10	13.10
8	7.00	9.30	15.10	14.10
9	8.00	10.30	16.10	15.10
10	9.00	11.30	17.10	16.10
11	10.00	12.30	18.10	17.10
12	11.00	13.30	19.10	18.10
13	12.00	14.30	20.10	19.10
14	13.00	15.30	21.10	20.10
15	14.00	16.30	22.10	21.10
16	15.00	17.30	23.10	22.10
17	16.00	18.30	24.10	23.10
18	17.00	19.30	25.10	24.10
19	18.00	20.30	26.10	25.10
20	19.00	21.30	27.10	26.10
21	20.00	22.30	28.10	27.10
22	21.00	23.30	29.10	28.10
23	22.00	24.30	30.10	29.10
24	23.00	25.30	31.10	30.10
25	24.00	26.30	32.10	31.10
26	25.00	27.30	33.10	32.10
27	26.00	28.30	34.10	33.10
28	27.00	29.30	35.10	34.10
29	28.00	30.30	36.10	35.10
30	29.00	31.30	37.10	36.10

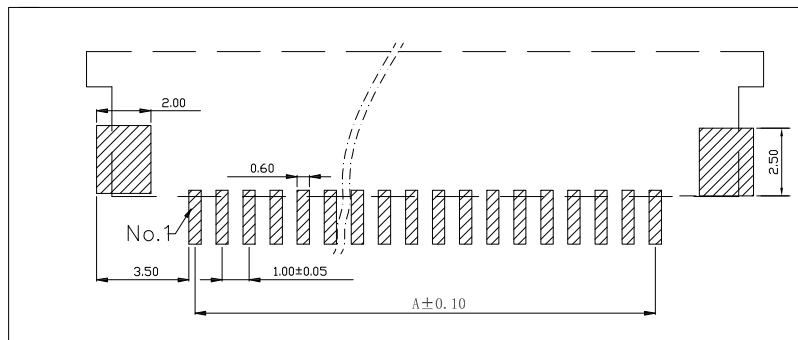

印制电路板(PCB)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±





PPOJECTION

照片框

ORDER INFORMATION


FPA-WZB25R-xx-LF
SERIES
90°SMT
ZIF
LEADFREE
04~30 WAY
REEL
HIGH 2.5mm
BOTTOM CONTACT

DESCRIPTION: FPC 1.0 K型 抽屉下接

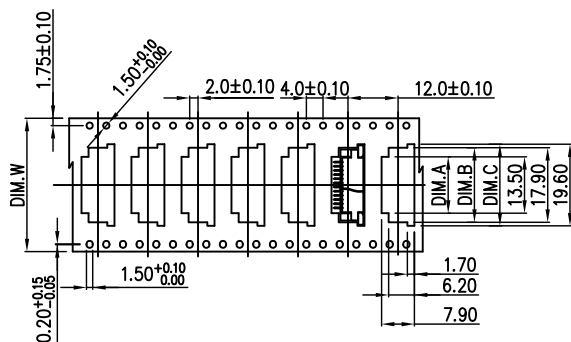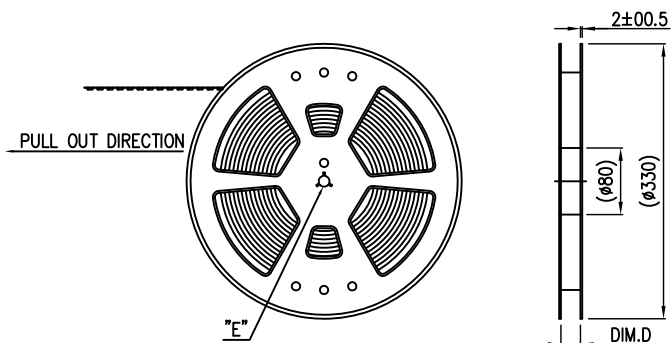


- NOTES:
- 1.Number of Connectors:1000 Pcs/Reel
 - 2.Material
Carrier Tape:PET,PE,PEF
Reel:PS
 - 3.Lead Tape Length:

PULL OUT DIRECTION



- 4.Peeling off force of top tape
0.3N ~ 1.1N
(Peeling direction as shown in following fig)

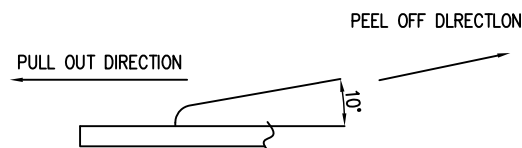

PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.W	單邊/雙邊孔
4	4.80	9.90	11.60	25.50	24.50	單邊孔
5	5.80	10.90	12.60	25.50	24.50	單邊孔
6	6.80	11.90	13.60	25.50	24.50	單邊孔
7	7.80	12.90	14.60	25.50	24.50	單邊孔
8	8.80	13.90	15.60	25.50	24.50	單邊孔
9	9.80	14.90	16.60	25.50	24.50	單邊孔
10	10.80	15.90	17.60	25.50	24.50	單邊孔
11	11.80	16.90	18.60	33.50	32.00	雙邊孔
12	12.80	17.90	19.60	33.50	32.00	雙邊孔
13	13.80	18.90	20.60	33.50	32.00	雙邊孔
14	14.80	19.90	21.60	33.50	32.00	雙邊孔
15	15.80	20.90	22.60	45.50	44.00	雙邊孔
16	16.80	21.90	23.60	45.50	44.00	雙邊孔
17	17.80	22.90	24.60	45.50	44.00	雙邊孔
18	18.80	23.90	25.60	45.50	44.00	雙邊孔
19	19.80	24.90	26.60	45.50	44.00	雙邊孔
20	20.80	25.90	27.60	45.50	44.00	雙邊孔
21	21.80	26.90	28.60	45.50	44.00	雙邊孔
22	22.80	27.90	29.60	45.50	44.00	雙邊孔
23	23.80	28.90	30.60	45.50	44.00	雙邊孔
24	24.80	29.90	31.60	45.50	44.00	雙邊孔
25	25.80	30.90	32.60	45.50	44.00	雙邊孔
26	26.80	31.90	33.60	57.50	56.00	雙邊孔
27	27.80	32.90	34.60	57.50	56.00	雙邊孔
28	28.80	33.90	35.60	57.50	56.00	雙邊孔
29	29.80	34.90	36.60	57.50	56.00	雙邊孔
30	30.80	35.90	37.60	57.50	56.00	雙邊孔
31	31.80	36.90	38.60	57.50	56.00	雙邊孔
32	32.80	37.90	39.60	57.50	56.00	雙邊孔

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

FPA-WZB25R-xx-LF
SERIES T LEADFREE
04~32 WAY
REEL
90°SMT HIGH 2.5mm
BOTTOM CONTACT
ZIF

DESCRIPTION: FPC 1.0PH 2.5H 抽屜式上下接 包裝圖

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION