

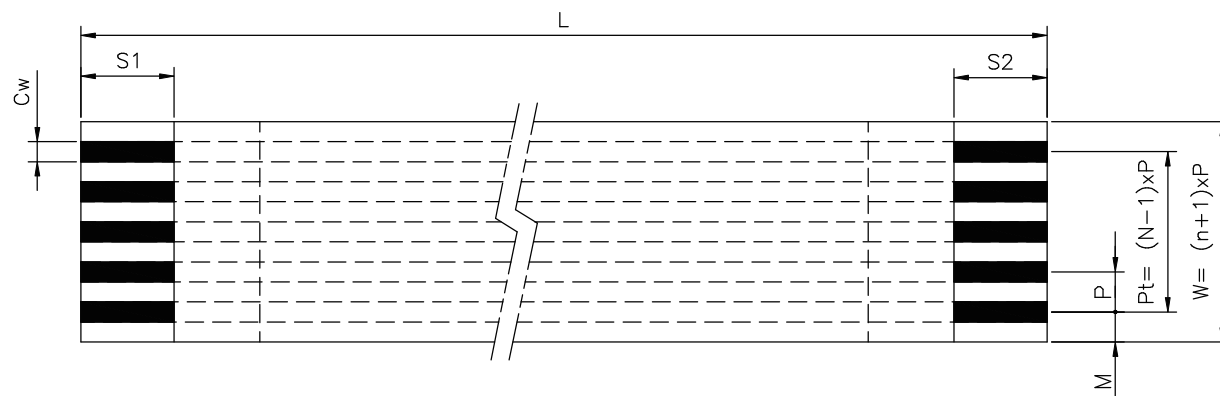




TOLERANCE:

Abbr.	TOLERANCE				
	P=0.5	P=0.8	P=1.0	P=1.25	P=2.54
P	±0.05	±0.08	±0.08	±0.10	±0.20
Pt	±0.08	±0.10	±0.10	±0.15	+0.2 -0.4
W	±0.08	±0.10	±0.10	±0.20	+0.2 -0.4
M	±0.08	±0.15	±0.15	±0.20	±0.30
Cw	±0.02	±0.03	±0.03	±0.03	±0.04
L	(30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm				

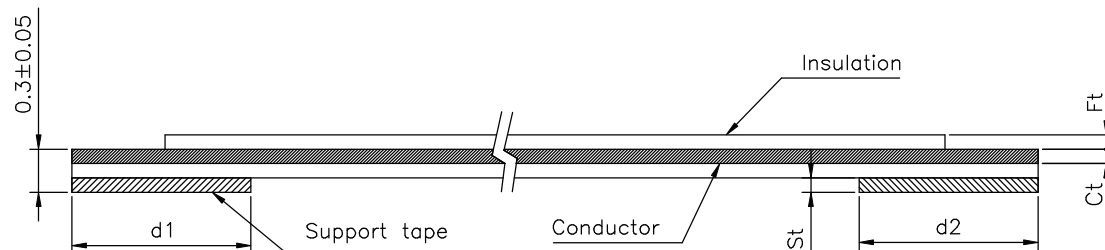

Tolerance of Cutting Tilt

	Dimension
Ft±0.01	0.043
St±0.01	0.225

UL Style:20706

Customer P/N	MORETHANAL L	NO. of Conductor	Dimension											Support Tape Color
			P	Pt	L	W	M	CW	Ct±0.01	S1±1.0	S2±1.0	d1±2.0	d2±2.0	
	FPB-CA20-065	20	1.25	23.75	65	26.25	1.25	0.8	±0.05	5	5	10	10	BLUE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPB-CA20-065-LF

SERIES

LEADFREE

65mm

20 WAY

SAME SIDE

CABLE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: