


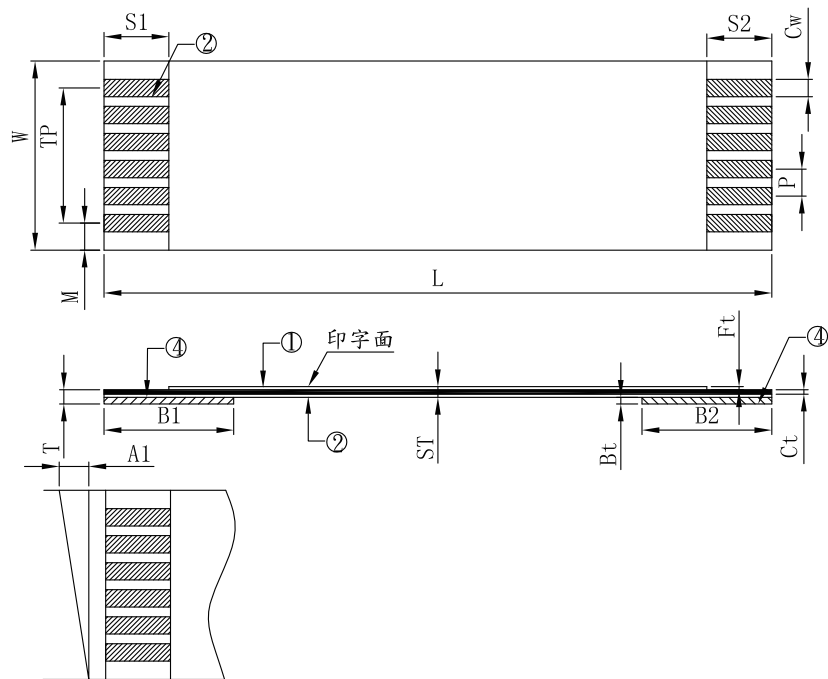

Symbol 标号	Item 项目	Specification 规格
N	No. of Conductors(导体芯数)	26
P	Pitch(间距)	1.25±0.10
TP	Total Pitch(总间距)	31.25±0.20
W	Width(总宽度)	33.75±0.20
M	Margin(边缘宽度)	1.25±0.20
L	Total Length(总长度)	51±2
T	Insertion Thickness(插入厚度)	0.32±0.05
ST	FFC Body Thickness(线身厚度)	0.22±0.03
S1/S2	Conductor Strip Length(裸铜长度)	4/4±1
B1/B2	Supporting tape Length(补强板长度)	10/10±2
Cw	Conductor Width(导体宽度)	0.80±0.03
Ct	Conductor Thickness(导体厚度)	0.100±0.005
Ft	Insulation Film Thickness(绝缘膜厚度)	0.060±0.005
Bt	Supporting tape Thickness(补强板厚度)	0.160±0.005
A1	Slanting(线口倾斜度)	<0.5

ELECTRICAL CHARACTERISTICS

Conductor Resistance: JISC-3102(at20℃) 2.20Ω/M Max.

Insulation Resistance: Apply the voltage of DC 500V
for one minute 100MΩ Min.

Dielectric Strength: Apply AC 500V for one minute.

Continuity Test: Apply microtest machine No Open/Short

Rated voltage & temperature:UL20624 60V 80℃

Material

Insulation: Flame Retardant Polyeste

Color: White

Conductor: Copper with 1u m min.tin-Plating

Supporting Tape: Flame Retardant Polyester

Color: Blue

包装方式:线材每50PCS两端用纸带包好, 30把装IPE袋(需整齐排好),

然后把装好IPE袋的产品用纸板固定好, 10把装一纸箱.

批量不够15000PCS可自行选择合适纸箱

包材	纸箱 K=K 11.6" *9.6" *9.6" 环保ROHS	1/15000	PCS	GC01
	PE袋10.5" *13.5" 有环保标示 环保ROHS	1/1500	PCS	XHSL
	纸板A=A 13.2" *9.8" 环保ROHS	1/1500	PCS	GC01
	纸带 15*0.1" 环保ROHS	0.1	Kg	HY08
4	FFC-ST-0.160*20 环保ROHS	33.75	mm	XSD0
3	FFC-CN-0.100*0.80 环保ROHS	0.9430512	g	MX00
2	FFC-FD-0.060*120 环保ROHS	W=33.75 L=51mm	mm	XSD0
1	FFC-FM-0.060*120 G-NS 环保ROHS	W=33.75 L=43mm	mm	XSD0
序号	品名/规格	用量	单位	代码

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

FPB-CA26-051-LF

SERIES
LEADFREE
51mm
26 WAY
SAME SIDE
CABLE

DESCRIPTION: