


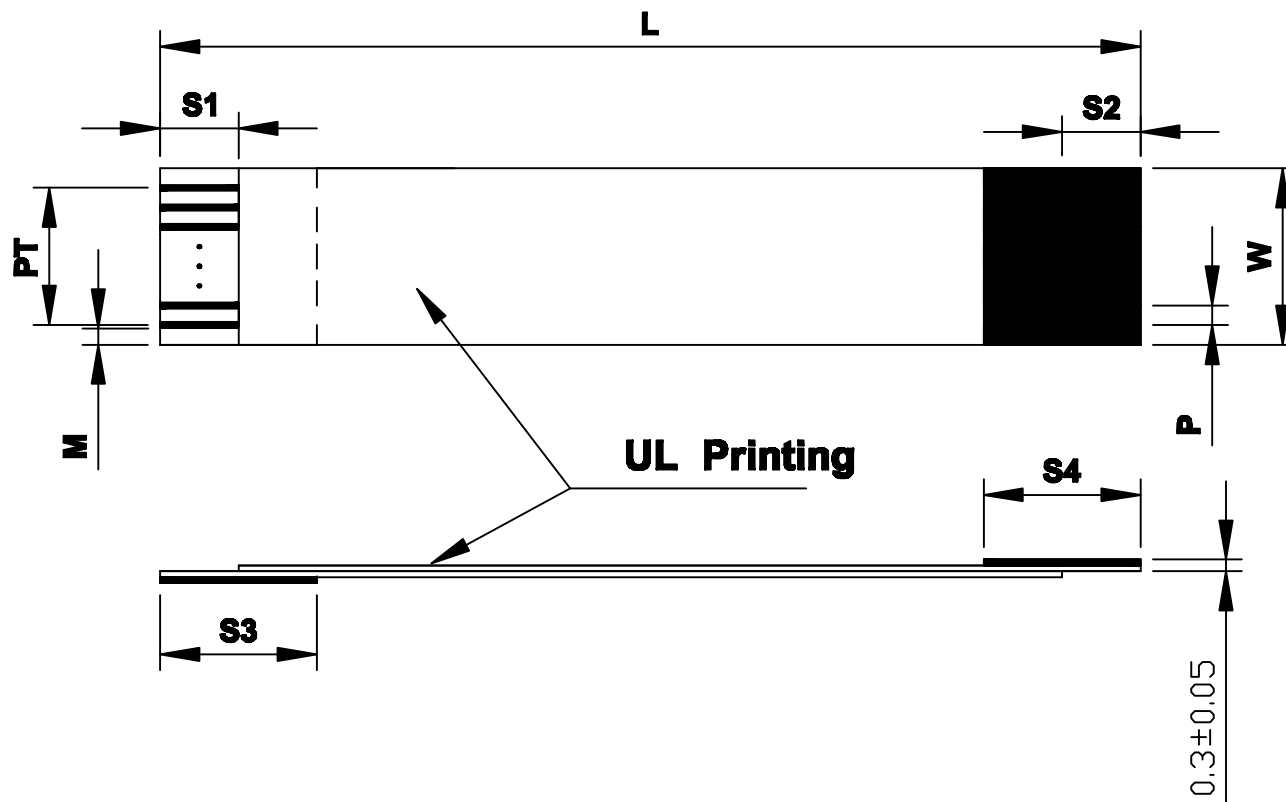

NOTES:

導體數	Num. of conductors	6 Pins
導體	conductor width	0.8*0.05mm
導體間距	Pitch(P)	1.25mm
成品總長度	L	30±3
成品總寬度	W	8.75±0.1
導體總間距	PT	6.25±0.15
邊緣寬度	M	0.85±0.1
露銅長度	S1	4±1
露銅長度	S2	4±1
加強板寬度	S3	7±1
加強板寬度	S4	7±1

Available UL Standard:20624-80°,60V

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPB-CB06-030-LF
SERIES | | | LEADFREE
| | | 30mm
| | | 06 WAY
| | | BOTH SIDES
| | | CABLE

DESCRIPTION: