


代碼	SIZE	TOL	代碼	SIZE	TOL
P	1.25	±0.1	S3	6.0	±1.0
TL	100.0	±1(30-100) ±3(101-300) ±5(301-600) ±8(601-)	A	0	0.50max
IL	92.0		CW	0.8	±0.03
TW	36.25	±0.2	CT	0.05	±0.01
TP	33.75	±0.2	Tt	0.17	±0.02
M	1.25	±0.2	T	0.33	±0.03
S1 S2	4.0	±0.5	補強板貼白膜		
Note					
UL Style : AWM 20624 60V 80 ℃					
Pitch: 1.25mm					
Pin: 28C					
Length: 100mm					
Conductor: Tinned Copper Tin Plated					
InsulationTh:0.06 PET Color : White					
Support Tape Th:0.225 PET Color : Blue					
Printed YEH CHI E134727 AWM 20624 60V 80 ℃ VW-1					
TYPE: B TYPE					

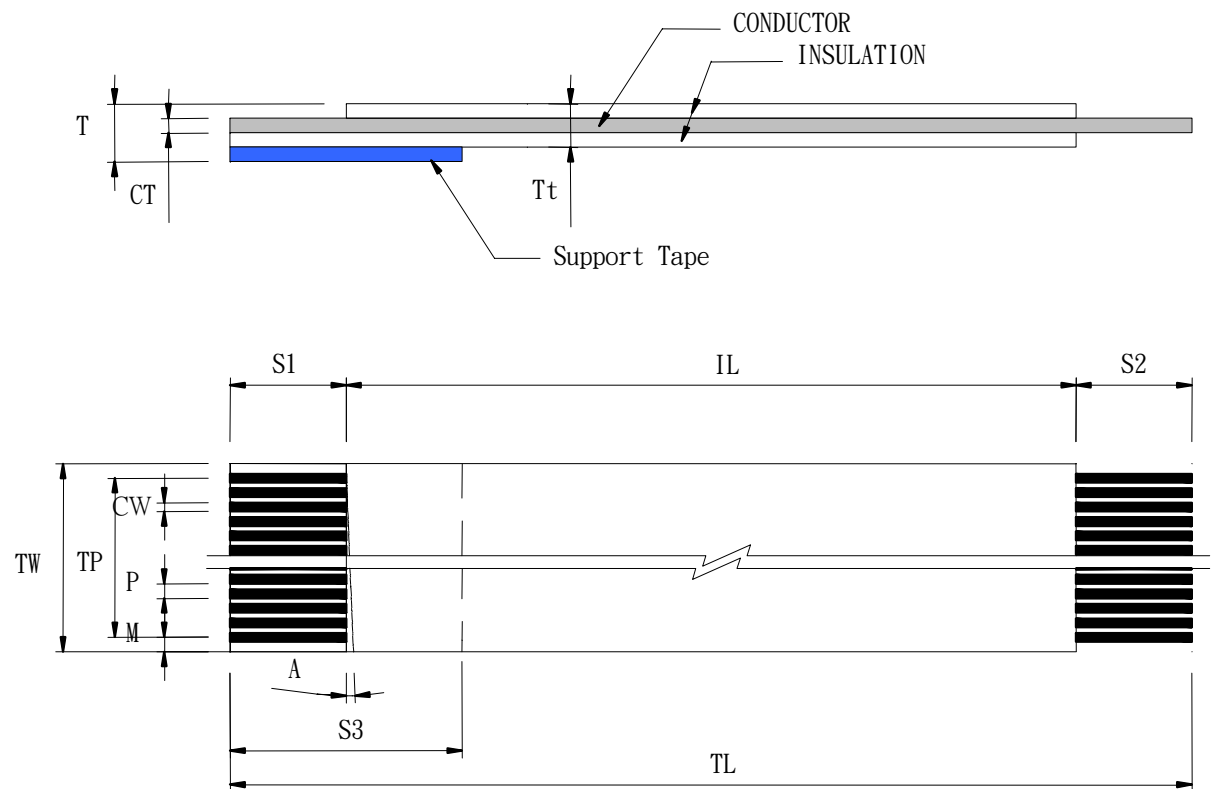

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPB-CC28-100-LF
SERIES | 100mm | LEADFREE
28WAY
C TYPE
CABLE

DESCRIPTION: