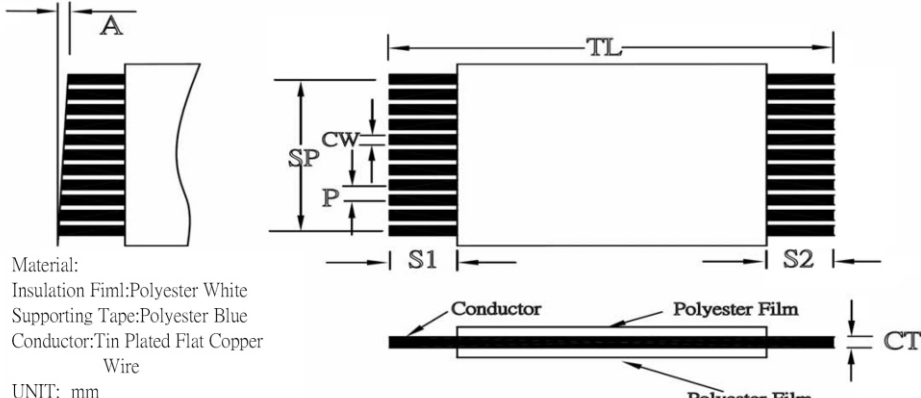





	1	2	3	4	5	6	7	8	9	0																																																												
J																																																																						
I																																																																						
H																																																																						
G																																																																						
F	 Material: Insulation Film: Polyester White Supporting Tape: Polyester Blue Conductor: Tin Plated Flat Copper Wire UNIT: mm <table><tr><td>SYMBOL</td><td>P</td><td>W</td><td>SP</td><td>M</td><td>A</td><td>TL</td><td>T</td><td>S1</td><td>S2</td><td></td><td></td></tr><tr><td>RANGE</td><td>1.25</td><td>12.5</td><td>10.0</td><td>1.25</td><td>0.0</td><td>34.6</td><td></td><td>2.3</td><td>2.3</td><td></td><td></td></tr><tr><td>TOLERANCE</td><td>±0.08</td><td>±0.15</td><td>±0.1</td><td>±0.15</td><td><0.5</td><td>±1.5</td><td></td><td>-0.3 +0.5</td><td>-0.3 +0.5</td><td></td><td></td></tr><tr><td colspan="2">CONDUCTOR</td><td colspan="3">TIN PLATED COPPER WIRE</td><td colspan="3">THICKNESS(Ct)</td><td colspan="2">0.1</td><td colspan="2">±0.005</td></tr><tr><td colspan="2">SPECIFICATION</td><td colspan="3">(TIN 1um以上)</td><td colspan="3">EIDTH(Cw)</td><td colspan="2">0.8</td><td colspan="2">±0.03</td></tr></table>										SYMBOL	P	W	SP	M	A	TL	T	S1	S2			RANGE	1.25	12.5	10.0	1.25	0.0	34.6		2.3	2.3			TOLERANCE	±0.08	±0.15	±0.1	±0.15	<0.5	±1.5		-0.3 +0.5	-0.3 +0.5			CONDUCTOR		TIN PLATED COPPER WIRE			THICKNESS(Ct)			0.1		±0.005		SPECIFICATION		(TIN 1um以上)			EIDTH(Cw)			0.8		±0.03	
SYMBOL	P	W	SP	M	A	TL	T	S1	S2																																																													
RANGE	1.25	12.5	10.0	1.25	0.0	34.6		2.3	2.3																																																													
TOLERANCE	±0.08	±0.15	±0.1	±0.15	<0.5	±1.5		-0.3 +0.5	-0.3 +0.5																																																													
CONDUCTOR		TIN PLATED COPPER WIRE			THICKNESS(Ct)			0.1		±0.005																																																												
SPECIFICATION		(TIN 1um以上)			EIDTH(Cw)			0.8		±0.03																																																												
E																																																																						
D																																																																						
C	FPB-CD09-035-LF LEADFREE RoHS Compliant																																																																					
B																																																																						
A	 煜倫股份有限公司 <table><tr><td colspan="2">PART NO. FPB-CD09-035</td><td colspan="2">CHECKED BY CY</td><td colspan="2" rowspan="2">TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± 0.05 AWG</td><td colspan="2" rowspan="2">DESCRIP TION:</td></tr><tr><td colspan="2">DWG NO. FPB-CD09-035</td><td colspan="2">DRAWING BY</td></tr><tr><td colspan="2">FILE NO.</td><td colspan="2">PROJECTION </td><td colspan="2">AREA</td><td colspan="2">REVISIONS</td><td colspan="2">HK</td><td colspan="2">DATE</td></tr></table>										PART NO. FPB-CD09-035		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± 0.05 AWG		DESCRIP TION:		DWG NO. FPB-CD09-035		DRAWING BY		FILE NO.		PROJECTION 		AREA		REVISIONS		HK		DATE																																					
PART NO. FPB-CD09-035		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± 0.05 AWG		DESCRIP TION:																																																																
DWG NO. FPB-CD09-035		DRAWING BY																																																																				
FILE NO.		PROJECTION 		AREA		REVISIONS		HK		DATE																																																												