




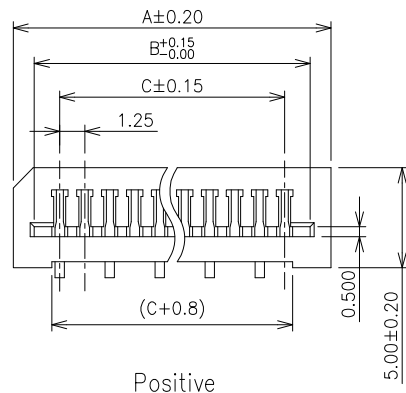

Positive

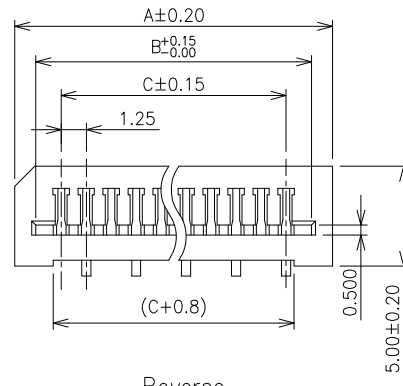

Reverse



NOTE:

■ MATERIAL

HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.
CONTACT: COPPER ALLOY.
PLATING: TIN PLATED OVER NICKEL.

■ ELECTRICAL


CURRENT RATING: 1.0AMP.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
INSULATION RESISTANCE: 500MΩ MIN.
CONTACT RESISTANCE: 30mΩ MAX.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -25°C TO 85°C.


■ DIMENSION TABLE

No. of contacts	Dimensions			No. of contacts	Dimensions		
	接脚位置	A	B		接脚位置	A	B
2		5.90	3.80	20	●	28.40	26.30
3	●	7.15	5.05	21	●	29.65	27.55
4	●	8.40	6.30	22	●	30.90	28.80
5	●	9.65	7.55	23		32.15	30.05
6	●	10.90	8.80	24	●	33.40	31.30
7	●	12.15	10.05	25		34.65	32.55
8	●	13.40	11.30	26		35.90	33.80
9	●	14.65	12.55	27	●	37.15	35.05
10	●	15.90	13.80	28	●	38.40	36.30
11	●	17.15	15.05	29		39.65	37.55
12	●	18.40	16.30	30	●	40.90	38.80
13	●	19.65	17.55	31		42.15	40.05
14	●	20.90	18.80	32		43.40	41.30
15	●	22.15	20.05	33		44.65	42.55
16	●	23.40	21.30	34		45.90	43.80
17	●	24.65	22.55	35		47.15	45.05
18	●	25.90	23.80	36		48.40	46.30
19	●	27.15	25.05	22.50			

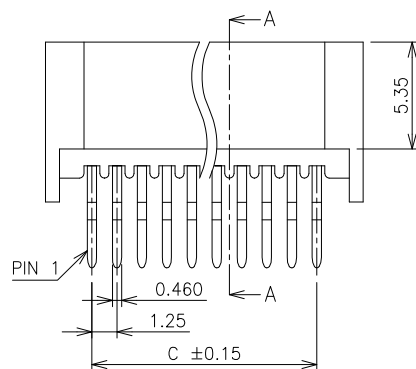


RECOMMENDED PCB LAYOUT

L 正腳位 Positive



RECOMMENDED PCB LAYOUT

R 錯腳位 Reverse



照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

ORDER INFORMATION

FPB-DLAX-xx-LF
SERIES
LEADFREE
03~30WAY
L:L TYPE FOOT
R:R TYPE FOOT
DIP 180°
SINGLE CONTACT
NON ZIF

DESCRIPTION: 1.25PH 8.0H 無蓋斜角直插單接正反腳