
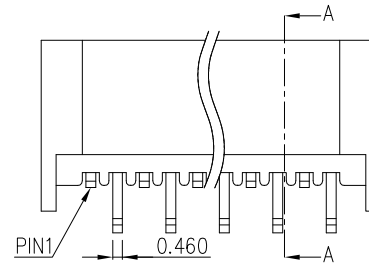


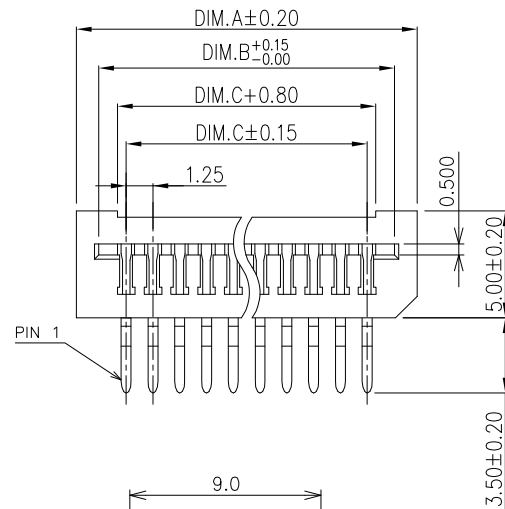


RECOMMENDED PCB LAYOUT

SPEC :

1. Housing :High-Temp Plastic,UL94-V
Color :Black(PBT)
2. Contact :Phosphor Bronze(C5191)
3. Rated Voltage (Maximum) : 200V AC/DC
4. Rated Current (Maximum) : 1.0A AC/DC
5. Ambient Temperature Range : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

No. of contacts	Dimensions			No. of contacts	Dimensions		
	A	B	C		A	B	C
2	5.90	3.80	1.25	19	27.15	25.05	22.50
3	7.15	5.05	2.50	20	28.40	26.30	23.75
4	8.40	6.30	3.75	21	29.65	27.55	25.00
5	9.65	7.55	5.00	22	30.90	28.80	26.25
6	10.90	8.80	6.25	23	32.15	30.05	27.50
7	12.15	10.05	7.50	24	33.40	31.30	28.75
8	13.40	11.30	8.75	25	34.65	32.55	30.00
9	14.65	12.55	10.00	26	35.90	33.80	31.25
10	15.90	13.80	11.25	27	37.15	35.05	32.50
11	17.15	15.05	12.50	28	38.40	36.30	33.75
12	18.40	16.30	13.75	29	39.65	37.55	35.00
13	19.65	17.55	15.00	30	40.90	38.80	36.25
14	20.90	18.80	16.25	31	42.15	40.05	37.50
15	22.15	20.05	17.50	32	43.40	41.30	38.75
16	23.40	21.30	18.75	33	44.65	42.55	40.00
17	24.65	22.55	20.00	34	45.90	43.80	41.25
18	25.90	23.80	21.25	35	47.15	45.05	42.50
				36	48.40	46.30	43.75

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

FPB-RLBL-xx-LF
SERIES
LEADFREE
02~36WAY
L TYPE FOOT
BOTTOM CONTACT
NON ZIF
DIP 90°

DESCRIPTION: 1.25PH 5.0H 無蓋斜角彎插 下接正腳位