


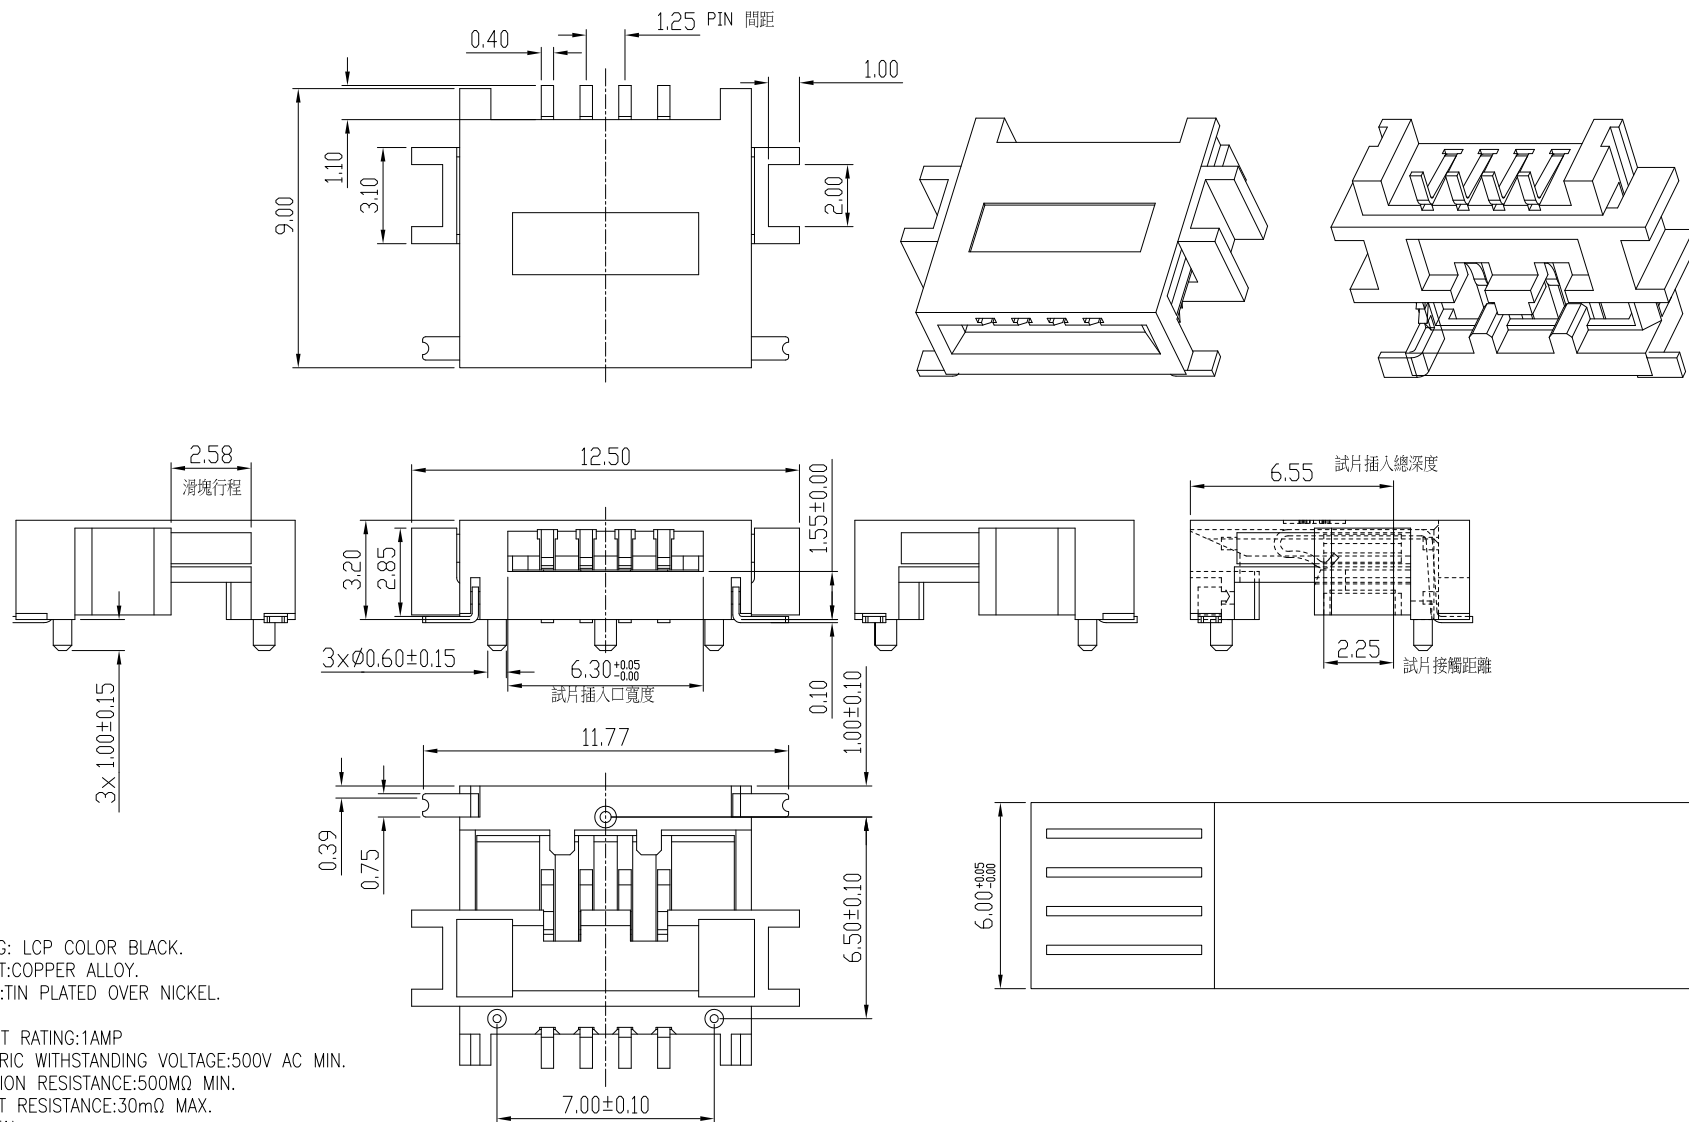

NOTES:

1. MATERIAL:

- 1.1 HOUSING: LCP COLOR BLACK.
- 1.2 CONTACT: COPPER ALLOY.
- 1.3 PLATING: TIN PLATED OVER NICKEL.

2. ELECTRICAL

- 2.1 CURRENT RATING: 1AMP
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
- 2.3 INSULATION RESISTANCE: 500MΩ MIN.
- 2.4 CONTACT RESISTANCE: 30mΩ MAX.

3. ENVIRONMENTAL

- 3.1 TEMPERATURE RANGE: -25°C TO +85°C.
- 3.2 Soldering recommendation: hand soldering

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPB-WLA33P-04-LF
SERIES POST HIGH 3.3mm SINGLE CONTACT
90°SMT NON ZIF
LEADFREE
04 WAY

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com