

■ MATERIAL


INSULATOR: HIGH TEMPERATURE THERMOPLASTIC UL94V-0
 CINTACT: PHOSPHOR BRONZE.
 PLATING:MATING AREA 15u GOLD SOLED AREA TIN/LEAD

■ SPECIFICATION

VOLTAGE RATING: 250 VAC RMS.
 CURRENT RATING: 1 AMP.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC RMS 60 Hz.
 FOR 1 MINUTE.
 INSULATION RESISTANCE: 5000 MEGAHMS MIN AT 500 VDC.
 CONTACT RESISTANCE: 25 MILLIOHMS MAX.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO +105°C

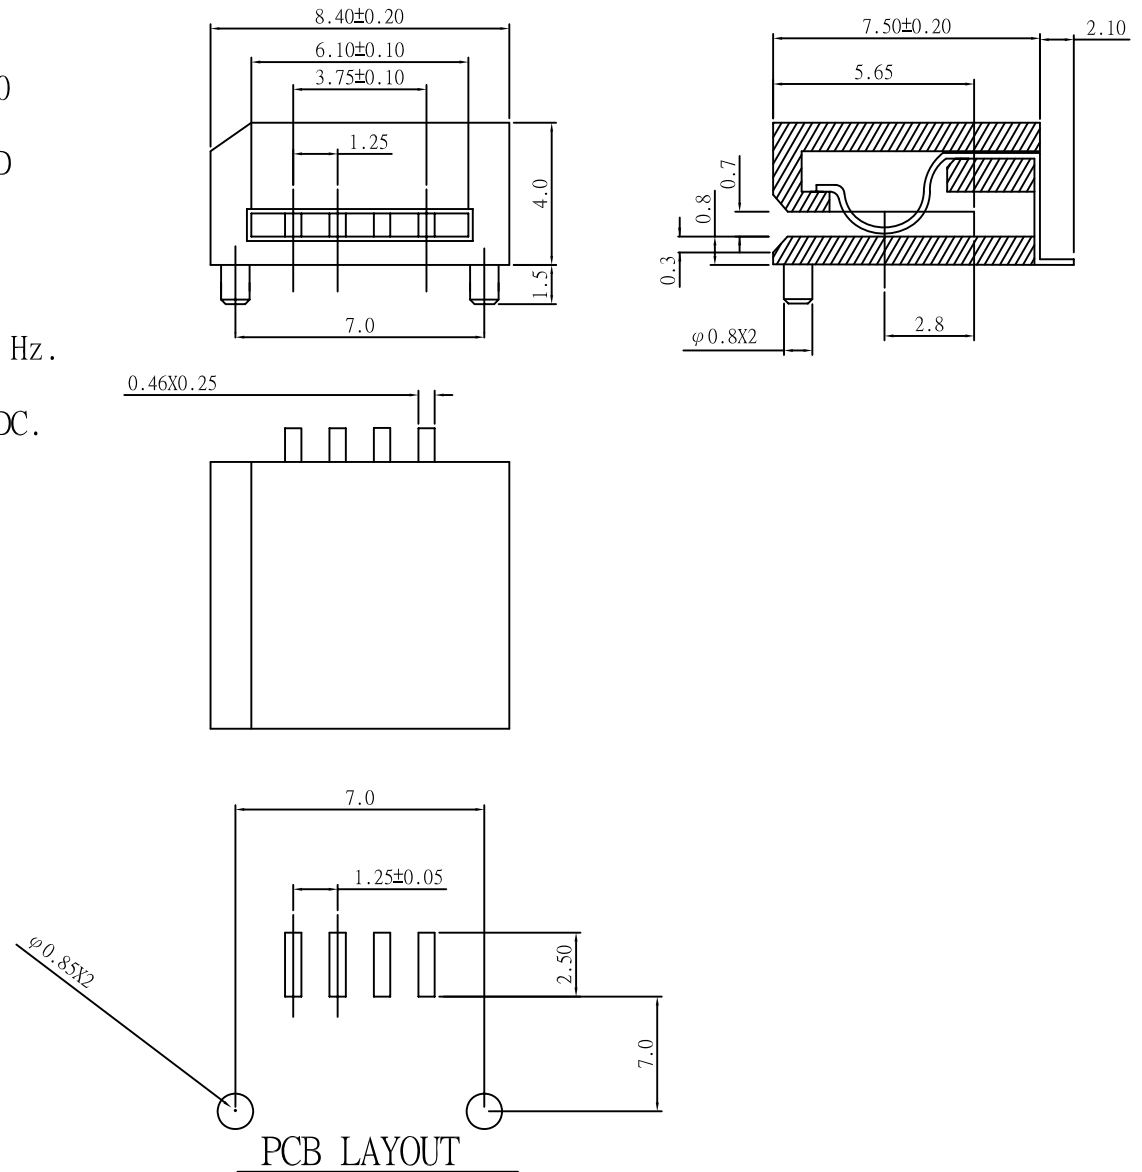

PCB LAYOUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPB-WLA40P-04-LF
 SERIES POST HIGH 4.0mm SINGLE CONTACT NON ZIF
 90°SMT
 04 WAY LEADFREE

DESCRIPTION: FPC/FFC 1.25 PITCH SMD TYPE