


TOLERANCE:

Abbr.	TOLERANCE				
	P=0.5	P=0.8	P=1.0	P=1.25	P=2.54
P	±0.05	±0.08	±0.08	±0.10	±0.15
Pt	±0.08	±0.10	±0.10	±0.15	±0.20
W	±0.08	±0.10	±0.10	±0.20	±0.20
M	±0.08	±0.12	±0.12	±0.15	±0.20
Cw	±0.02	±0.03	±0.03	±0.03	±0.04
L	(30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm				

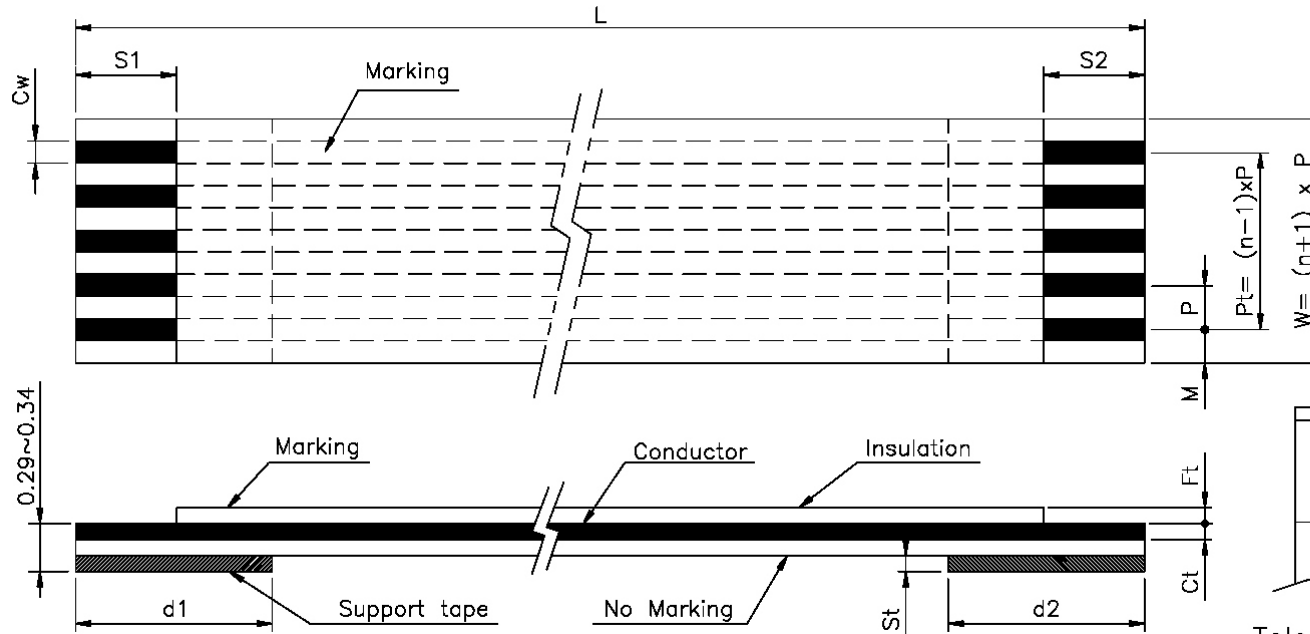

Tolerance of Cutting Tilt

	Dimension
Ft±0.01	0.043
St±0.01	0.225

RoHS Compliant

UL Style : 20706

Customer P/N	MORETHANALL P/N	No. of Conductor	Dimension											Support Tape Color
			P	Pt	L	W	M	Cw	Ct±0.01	S1±1.0	S2±1.0	d1±2.0	d2±2.0	
	FPE-CA32-025	32	0.8	24.8	25	26.4	0.8	0.5	0.05	4	4	8	8	BLUE

FPE-CA32-025-LF
LEADFREE

PART NO. FPE-CA32-025

DWG NO. FPE-CA32-025

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ± 0.1

.XXX ±

AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司