


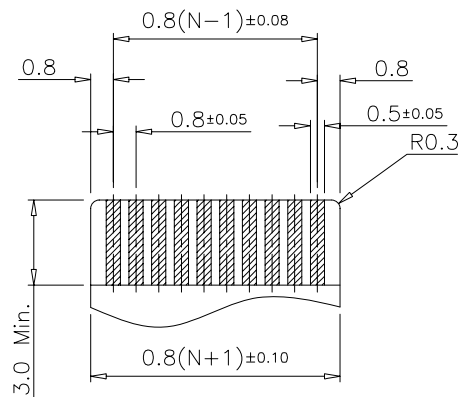
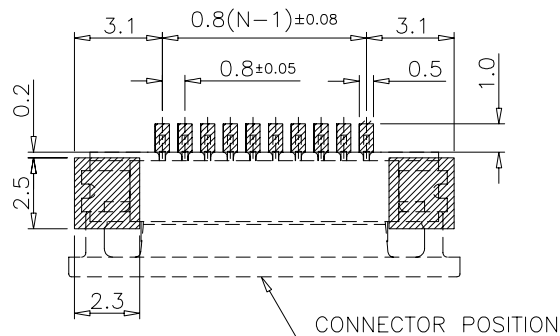
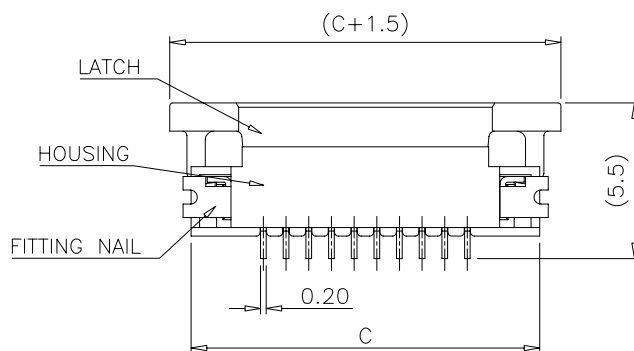


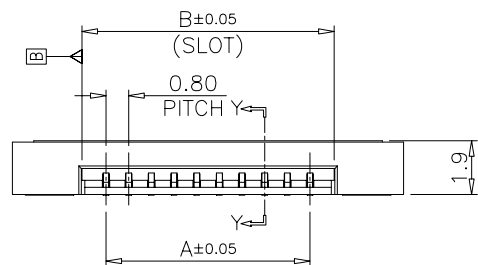

RECOMMENDED APPLICABLE FPC LAYOUT
(THICKNESS:0.3±0.03)



PCB PATTERN LAYOUT



NOTES:

1.MATERIAL:

HOUSING:NYLON UL94V-0

LATCH:PPS UL94V-0

TERMINAL:COPPER ALLOY

FITTING NAIL:COPPER ALLOY

2.COPLANARITY 0.1 MM MAX. BASE ON DATUM A

3.TRUE POSITION 0.1 MM MAX. BASE ON DATUM B

CKT	Dim A	Dim B	Dim C	CKT	Dim A	Dim B	Dim C
4	2.4	4.1	7.5	23	17.6	19.3	22.7
5	3.2	4.9	8.3	24	18.4	20.1	23.5
6	4.0	5.7	9.1	25	19.2	20.9	24.3
7	4.8	6.5	9.9	26	20.0	21.7	25.1
8	5.6	7.3	10.7	27	20.8	22.5	25.9
9	6.4	8.1	11.5	28	21.6	23.3	26.7
10	7.2	8.9	12.3	29	22.4	24.1	27.5
11	8.0	9.7	13.1	30	23.2	24.9	28.3
12	8.8	10.5	13.9	31	24.0	25.7	29.1
13	9.6	11.3	14.7	32	24.8	26.5	29.9
14	10.4	12.1	15.5	33	25.6	27.3	30.7
15	11.2	12.9	16.3	34	26.4	28.1	31.5
16	12.0	13.7	17.1	35	27.2	28.9	32.3
17	12.8	14.5	17.9	36	28.0	29.7	33.1
18	13.6	15.3	18.7	37	28.8	30.5	33.9
19	14.4	16.1	19.5	38	29.6	31.3	34.7
20	15.2	16.9	20.3	39	30.4	32.1	35.5
21	16.0	17.7	21.1	40	31.2	32.9	36.3
22	16.8	18.5	21.9				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION




X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION


FPE-WZB19R-xx-LF
SERIES | | | | LEADFREE
04~34WAY
REEL
HIGH 1.9mm
90°SMT | | | | BOTTOM CONTACT
ZIF

DESCRIPTION: 0.8mm ZIF FPC CONN. SMT R/A TOP CONTACT

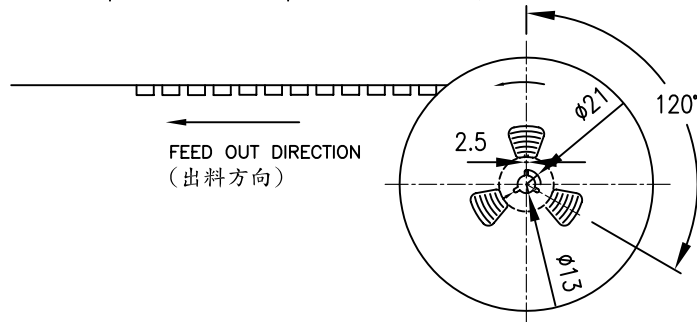

12		14.80		
11		14.00		
10		13.20		
9		12.40		
8	11.50	11.60	24.00	24.40
7		10.80		
6		10.00		
5		9.20		
4		8.40		
CKT	A	B±0.10	C	D
	DIM			

1. Thickness : 0.35±0.05mm.
2. Packing length per 22" reel : 75.0 Meters.
3. Component load per 13" reel : 2000 pcs.

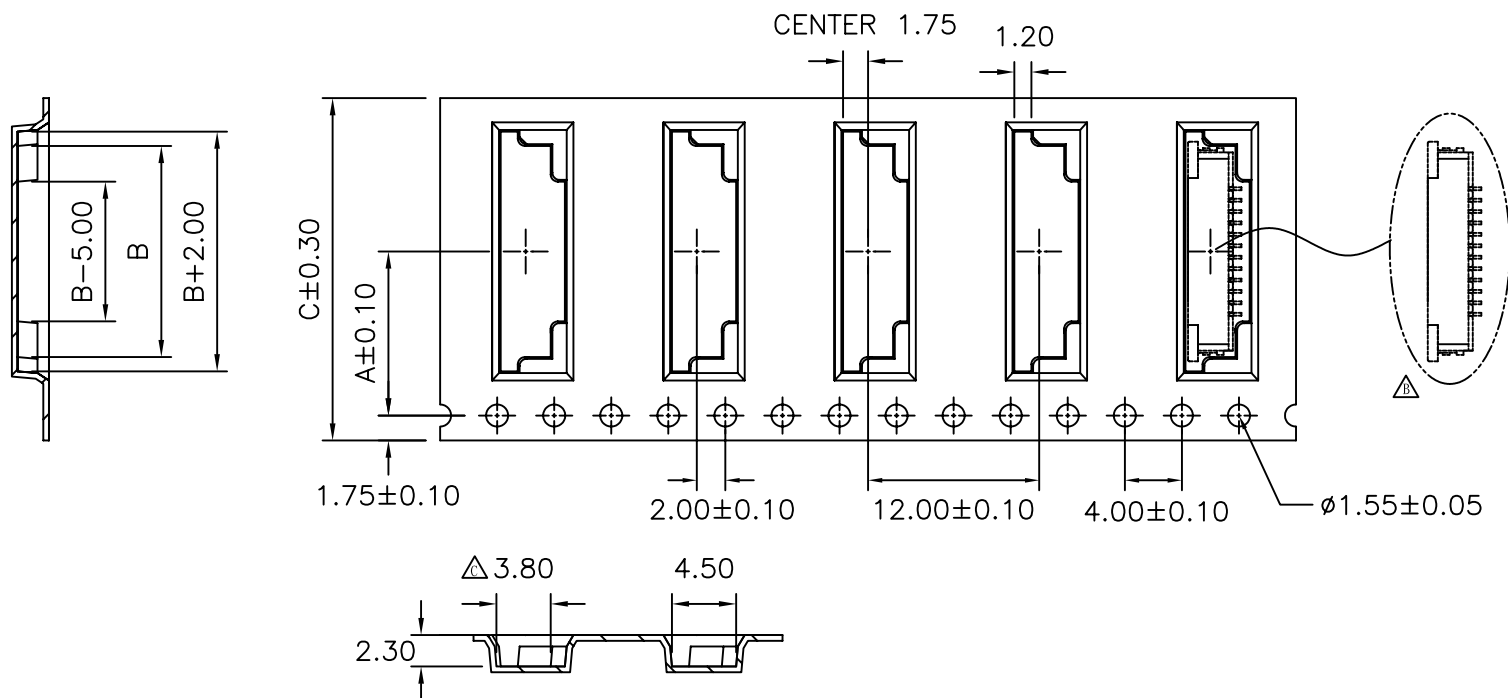

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

FPE-WZB19R-xx-LF
 SERIES | | | | LEADFREE
 | | | | 04~34WAY
 | | | | REEL
 | | | | HIGH 1.9mm
 90°SMT | | | | BOTTOM CONTACT
 ZIF

DESCRIPTION: EMBOSSED TAPE PACKING

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

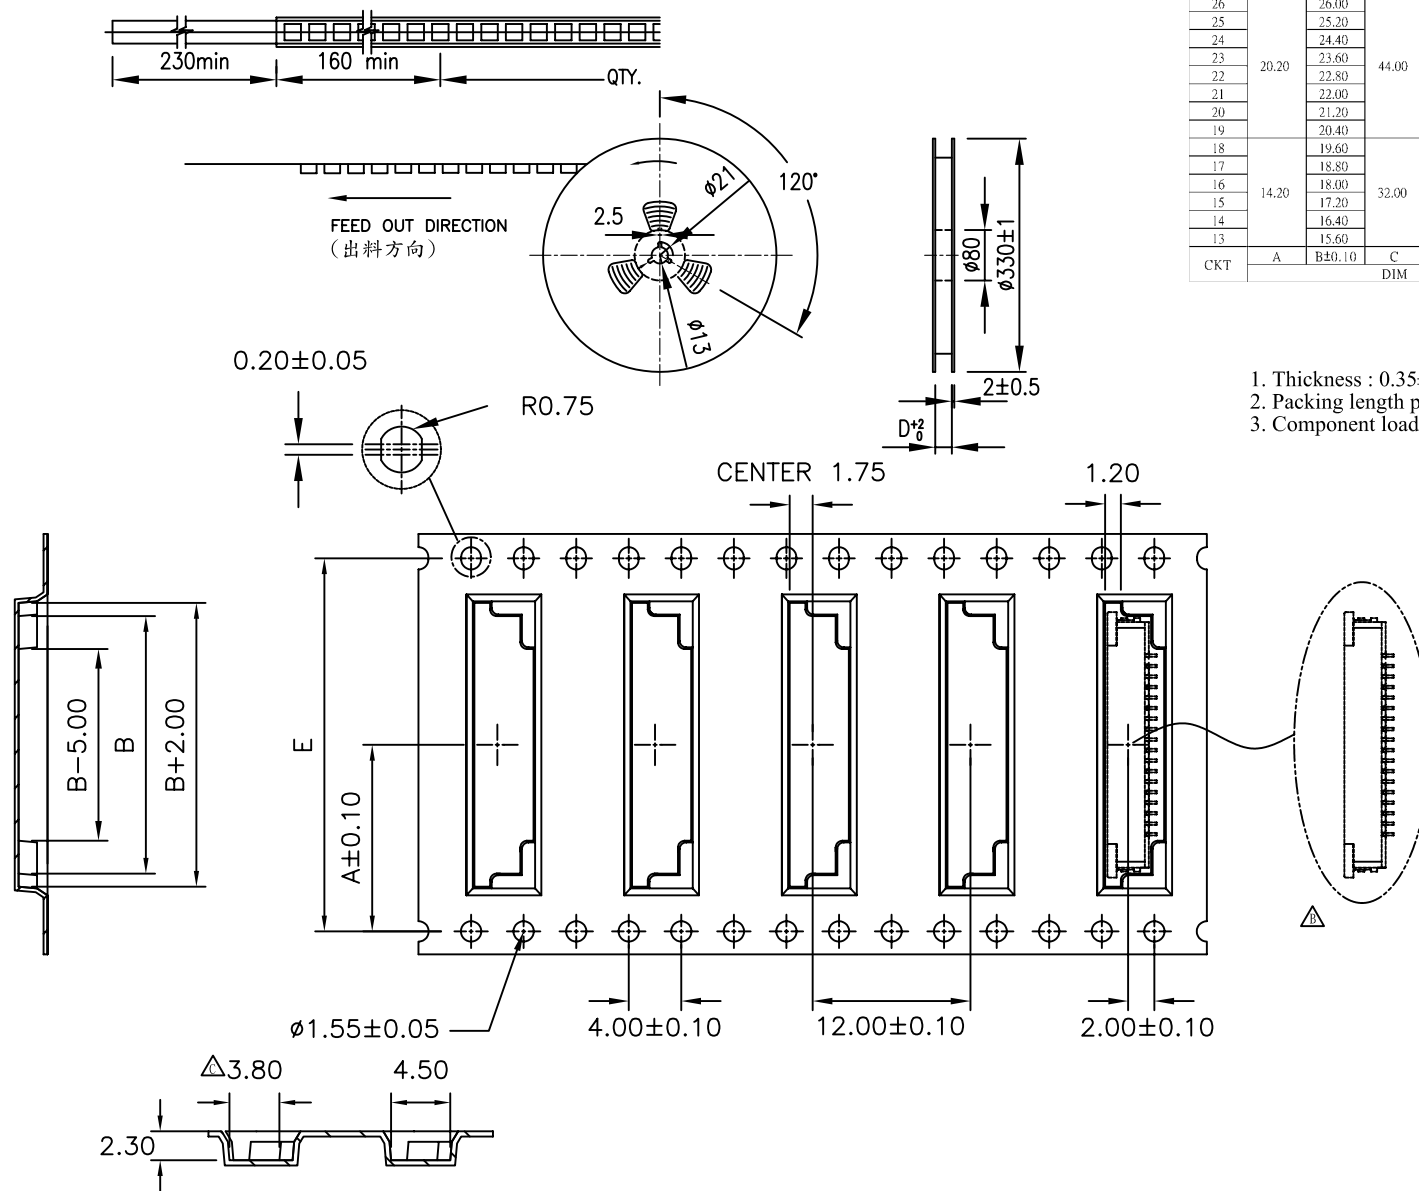

26		26.00				40		37.20			
25		25.20				39		36.40			
24		24.40				38		35.60			
23	20.20	23.60	44.00	44.40	40.40	37	26.20	34.80	56.00	56.40	52.40
22		22.80				36		34.00			
21		22.00				35		33.20			
20		21.20				34		32.40			
19		20.40				33		31.60			
18		19.60				32		30.80			
17		18.80				31		30.00			
16	14.20	18.00	32.00	32.40	28.40	30	20.20	29.20	44.00	44.40	40.40
15		17.20				29		28.40			
14		16.40				28		27.60			
13		15.60				27		26.80			
CKT	A	B±0.10	C	D	E	CKT	A	B±0.10	C	D	E
DIM											

1. Thickness : 0.35±0.05mm.
2. Packing length per 22" reel : 75.0 Meters.
3. Component load per 13" reel : 2000 pcs.

照片框

RoHS Compliant

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

ORDER INFORMATION

FPE-WZB19R-xx-LF
SERIES REEL HIGH 1.9mm
90°SMT ZIF BOTTOM CONTACT
LEADFREE 04~34WAY

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com