

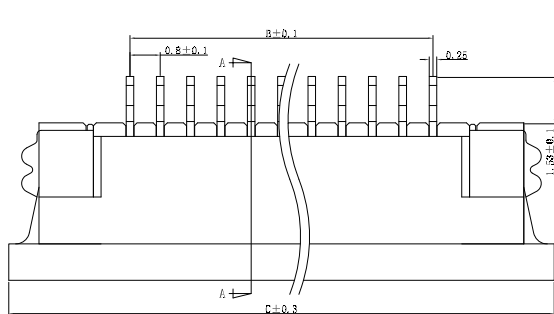
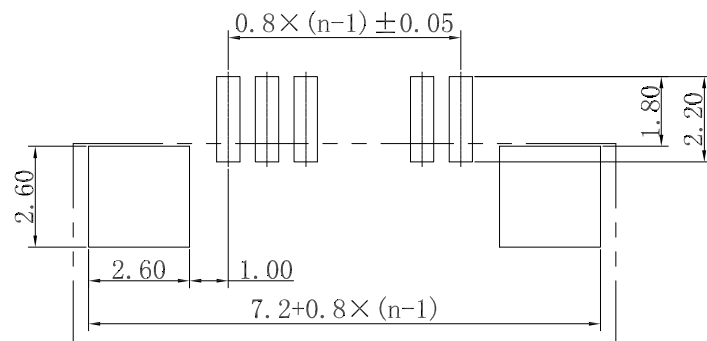


SPEC :

1. Housing: High-Temp Plastic, UL94V-0
Color: Nature (Lvy) (LCP)
2. Locker: High-Temp Plastic, UL94V-0
Color: Black (LCP)
3. Contact: Phosphor Bronze (C5191)
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
4. Solder Tab: BRASS (C2680)
5. Temperature Rating : -25°C ~ +85°C
6. Dielectric Withstanding Voltage : 500V AC/Min

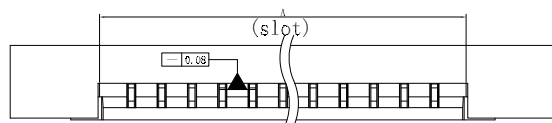

PC BOARD LAYOUT

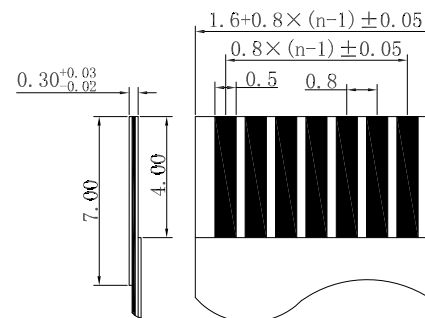

NO. of Contacts (n)	Dimensions		
	A	B	C
04	4.1	2.4	9.95
05	4.9	3.2	10.75
06	5.7	4.0	11.55
07	6.5	4.8	12.35
08	7.3	5.6	13.15
09	8.1	6.4	13.95
10	8.9	7.2	14.75
11	9.7	8.0	15.55
12	10.5	8.8	16.35
13	11.3	9.6	17.15
14	12.1	10.4	17.95
15	12.9	11.2	18.75
16	13.7	12.0	19.55
17	14.5	12.8	20.35
18	15.3	13.6	21.15
19	16.1	14.4	21.95
20	16.9	15.2	22.75
21	17.7	16.0	23.55
22	18.5	16.8	24.35
23	19.3	17.6	25.15
24	20.1	18.4	25.95
25	20.9	19.2	26.75
26	21.7	20.0	27.55
27	22.5	20.8	28.35
28	23.3	21.6	29.15
29	24.1	22.4	29.95
30	24.9	23.2	30.75
31	25.7	24.0	31.55
32	26.5	24.8	32.35
33	27.3	25.6	33.15
34	28.1	26.4	33.95
35	28.9	27.2	34.75
36	29.7	28.0	35.55
37	30.5	28.8	36.35
38	31.3	29.6	37.15

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPE-WZB25-xx-LF

SERIES
LEADFREE
04~38WAY
HIGH 2.46mm
BOTTOM CONTACT
ZIF
90°SMT

DESCRIPTION: 0.8PH 2.5H 抽屜臥貼下插