


UL Style No : UL2643 / 105 ° C, 300V
UL Marking on one side

Conductor : Tin Plated Copper Conductor
Thickness(Ct): 0.10±0.01mm
Width(Cw): 0.08±0.03mm
Tin plating thickness:1~3 μ

Insulation : Polyester (PET) film+adhesive
PET film thickness: 0.035mm
PET adhesive thickness: 0.025mm

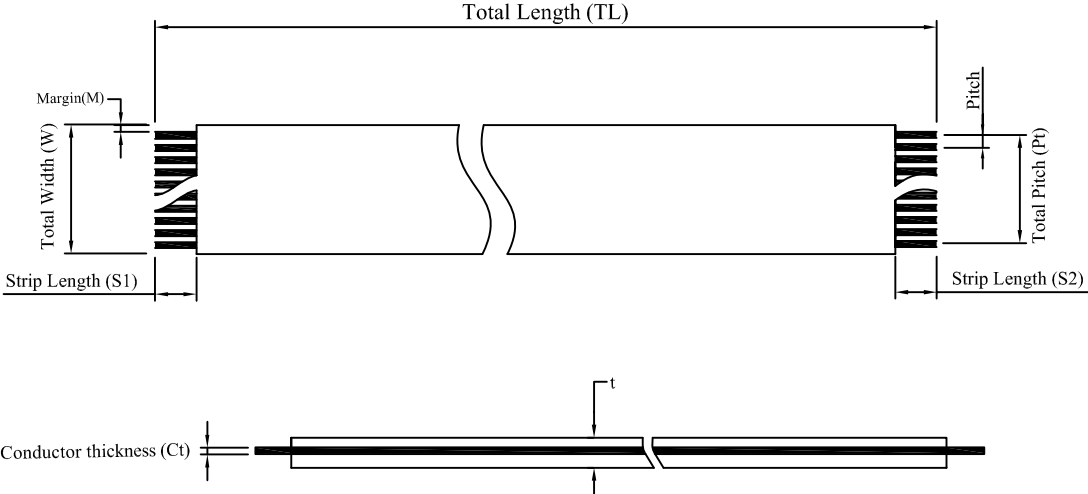

Characteristics	Method	Spec
Conductor Resistance	JIS C-3102	Less than 0.26 Ω/m
Insulation Resistance	DC 500V after 1 min	More than 1,000 MΩ/m
Dielectric Strength		2500V / MIL
Current Rating		Maximum 3A
Heat Resistance	85°C, 96hrs	Insulation resistance and Dielectric strength pass
Heat Cycle Test	-40°C→+25°C→+85°C→+25°C *12hrs*2cycles	Insulation resistance and Dielectric strength pass
Moisture Resistance	40°C, 95%RH, 96hr	Insulation resistance and Dielectric strength pass
Flame Test	UL VW-1	Pass
Flexing Test	10mmR*10cm*10 cycles/min	More than 30,000 cycles
Bending Test(180°) (clip the point of supporting tape)	±90°C, 60g, 0.5mmR	More than 10 cycles
Abrasion Test	5mm Ø 600g , 60 cycles/min	More than 10,000 cycles

SYMBOL	Pitch	PIN	TYPE	TL	Pt	W	M	T	t	S1	S2	S3	S4
RANGE	1.27	32	A	32	39.37	41.91	1.23		0.22	3	3		
TOLERANCE	±0.1	ditto	ditto	±2.0	±0.15	±0.2	±0.2		±0.03	±0.8	±0.8		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPH-CD32-032-LF

SERIES

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

LEADFREE

32mm

DOUBLE STRIP

CABLE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: