


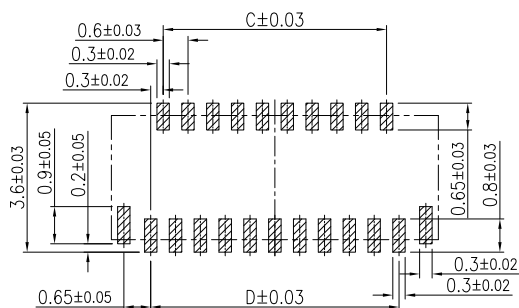
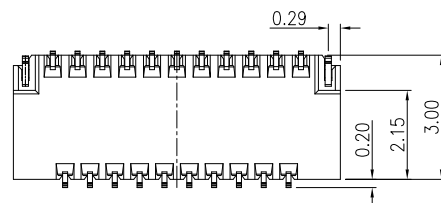
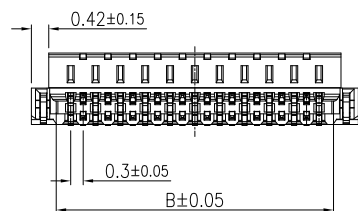
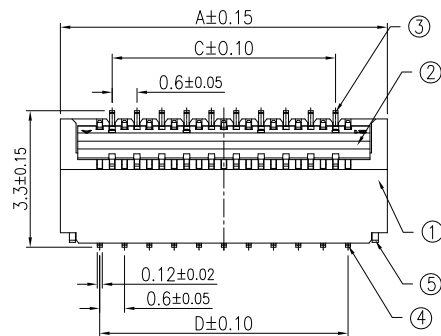





Recommended P.C.B Layout

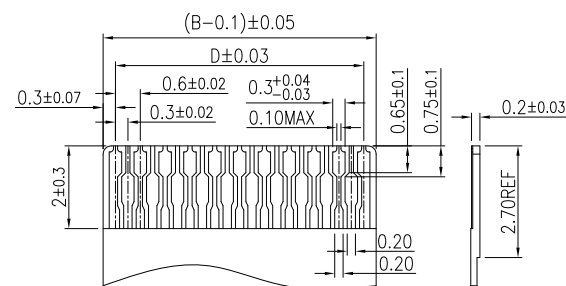

SCALE=2/1



Applicable FPC

SPEC :

1. Housing: Hight-Temp Plastic, UL94-V
Color: Nature(Lvory)(LCP)
2. Locker: Hight-Temp Plastic, UL94-V
Color: Black(PA9T)
3. Contact: Phosphor Bronze(C5191)
4. Solder Tab: BRASS(C2680)

No. of contacts	現有p數	Dimensions			
		A	B	C	D
9	●	4.30	3.10	1.80	2.40
11	●	4.90	3.70	2.40	3.00
13	●	5.50	4.30	3.00	3.60
15	●	6.10	4.90	3.60	4.20
21	●	7.90	6.70	5.40	6.00
23	●	8.50	7.30	6.00	6.60
25	●	9.10	7.90	6.60	7.20
29	●	10.30	9.10	7.80	8.40
31	●	10.90	9.70	8.40	9.00
33	●	11.50	10.30	9.00	9.60
35	●	12.10	10.90	9.60	10.20
39	●	13.30	12.10	10.80	11.40
41	●	13.90	12.70	11.40	12.00
45	●	15.10	13.90	12.60	13.20
51	●	16.90	15.70	14.40	15.00
61	●	19.90	18.70	17.40	18.00
71	●	22.90	21.70	20.40	21.00

NO.	COMPONENTS	MATERIALS	COLOR/SPECIFICATION	QUANTITY
1	HOUSING	LCP	NATURAL UL94V-0	1 PCS
2	COVER	PA9T	BLACK UL94V-0	1 PCS
3	CONTACT	PHOSPHOR BRONZE	T=0.12mm PLATING	POSITIONS
4	CONTACT	PHOSPHOR BRONZE	T=0.12mm PLATING	POSITIONS
5	STATOR	BRASS	T=0.15mm PLATING	2 PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

FPT-WHB09-xx-LF
SERIES
LEADFREE
09~71WAY
HIGH 0.9mm
BOTTOM CONTACT
HINGED ZIF
90°SMT

DESCRIPTION: 0.3PH 0.9H 掀蓋臥貼背插鍍金