



SECTION: A-A
3:1

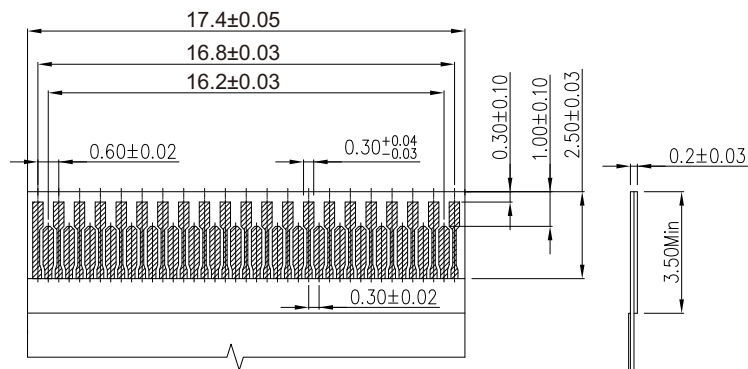

RECOMMENDED FPC DIMENSIONS

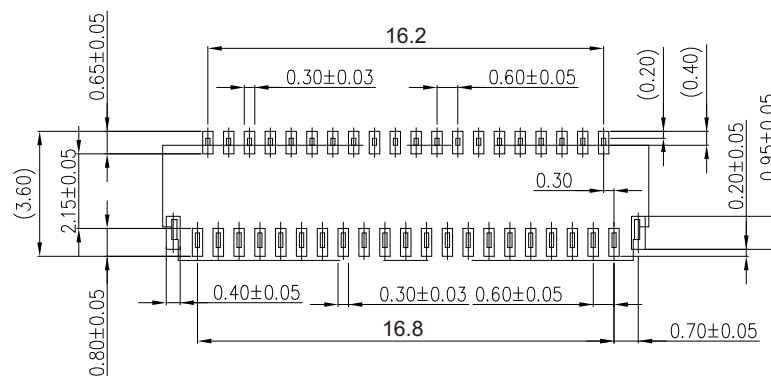

FPC/FFC Insert Direction
Recommended P.C.B Layout

SPEC :

- 1.Housing:High -Temp Plastic,UL94-V
Color:Nature(Ivory)
- 2.Locker:High -Temp Plastic,UL94-V
Color:Black
- 3.Contact:Phosphor Bronze
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
- 4.Solder Tab:BRASS
- 5.Temperature Rating:-55°C~+85°C
- 6.Dielectric Withstanding Voltage:500V AC/Min

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPT-WHB10-57-LF

SERIES

LEADFREE

57 WAY

HIGH 1.0mm

BOTTOM CONTACT

HINGED ZIF

90°SMT

DESCRIPTION: FPC 0.3PH 1.0H 掀蓋臥貼前插