


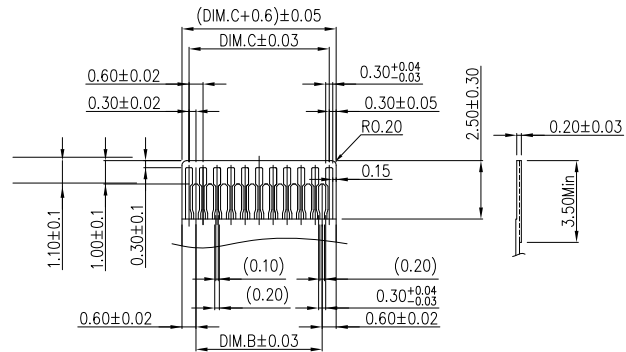
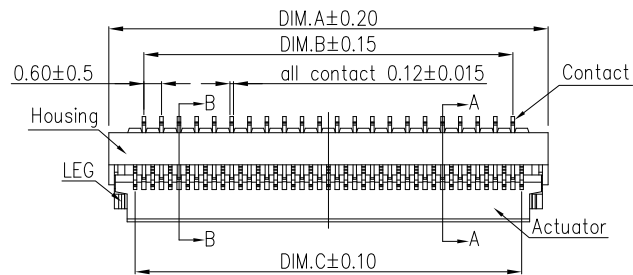
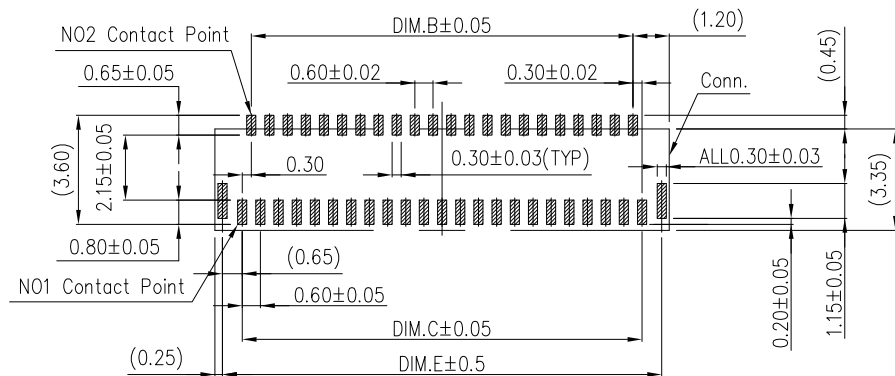


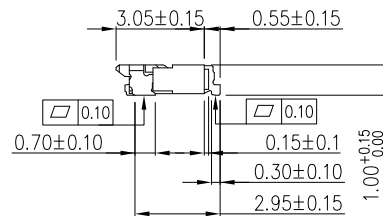

Applicable FPC

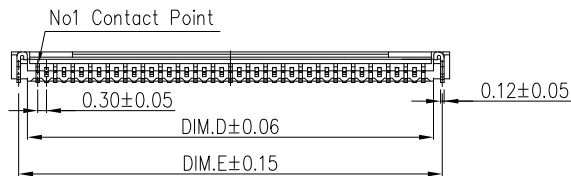

FPC/FFC Insert Direction
Recommended P.C.B Layout



SPEC :

- Housing: High-Temp Plastic, UL94-V
Color: Nature (Ivory) (LCP)
- Locker: High-Temp Plastic, UL94-V
Color: Black (LCP)
- Contact: Phosphor Bronze (C5191)
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
- Solder Tab: BRASS (C2680)
- Temperature Rating : -25°C ~ +85°C
- Dielectric Withstanding Voltage : 500V AC/Min

No. of contacts	A	B	C	D	E	F
9	4.30	3.03	2.40	1.80	3.73	3.00
11	4.90	3.63	3.00	2.40	4.33	3.60
13	5.50	4.23	3.60	3.00	4.93	4.20
15	6.10	4.83	4.20	3.60	5.53	4.80
17	6.70	5.43	4.80	4.20	6.13	5.40
19	7.30	6.03	5.40	4.80	6.73	6.00
21	7.90	6.63	6.00	5.40	7.33	6.60
23	8.50	7.23	6.60	6.00	7.93	7.20
25	9.10	7.83	7.20	6.60	8.53	7.80
27	9.70	8.43	7.80	7.20	9.13	8.40
29	10.30	9.03	8.40	7.80	9.73	9.00
31	10.90	9.63	9.00	8.40	10.33	9.60
33	11.50	10.23	9.60	9.00	10.93	10.20
35	12.10	10.83	10.20	9.60	11.53	10.80
37	12.70	11.43	10.80	10.20	12.13	11.40
39	13.30	12.03	11.40	10.80	12.73	12.00
41	13.90	12.63	12.00	11.40	13.33	12.60
43	14.50	13.23	12.60	12.00	13.93	13.20
45	15.10	13.83	13.20	12.60	14.53	13.80
47	15.70	14.43	13.80	13.20	15.13	14.40
49	16.30	15.03	14.40	13.80	15.73	15.00
51	16.90	15.63	15.00	14.40	16.33	15.60
53	17.50	16.23	15.60	15.00	16.93	16.20
55	18.10	16.83	16.20	15.60	17.53	16.80
57	18.70	17.43	16.80	16.20	18.13	17.40
59	19.30	18.03	17.40	16.80	18.73	18.00
61	19.90	18.63	18.00	17.40	19.33	18.60
63	20.50	19.23	18.60	18.00	19.93	19.20
65	21.10	19.83	19.20	18.60	20.53	19.80
67	21.70	20.43	19.80	19.20	21.13	20.40
69	22.30	21.03	20.40	19.80	21.73	21.00
71	22.90	21.63	21.00	20.40	22.33	21.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

FPT-WHB10-xx-LF

SERIES

LEADFREE

09-71WAY

HIGH 1.0mm

BOTTOM CONTACT

HINGED ZIF

90°SMT

DESCRIPTION: 0.3PH 1.0H 掀蓋臥貼前插鍍金