
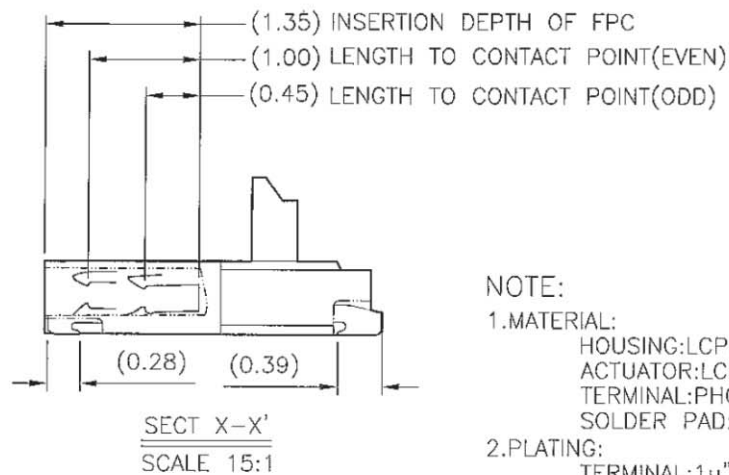


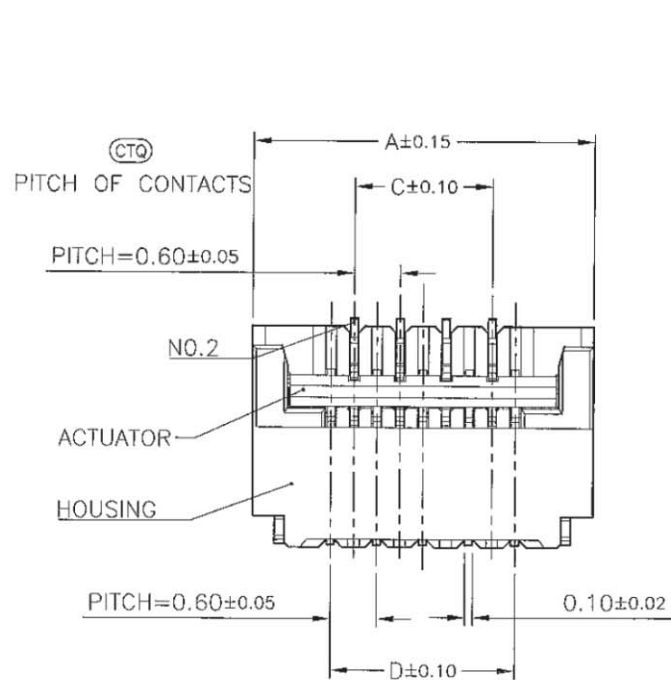

NOTE:

1.MATERIAL:


HOUSING:LCP(UL94V-0)
ACTUATOR:LCP(UL94V-0)
TERMINAL:PHOSPHOR BRONZE
SOLDER PAD:PHOSPHOR BRONZE

2.PLATING:

TERMINAL:1u"~3u" GOLD FLASH(NICKEL BARRIER)
SOLDER PAD:TIN OVER NICKEL(LEAD FREE)

3.RATING:

OPERATING VOLTAGE:50V AC(rms)
CURRENT RATING:0.2A DC
OPERATING TEMPERATURE:-55°C ~ +85°C

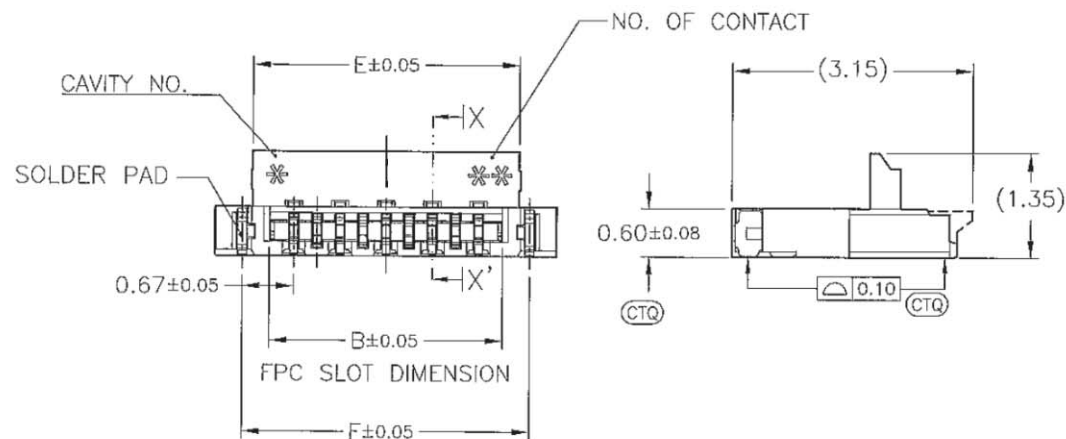

NO.OF CONTACTS	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E	DIM. F
07	3.85	2.43	1.20	1.80	2.87	3.16
09	4.45	3.03	1.80	2.40	3.47	3.76
11	5.05	3.63	2.40	3.00	4.07	4.36

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



照片框

ORDER INFORMATION

FPT-WRD06R-xx-LF
SERIES
90°SMT
LEADFREE
07.09.11 WAY
REEL
HIGH 0.6mm
DUAL CONTACTS
ROTARY ZIF

DESCRIPTION:

RECOMMENDED METAL MASK PATTERN

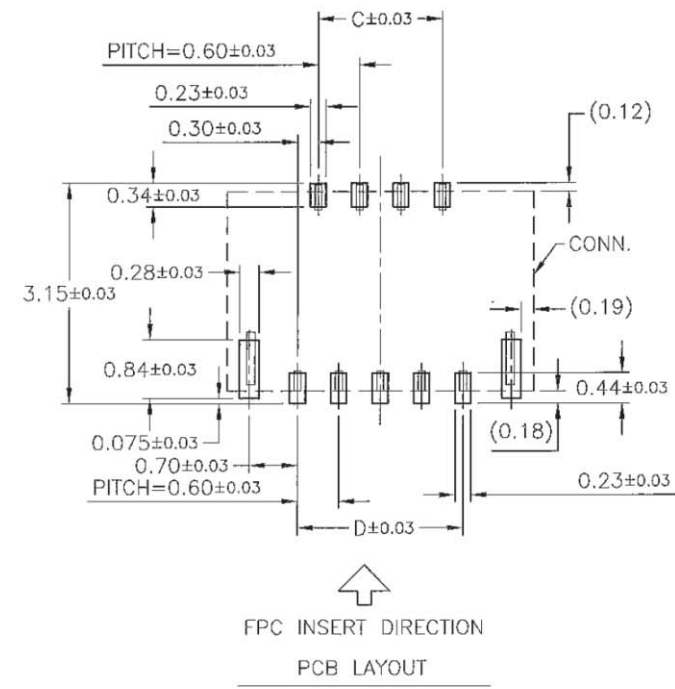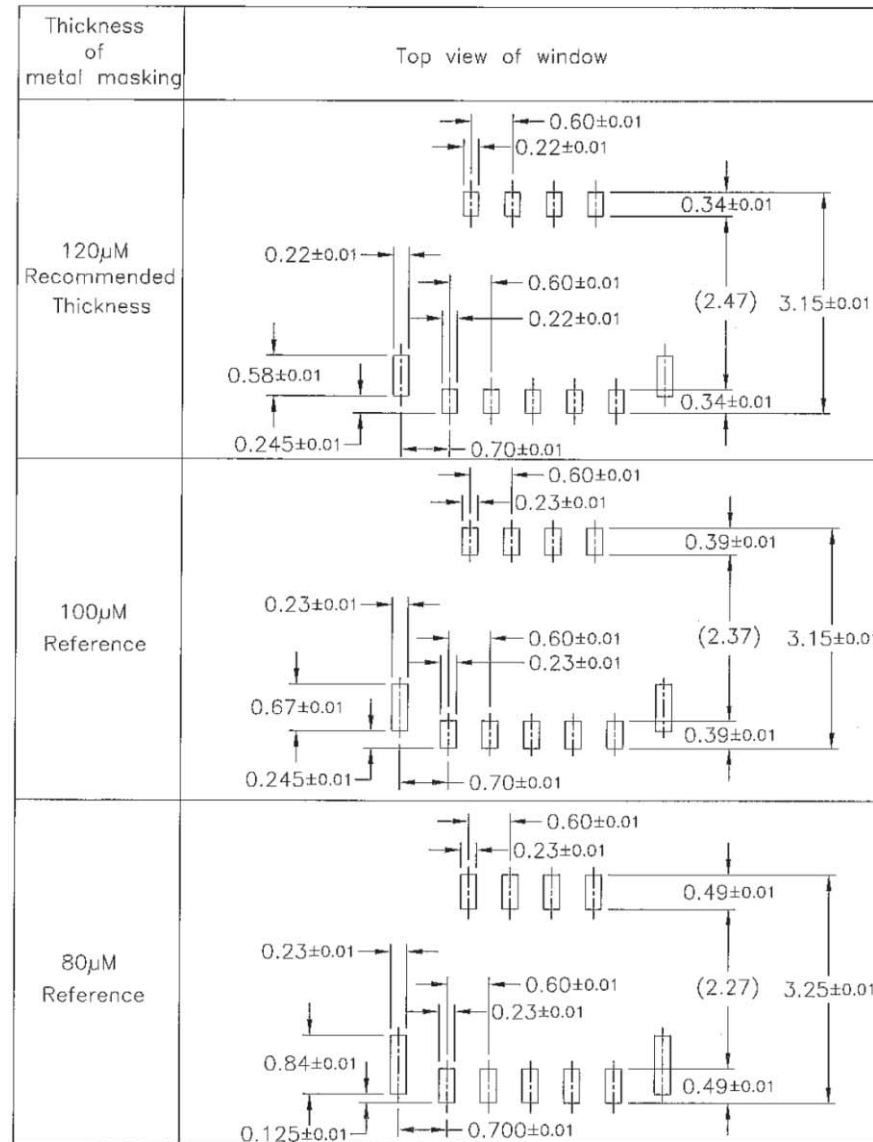

NO. OF CONTACTS	DIM. C	DIM. D
07	1.20	1.80
09	1.80	2.40
11	2.40	3.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±


ANG ±

照片框

ORDER INFORMATION

FPT-WRD06R-xx-LF
SERIES
90°SMT
LEADFREE
07.09.11 WAY
REEL
HIGH 0.6mm
DUAL CONTACTS
ROTARY ZIF

DESCRIPTION:

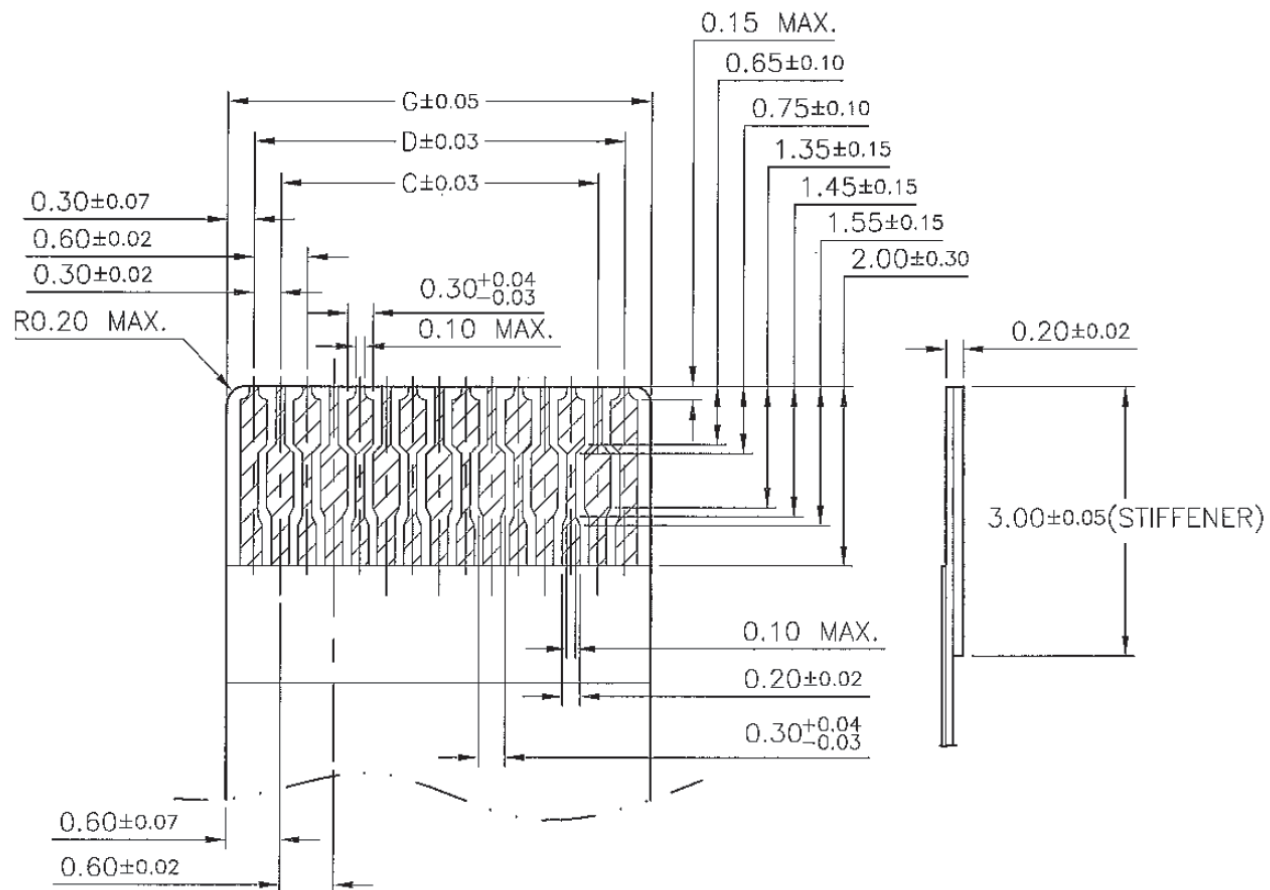

APPLICABLE FPC

ODD CONTACT

NO.OF CONTACTS	DIM. C	DIM. D	DIM. G
07	1.20	1.80	2.40
09	1.80	2.40	3.00
11	2.40	3.00	3.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±

照片框


ORDER INFORMATION

FPT-WRD06R-xx-LF

SERIES
 90°SMT
 REEL
 HIGH 0.6mm
 DUAL CONTACTS
 ROTARY ZIF
 LEADFREE
 07.09.11 WAY

DESCRIPTION:


EMBOSED TAPE PACKAGING

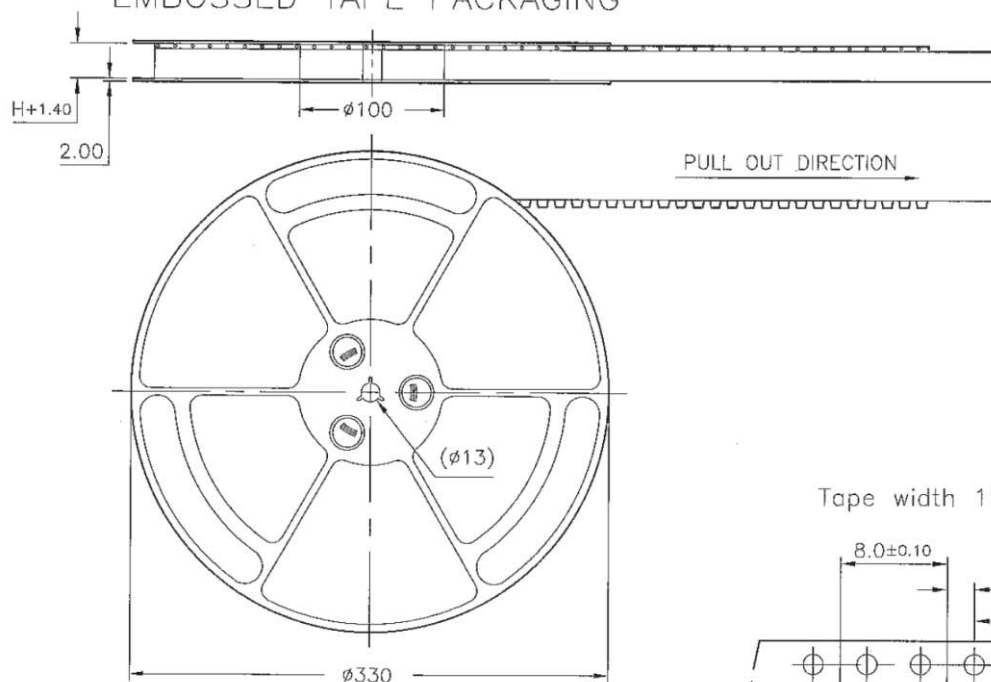

NOTE:

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$
- 2.CARRIER CAMBER IS WITHIN 1 mm IN 250mm.
- 3.MATERIAL : BLACK CONDUCTIVE POLYSTYRENE ALLOY.
- 4.THICKNESS : $0.3\pm 0.05\text{mm}$.
- 5.COMPONENT LOAD PER 13" REEL : 4000 PCS

Tape width 16 and 24 mm

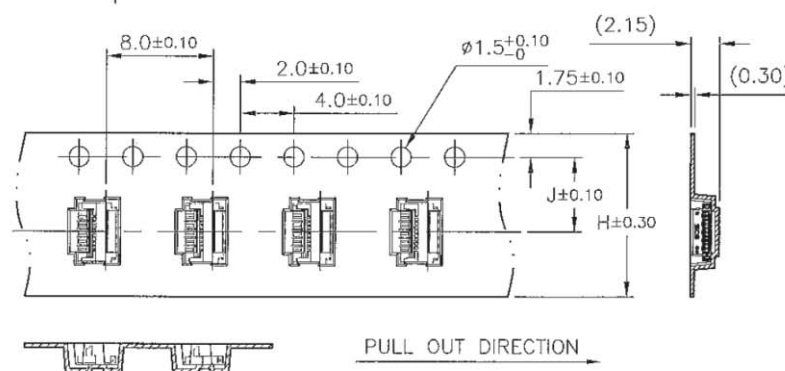

NO.OF CONTACTS	DIM. H	DIM. I	DIM. J
07 ↓ 11	16	—	7.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$


PPOJECTION

照片框

ORDER INFORMATION

FPT-WRD06R-xx-LF
SERIES | | | | LEADFREE
90°SMT | | | | 07.09.11 WAY
HIGH 0.6mm
DUAL CONTACTS
ROTARY ZIF

DESCRIPTION:

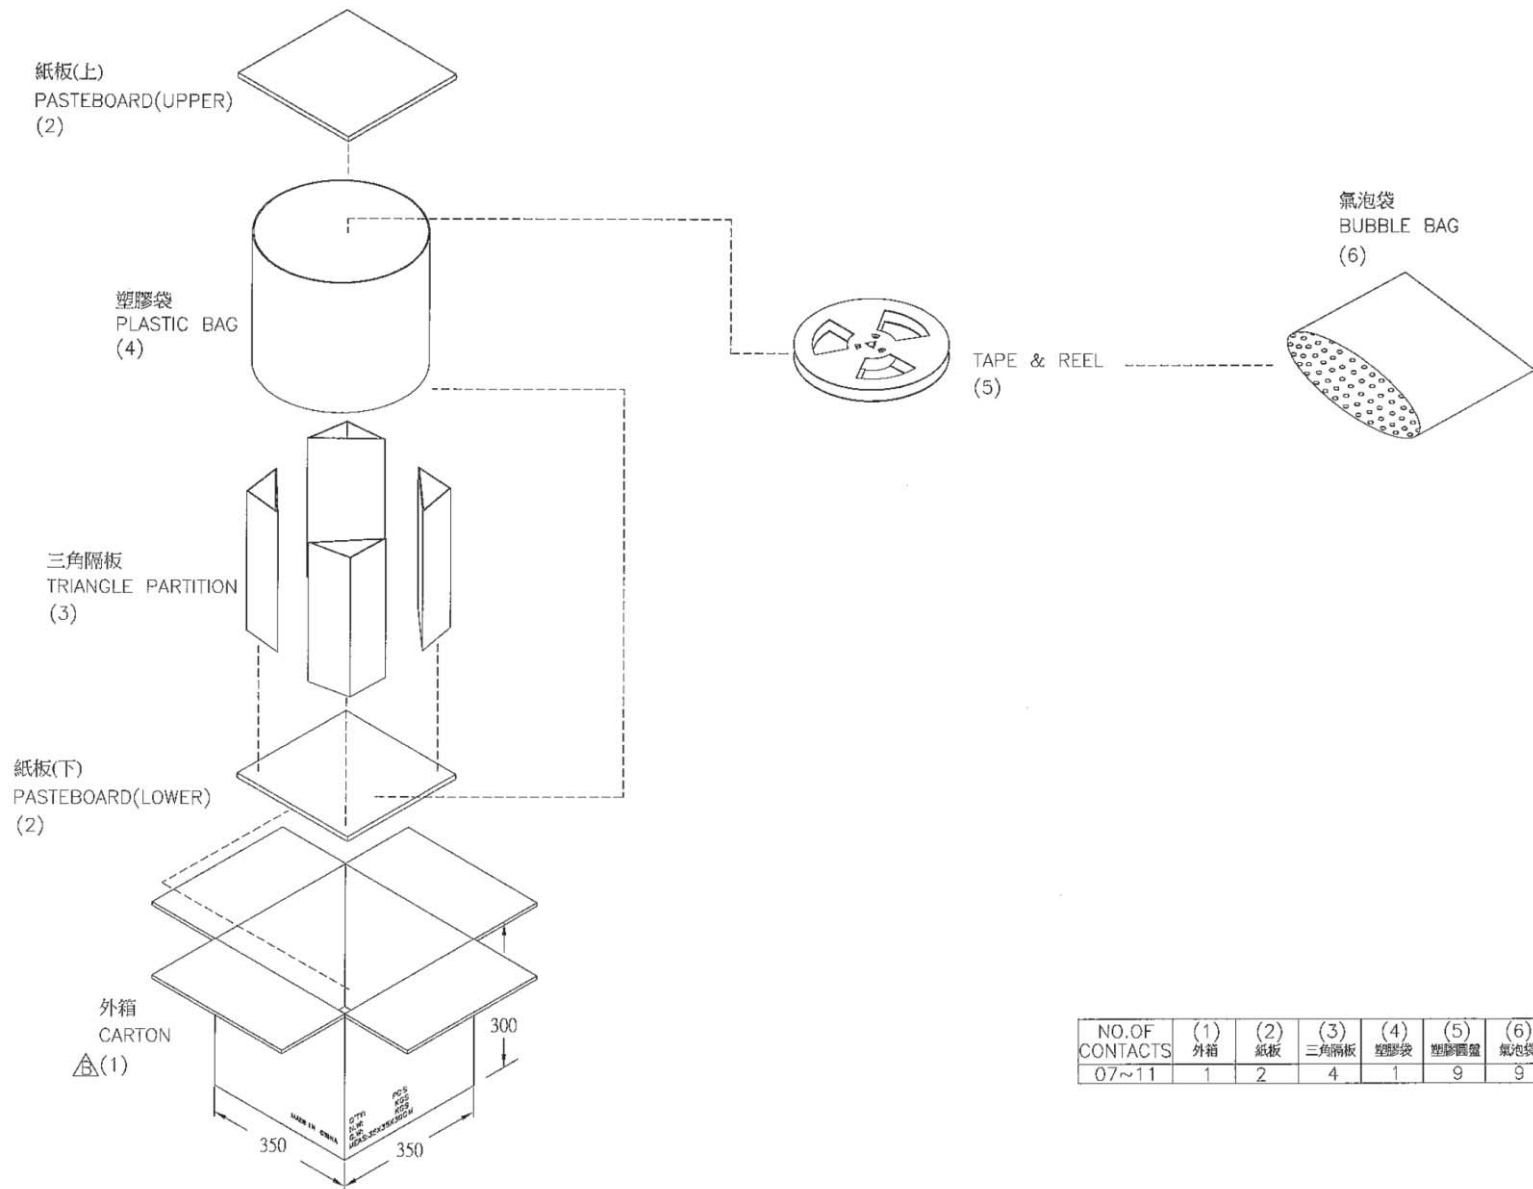

NO. OF CONTACTS	(1) 外箱	(2) 紙板	(3) 三角隔板	(4) 塑膠袋	(5) 塑膠圓盤	(6) 氣泡袋
07~11	1	2	4	1	9	9

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPT-WRD06R-xx-LF
SERIES | | | | LEADFREE
90°SMT | | | | 07.09.11 WAY
| | | | REEL
| | | | HIGH 0.6mm
| | | | DUAL CONTACTS
| | | | ROTARY ZIF

DESCRIPTION: