
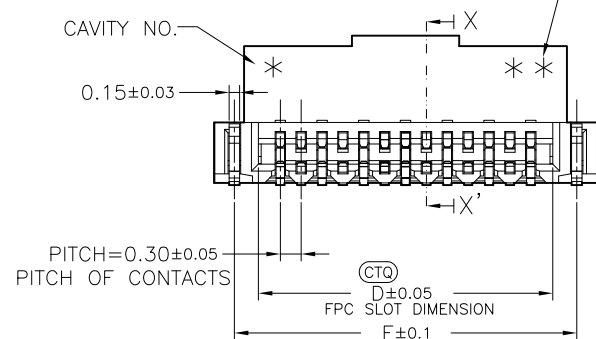


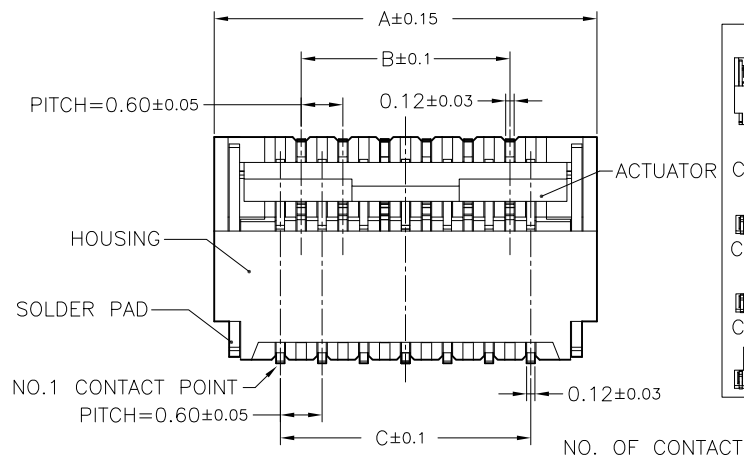

NOTE:

1.MATERIAL:




HOUSING:LCP(UL 94V-0)
ACTUATOR:LCP(UL 94V-0)
TERMINAL:PHOSPHOR BRONZE
STOPPER:PHOSPHOR BRONZE

2.PLATING:

TERMINAL:1u"~3u" GOLD FLASH (NICKEL BARRIER)
STOPPER:TIN OVER NICKEL(LEAD FREE)

3.RATING:

OPERATING VOLTAGE:30Vrms AC
CURRENT RATING:0.2A
OPERATING TEMPERATURE:-55°C ~ +85°C

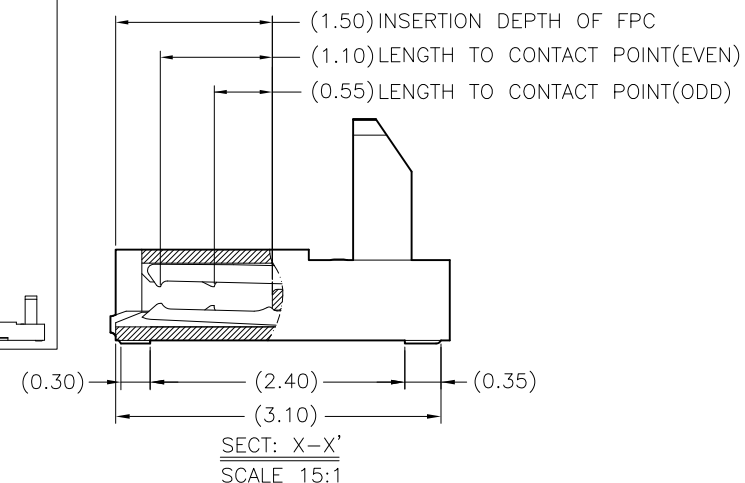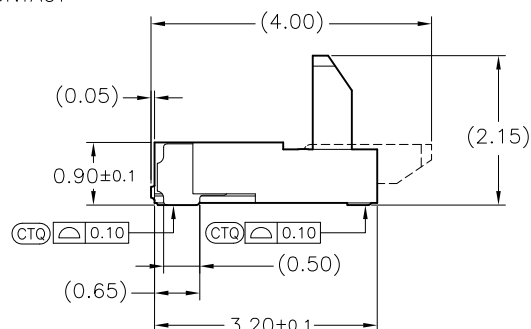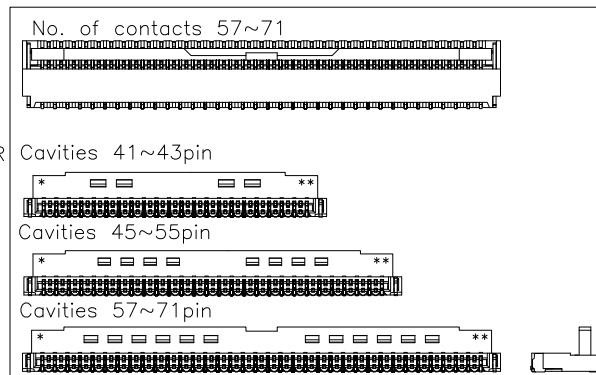

NO.OF CONTACTS	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
09	4.3	1.8	2.4	3.03	3.72
11	4.9	2.4	3.0	3.63	4.32
13	5.5	3.0	3.6	4.23	4.92
15	6.1	3.6	4.2	4.83	5.52
17	6.7	4.2	4.8	5.43	6.12
19	7.3	4.8	5.4	6.03	6.72
21	7.9	5.4	6.0	6.63	7.32
23	8.5	6.0	6.6	7.23	7.92
25	9.1	6.6	7.2	7.83	8.52
27	9.7	7.2	7.8	8.43	9.12
29	10.3	7.8	8.4	9.03	9.72
31	10.9	8.4	9.0	9.63	10.32
33	11.5	9.0	9.6	10.23	10.92
35	12.1	9.6	10.2	10.83	11.52
37	12.7	10.2	10.8	11.43	12.12
39	13.3	10.8	11.4	12.03	12.72
41	13.9	11.4	12.0	12.63	13.32
43	14.5	12.0	12.6	13.23	13.92
45	15.1	12.6	13.2	13.83	14.52
49	16.3	13.8	14.4	15.03	15.72
51	16.9	14.4	15.0	15.63	16.32
57	18.7	16.2	16.8	17.43	18.12
61	19.9	17.4	18.0	18.63	19.32
67	21.7	19.2	19.8	20.43	21.12
71	22.9	20.4	21.0	21.63	22.32

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框


ORDER INFORMATION

FPT-WRD09R-xx-LF
SERIES
90°SMT
LEADFREE
09-71WAY
REEL
HIGH 0.9mm
DUAL CONTACTS
ROTARY ZIF

DESCRIPTION: 0.3mm Pitch FPC Conn. (H=0.9)

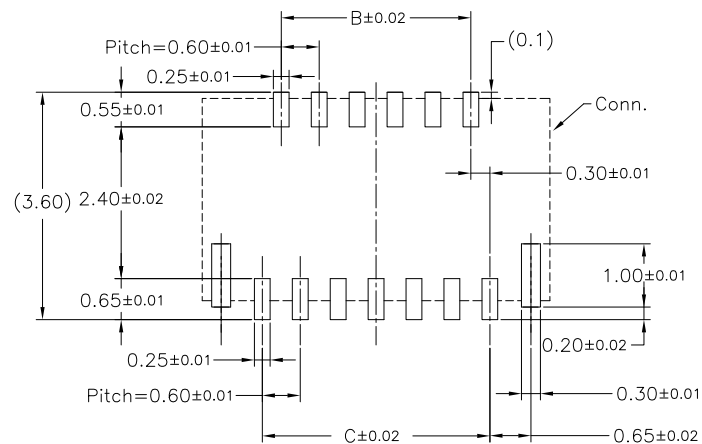

RECOMMENDED METAL MASK PATTERN(THICKNESS 0.1mm)

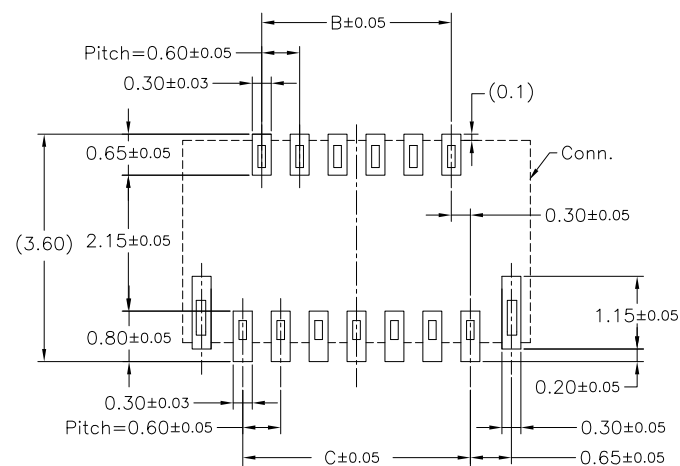

↑
FPC/FFC INSERT DIRECTION

PCB LAYOUT

NO.OF CONTACTS	DIM. B	DIM. C
09	1.8	2.4
11	2.4	3.0
13	3.0	3.6
15	3.6	4.2
17	4.2	4.8
19	4.8	5.4
21	5.4	6.0
23	6.0	6.6
25	6.6	7.2
27	7.2	7.8
29	7.8	8.4
31	8.4	9.0
33	9.0	9.6
35	9.6	10.2
37	10.2	10.8
39	10.8	11.4
41	11.4	12.0
43	12.0	12.6
45	12.6	13.2
49	13.8	14.4
51	14.4	15.0
57	16.2	16.8
61	17.4	18.0
67	19.2	19.8
71	20.4	21.0

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPT-WRD09R-xx-LF

SERIES

90°SMT

LEADFREE

09-71WAY


REEL

HIGH 0.9mm

DUAL CONTACTS

ROTARY ZIF

DESCRIPTION: 0.3mm Pitch FPC Conn. (H=0.9)

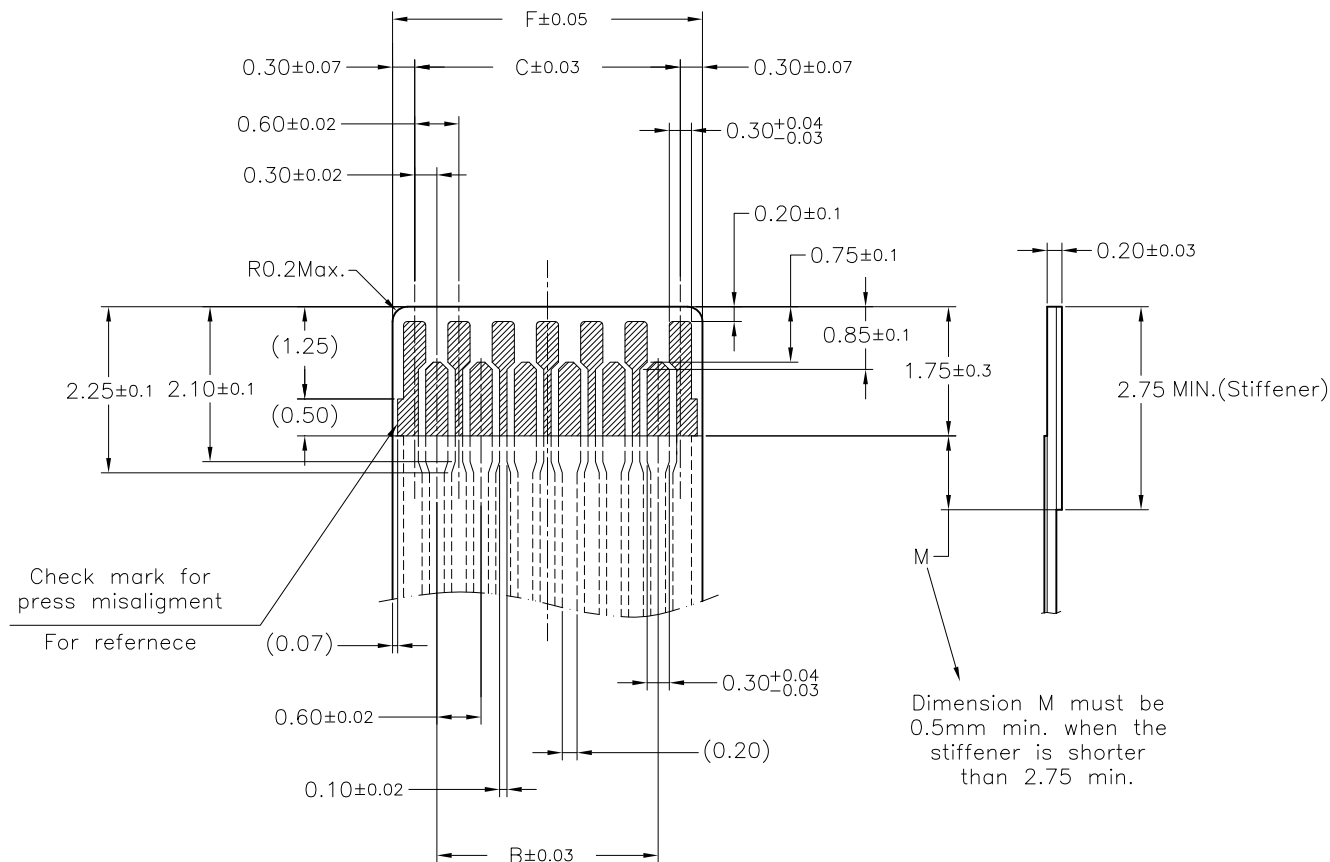

NO.OF CONTACTS	DIM. B	DIM. C	DIM. F
09	1.8	2.4	3.0
11	2.4	3.0	3.6
13	3.0	3.6	4.2
15	3.6	4.2	4.8
17	4.2	4.8	5.4
19	4.8	5.4	6.0
21	5.4	6.0	6.6
23	6.0	6.6	7.2
25	6.6	7.2	7.8
27	7.2	7.8	8.4
29	7.8	8.4	9.0
31	8.4	9.0	9.6
33	9.0	9.6	10.2
35	9.6	10.2	10.8
37	10.2	10.8	11.4
39	10.8	11.4	12.0
41	11.4	12.0	12.6
43	12.0	12.6	13.2
45	12.6	13.2	13.8
49	13.8	14.4	15.0
51	14.4	15.0	15.6
57	16.2	16.8	17.4
61	17.4	18.0	18.6
67	19.2	19.8	20.4
71	20.4	21.0	21.6

APPLICABLE FPC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±


照片框

ORDER INFORMATION

FPT-WRD09R-xx-LF
SERIES | | | | LEADFREE
90°SMT | | | | REEL
DUAL CONTACTS
ROTARY ZIF


DESCRIPTION: 0.3mm Pitch FPC Conn. (H=0.9)

EMBOSSED TAPE PACKING

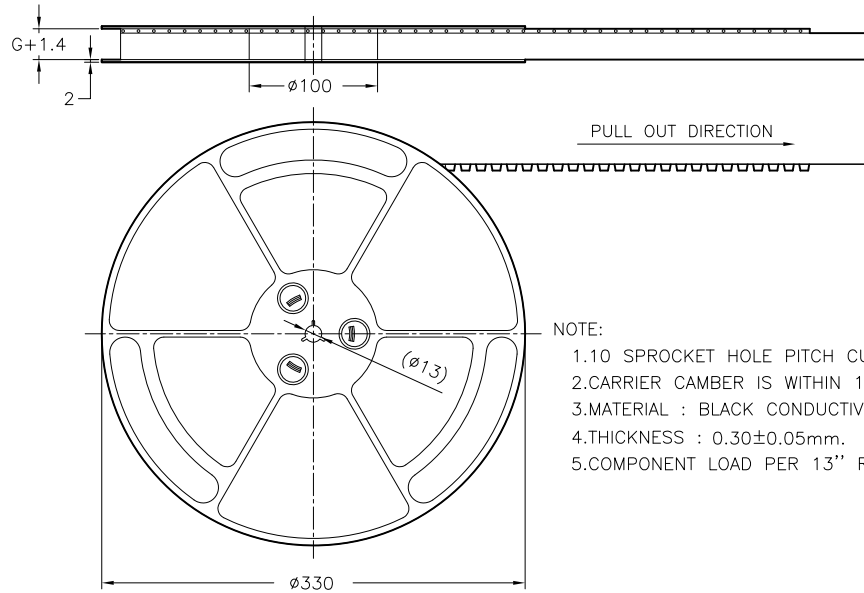


- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2 .
 - 2.CARRIER CAMBER IS WITHIN 1 mm IN 250mm.
 - 3.MATERIAL : BLACK CONDUCTIVE POLYSTYRENE ALLOY.
 - 4.THICKNESS : 0.30 ± 0.05 mm.
 - 5.COMPONENT LOAD PER 13" REEL : 3000PCS.

TAPE WIDTH 12 , 16 AND 24 mm

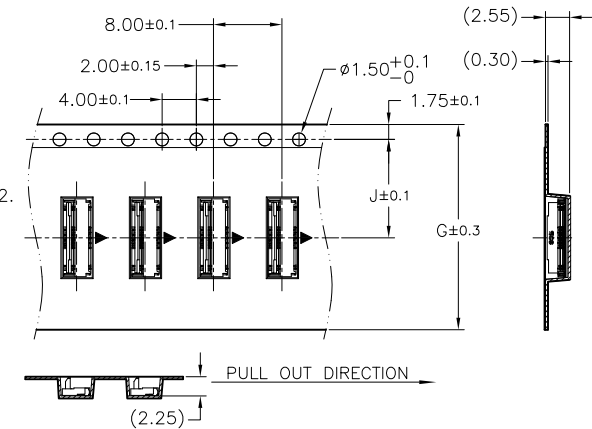

TAPE WIDTH 32 AND 44 mm

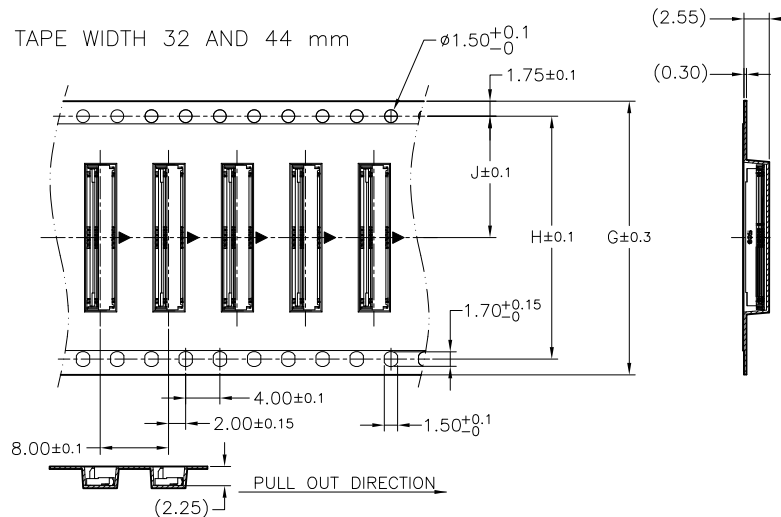

本部品不含有環境管理物質規定之有害物質

NO.OF CONTACTS	DIM. G	DIM. H	DIM. J
09,11	12	—	5.5
13 ↓ 19	16	—	7.5
21 ↓ 45	24	—	11.5
49 ↓ 67	32	28.4	14.2
71	44	40.4	20.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±


PPOJECTION

照片框

ORDER INFORMATION

FPT-WRD09R-xx-LF
SERIES
90°SMT
LEADFREE
09-71WAY
REEL
HIGH 0.9mm
DUAL CONTACTS
ROTARY ZIF

DESCRIPTION: 0.3mm Pitch FPC Conn. (H=0.9)

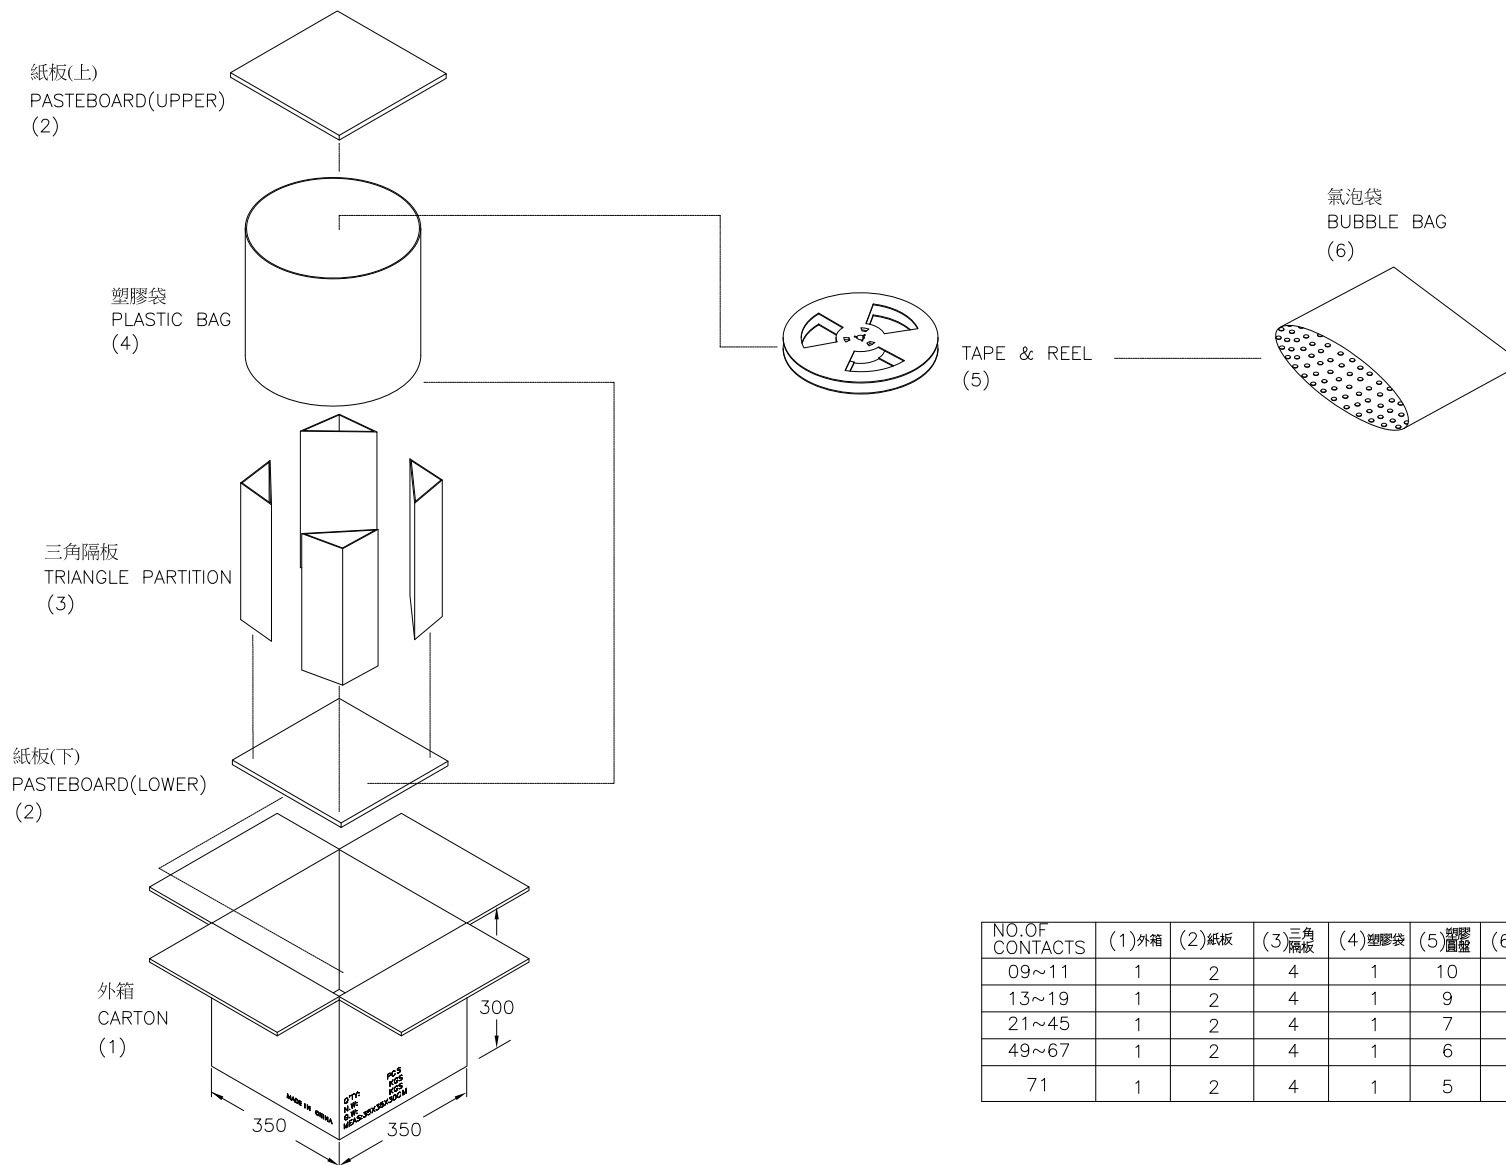

NO. OF CONTACTS	(1) 外箱	(2) 紙板	(3) 三角隔板	(4) 塑膠袋	(5) 塑膠面盤	(6) 氣泡袋
09~11	1	2	4	1	10	10
13~19	1	2	4	1	9	9
21~45	1	2	4	1	7	7
49~67	1	2	4	1	6	6
71	1	2	4	1	5	5

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPT-WRD09R-xx-LF
SERIES
90°SMT
LEADFREE
09-71WAY
REEL
HIGH 0.9mm
DUAL CONTACTS
ROTARY ZIF

DESCRIPTION: 0.3mm Pitch FPC Conn. (H=0.9)