
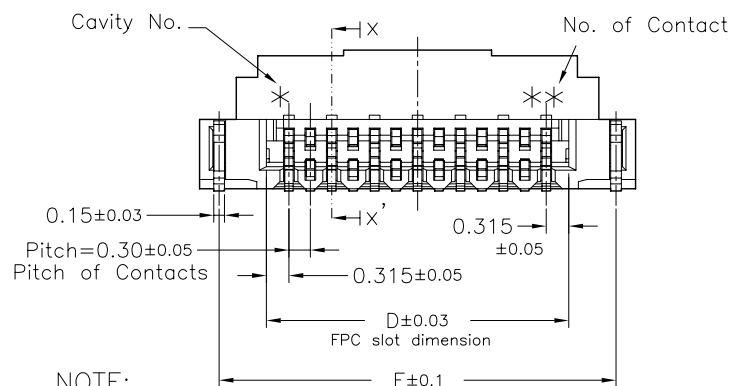


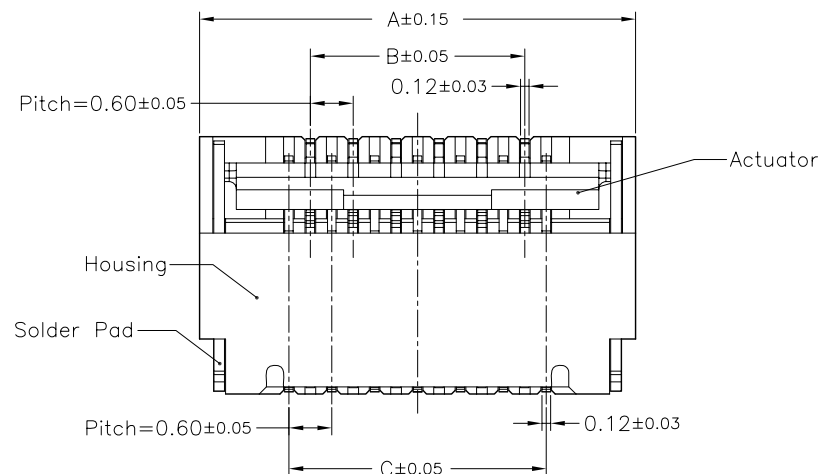



NOTE:

1.MATERIAL:

HOUSING:LCP(UL 94V-0)
ACTUATOR:LCP(UL 94V-0)
TERMINAL:PHOSPHOR BRONZE
STOPPER:PHOSPHOR BRONZE

2.PLATING:

TERMINAL:SEE ORDERING INFORMATION
STOPPER:TIN OVER NICKEL(LEAD FREE)

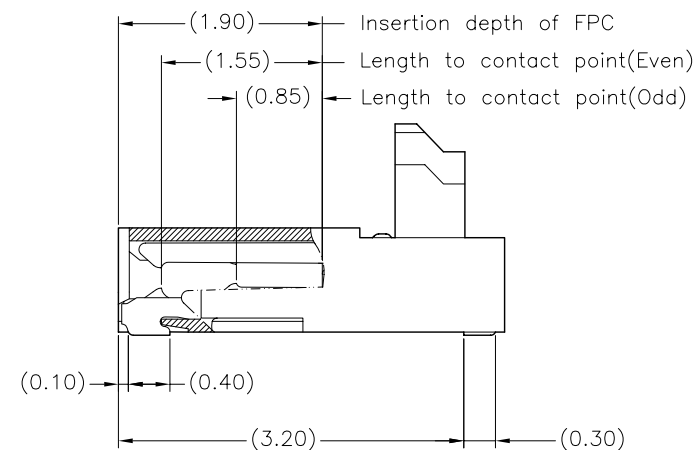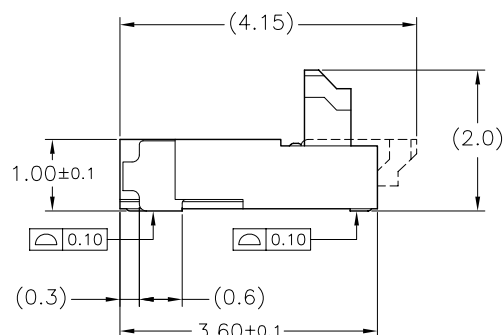

SECT: x-x'

SCALE 15:1

No.of Contacts	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
09	4.9	1.8	2.4	3.03	4.35
11	5.5	2.4	3.0	3.63	4.95
13	6.1	3.0	3.6	4.23	5.55
15	6.7	3.6	4.2	4.83	6.15
17	7.3	4.2	4.8	5.43	6.75
19	7.9	4.8	5.4	6.03	7.35
21	8.5	5.4	6.0	6.63	7.95
23	9.1	6.0	6.6	7.23	8.55
25	9.7	6.6	7.2	7.83	9.15
27	10.3	7.2	7.8	8.43	9.75
29	10.9	7.8	8.4	9.03	10.35

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X.±
.X±
.XX±
.XXX±
ANG±

照片框



ORDER INFORMATION

FPT-WRD10R-xx-LF
SERIES | | | LEADFREE
90°SMT | | | 09-71WAY
| | | REEL
| | | HIGH 1.0mm
| | | DUAL CONTACTS
| | | ROTARY ZIF

DESCRIPTION:

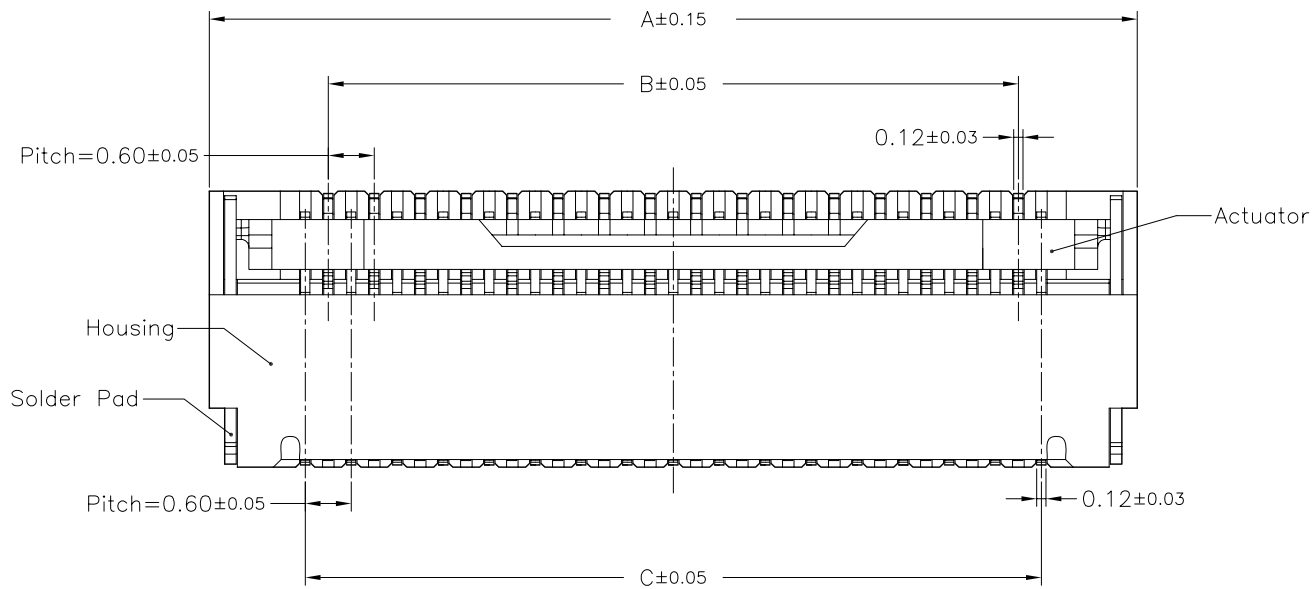

No. of Contacts	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
31	11.5	8.4	9.0	9.63	10.95
33	12.1	9.0	9.6	10.23	11.55
35	12.7	9.6	10.2	10.83	12.15
37	13.3	10.2	10.8	11.43	12.75
39	13.9	10.8	11.4	12.03	13.35
41	14.5	11.4	12.0	12.63	13.95
43	15.1	12.0	12.6	13.23	14.55
45	15.7	12.6	13.2	13.83	15.15
49	16.9	13.8	14.4	15.03	16.35
51	17.5	14.4	15.0	15.63	16.95
57	19.3	16.2	16.8	17.43	18.75
61	20.5	17.4	18.0	18.63	19.95
67	22.3	19.2	19.8	20.43	21.75
71	23.5	20.4	21.0	21.63	22.95

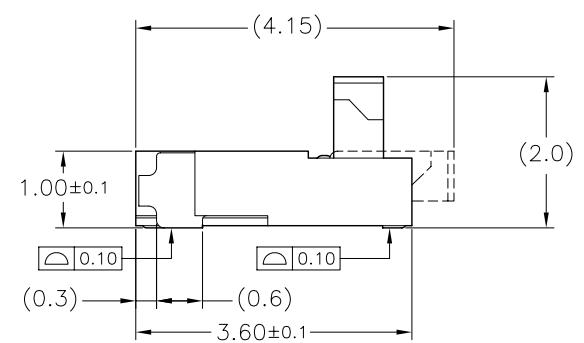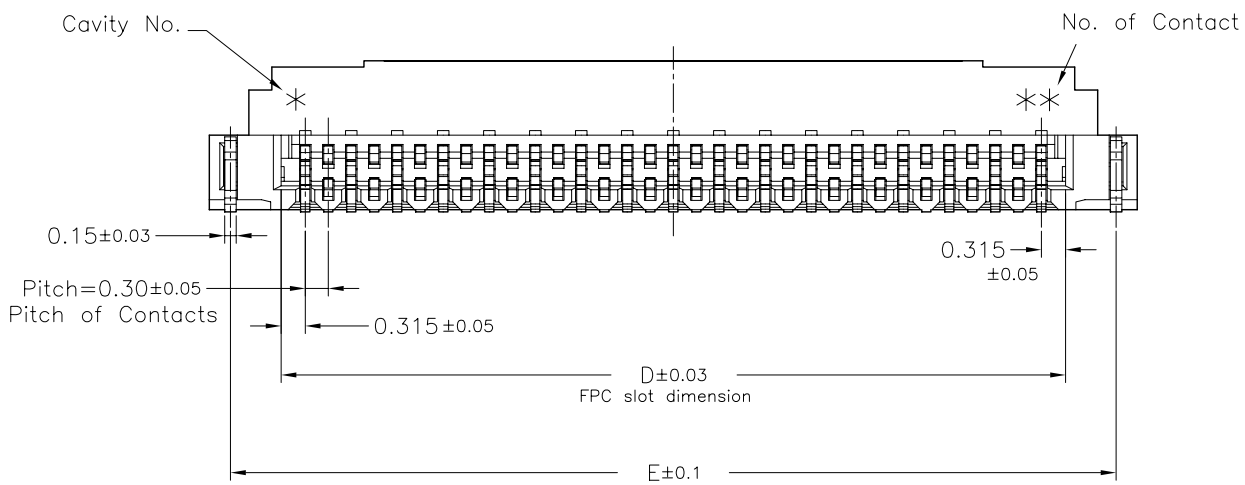

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

FPT-WRD10R-xx-LF
SERIES | REEL | LEADFREE
90°SMT | HIGH 1.0mm | 09-71WAY
DUAL CONTACTS
ROTARY ZIF

DESCRIPTION: 0.3mm Pitch FPC Conn. (H=1.0)

煜倫股份有限公司

www.morethanall.com



No.of Contacts	DIM. B	DIM. C
09	1.8	2.4
11	2.4	3.0
13	3.0	3.6
15	3.6	4.2
17	4.2	4.8
19	4.8	5.4
21	5.4	6.0
23	6.0	6.6
25	6.6	7.2
27	7.2	7.8
29	7.8	8.4
31	8.4	9.0
33	9.0	9.6
35	9.6	10.2
37	10.2	10.8
39	10.8	11.4
41	11.4	12.0
43	12.0	12.6
45	12.6	13.2
49	13.8	14.4
51	14.4	15.0
57	16.2	16.8
61	17.4	18.0
67	19.2	19.8
71	20.4	21.0

TOLERANCES ARE

煜倫股份有限公司

PPROJECTION 

照片框

FPT-WRD10R-xx-LF

SERIES

90°SMT

REEL

HIGH 1.0mm


DUAL CONTACTS

ROTARY ZIF

LEADFREE

09-71WAY

DESCRIPTION: 0.3mm Pitch FPC Conn. (H=1.0)

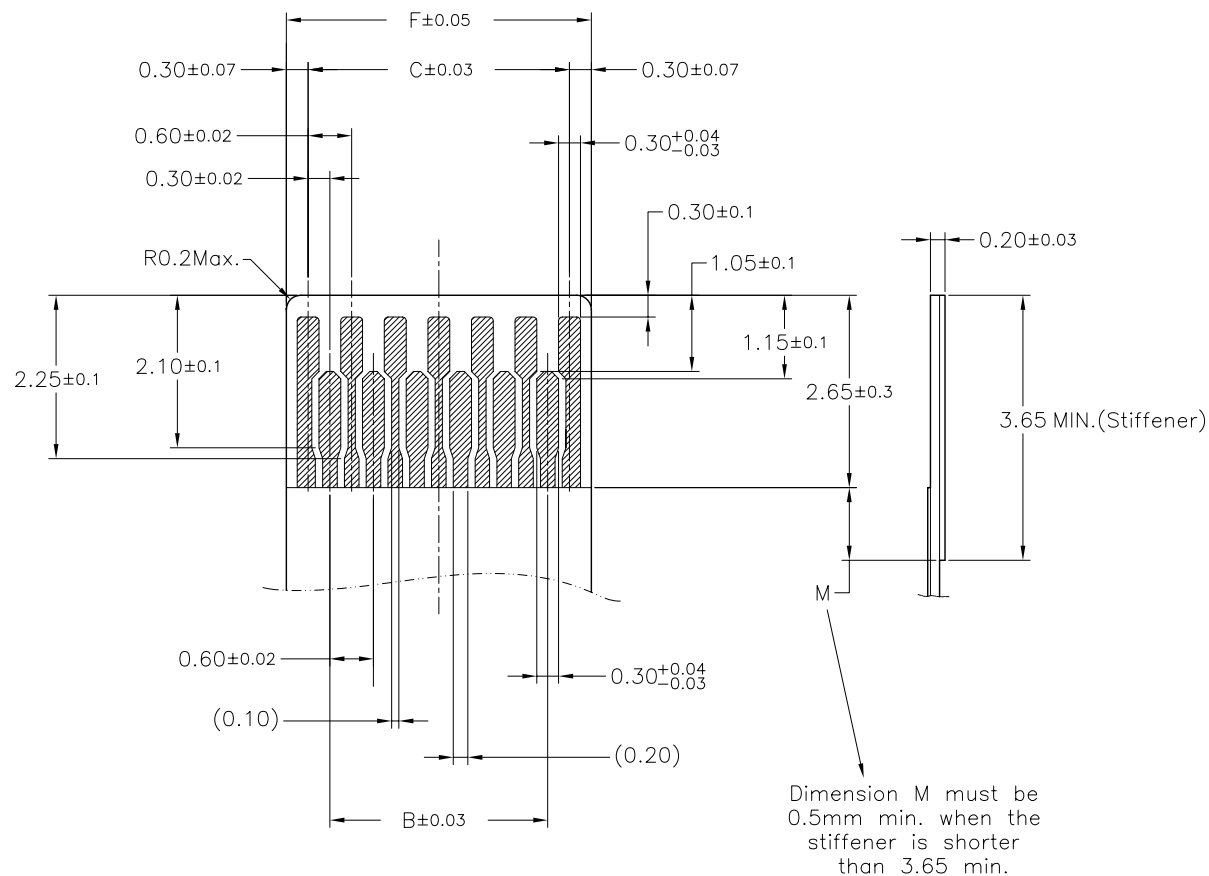

No.of Contacts	DIM. B	DIM. C	DIM. F
09	1.8	2.4	3.0
11	2.4	3.0	3.6
13	3.0	3.6	4.2
15	3.6	4.2	4.8
17	4.2	4.8	5.4
19	4.8	5.4	6.0
21	5.4	6.0	6.6
23	6.0	6.6	7.2
25	6.6	7.2	7.8
27	7.2	7.8	8.4
29	7.8	8.4	9.0
31	8.4	9.0	9.6
33	9.0	9.6	10.2
35	9.6	10.2	10.8
37	10.2	10.8	11.4
39	10.8	11.4	12.0
41	11.4	12.0	12.6
43	12.0	12.6	13.2
45	12.6	13.2	13.8
49	13.8	14.4	15.0
51	14.4	15.0	15.6
57	16.2	16.8	17.4
61	17.4	18.0	18.6
67	19.2	19.8	20.4
71	20.4	21.0	21.6

Applicable FPC

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION


照片框

ORDER INFORMATION

FPT-WRD10R-xx-LF
SERIES REEL 90°SMT
LEADFREE
09-71WAY
HIGH 1.0mm
DUAL CONTACTS
ROTARY ZIF

DESCRIPTION: 0.3mm Pitch FPC Conn. (H=1.0)


EMBOSED TAPE PACKING BL310S SERIES

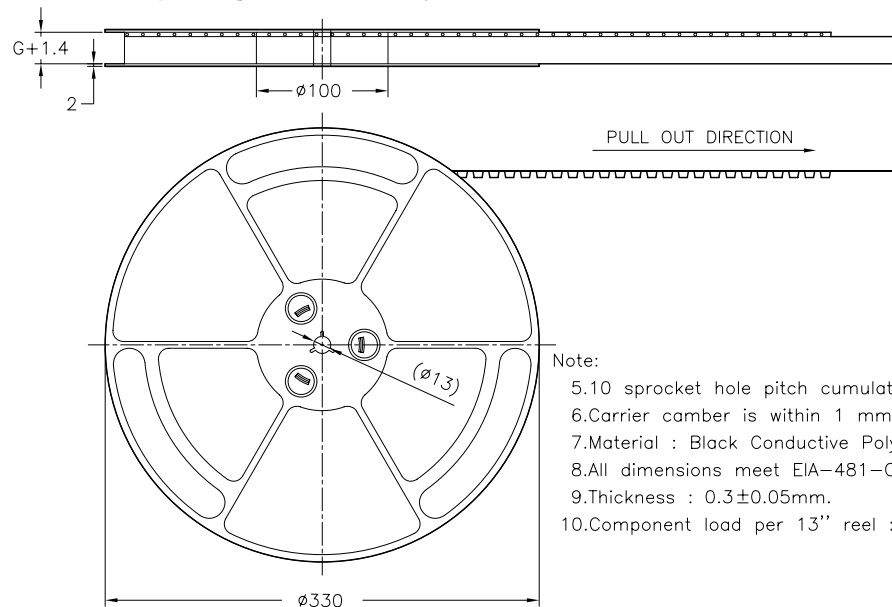


Note:

- 5.10 sprocket hole pitch cumulative tolerance
- 6.Carrier camber is within 1 mm in 250mm.±0.2mm
- 7.Material : Black Conductive Polystyrene Alloy.
- 8.All dimensions meet EIA-481-C requirements.
- 9.Thickness : 0.3±0.05mm.
- 10.Component load per 13" reel : 3500 pcs

Tape width 32 and 44 mm

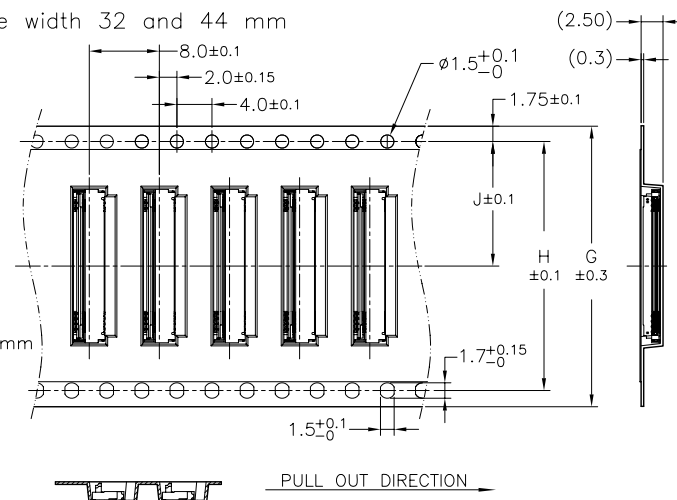

Tape width 12 , 16 and 24 mm

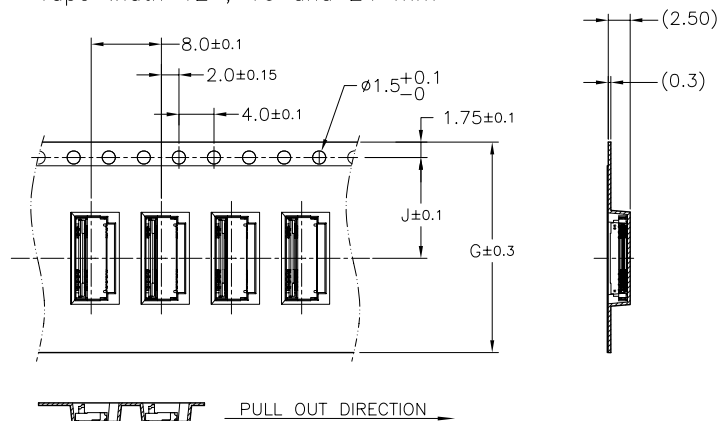

No.of Contacts	DIM. G	DIM. H	DIM. J
09	12	—	5.5
11			
13	16	—	7.5
19			
21	24	—	11.5
45			
49	32	28.4	14.2
51			
57	32	28.4	14.2
67			
71	44	40.4	20.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
X, ±
.XX ±
.XXX ±
ANG ±


PPOJECTION

照片框

ORDER INFORMATION

FPT-WRD10R-xx-LF
SERIES | REEL | LEADFREE
90°SMT | HIGH 1.0mm | DUAL CONTACTS
ROTARY ZIF

DESCRIPTION: 0.3mm Pitch FPC Conn. (H=1.0)

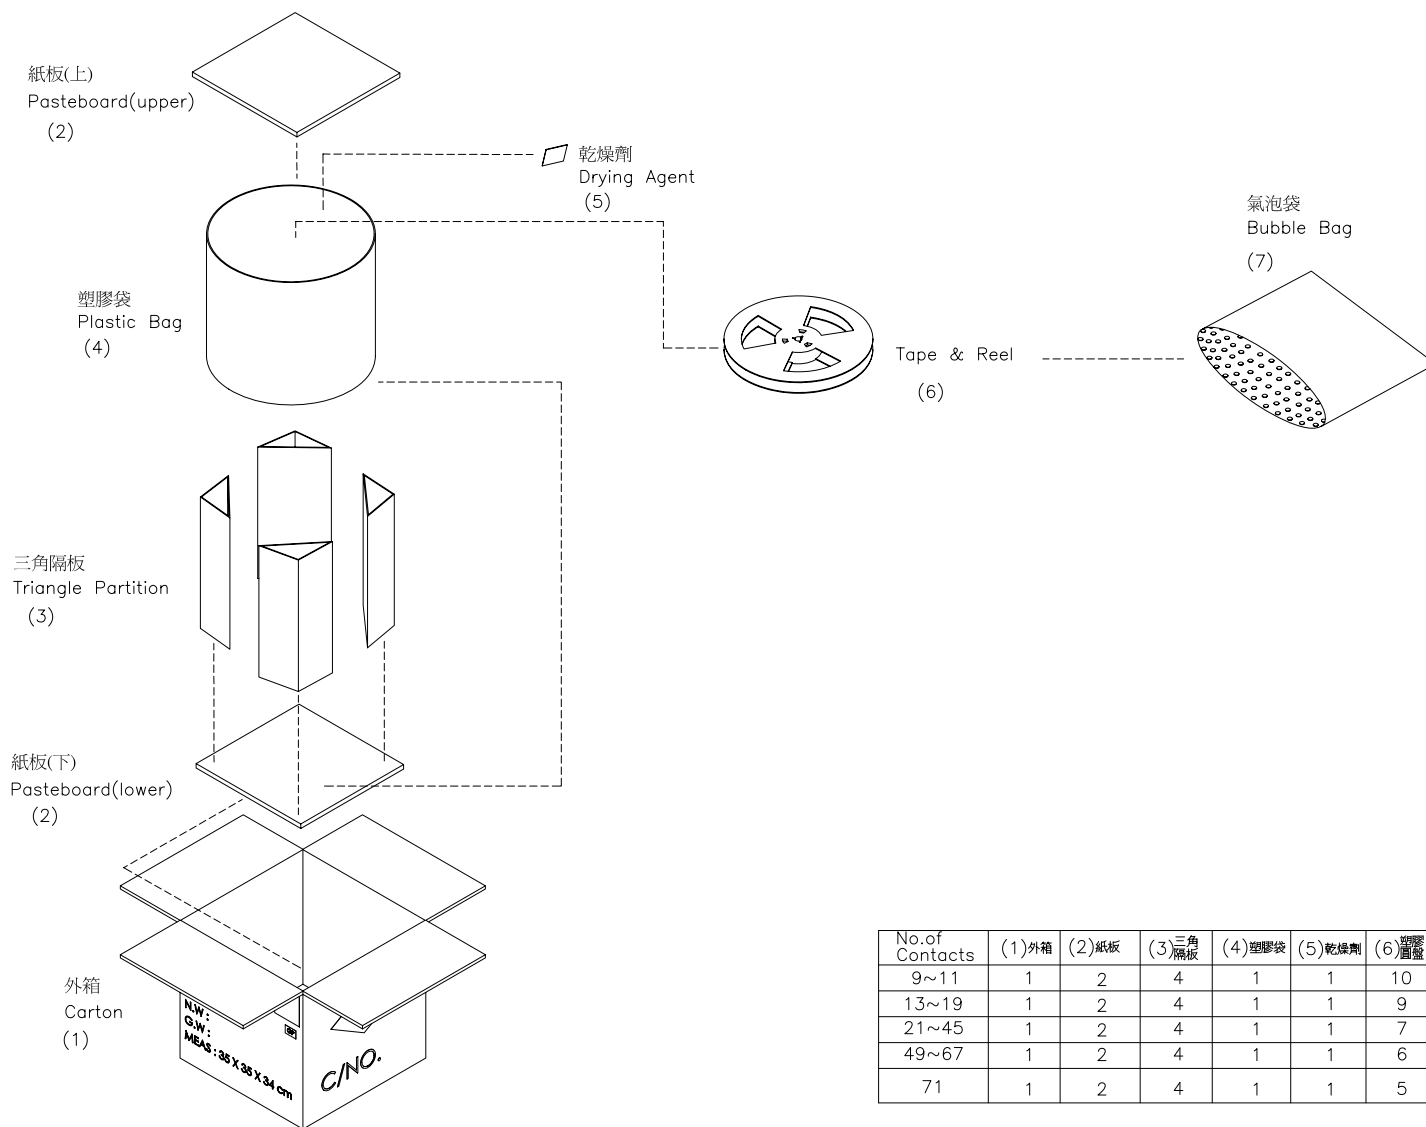

No. of Contacts	(1) 外箱	(2) 紙板	(3) 三角隔板	(4) 塑膠袋	(5) 乾燥劑	(6) 塑膠袋	(7) 氣泡袋
9~11	1	2	4	1	1	10	10
13~19	1	2	4	1	1	9	9
21~45	1	2	4	1	1	7	7
49~67	1	2	4	1	1	6	6
71	1	2	4	1	1	5	5

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPT-WRD10R-xx-LF
SERIES | | | | LEADFREE
90°SMT | | | | REEL
HIGH 1.0mm
DUAL CONTACTS
ROTARY ZIF

DESCRIPTION: 0.3mm Pitch FPC Conn. (H=1.0)