

J

I

H

G

F


E

D

C

B

A

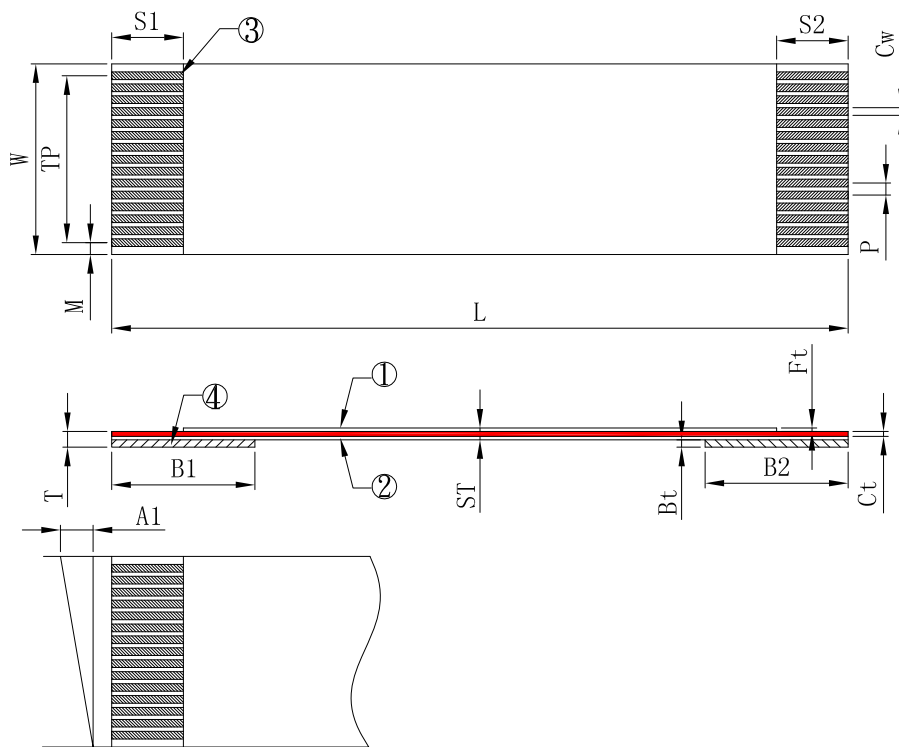

Symbol 标号	Item 项目	Specification 规格
N	No. of Conductors(导体芯数)	9
P	Pitch(间距)	0.50±0.05
TP	Total Pitch(总间距)	4.0±0.1
W	Width(总宽度)	5.0±0.1
M	Margin(边缘宽度)	0.50±0.10
L	Total Length(总长度)	75±3
T	Insertion Thickness(插入厚度)	0.335±0.050
ST	FFC Body Thickness(线身厚度)	0.170±0.030
S1/S2	Conductor Strip Length(裸铜长度)	4/4±1
B1/B2	Supporting tape Length(补强板长度)	6/6±2
Cw	Conductor Width(导体宽度)	0.32±0.03
Ct	Conductor Thickness(导体厚度)	0.050±0.005
Ft	Insulation Film Thickness(绝缘膜厚度)	0.060±0.005
Bt	Supporting tape Thickness(补强板厚度)	0.225±0.005
A1	Slanting(线口倾斜度)	<0.5

ELECTRICAL CHARACTERISTICS

Conductor Resistance: JISC-3102(at20℃) 2.20Ω /KM Max.

Insulation Resistance: Apply the voltage of DC 500V
for one min 100MΩ Min.

Dielectric Strength: Apply AC 500V for one minute.

Continuity Test: Apply microtest machine No Open/Short

Rated voltage & temperature:UL Sub.758VW-1

Material

Insulation: Flame Retardant Polyeste

Color: White

Conductor: Copper with 1u m min.tin-Plating

Supporting Tape: Flame Retardant Polyester

Color: Blue

4	FFC-ST-0.225*9 环保ROHS	5.0	mm	XSD0
3	FFC-CN-0.050*0.32 环保ROHS	0.56896	g	MX00
2	FFC-FD-0.060*75 环保ROHS	W=4.5 L=75	mm	XSD0
1	FFC-FM-0.060*75 G-NS 环保ROHS	W=45 L=63	mm	XSD0
序号	品 名/规 格	用量	单位	代码

FPV-CA09-075-LF

LEADFREE

RoHS Compliant

MORETHANALL CONNECTORS ASSEMBLIES 煜倫股份有限公司	PART NO. FPV-CA09-075		RoHS Compliant							
	DWG NO. FPV-CA09-075		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:					
	FILE NO.		DRAWING BY							
	UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE		