


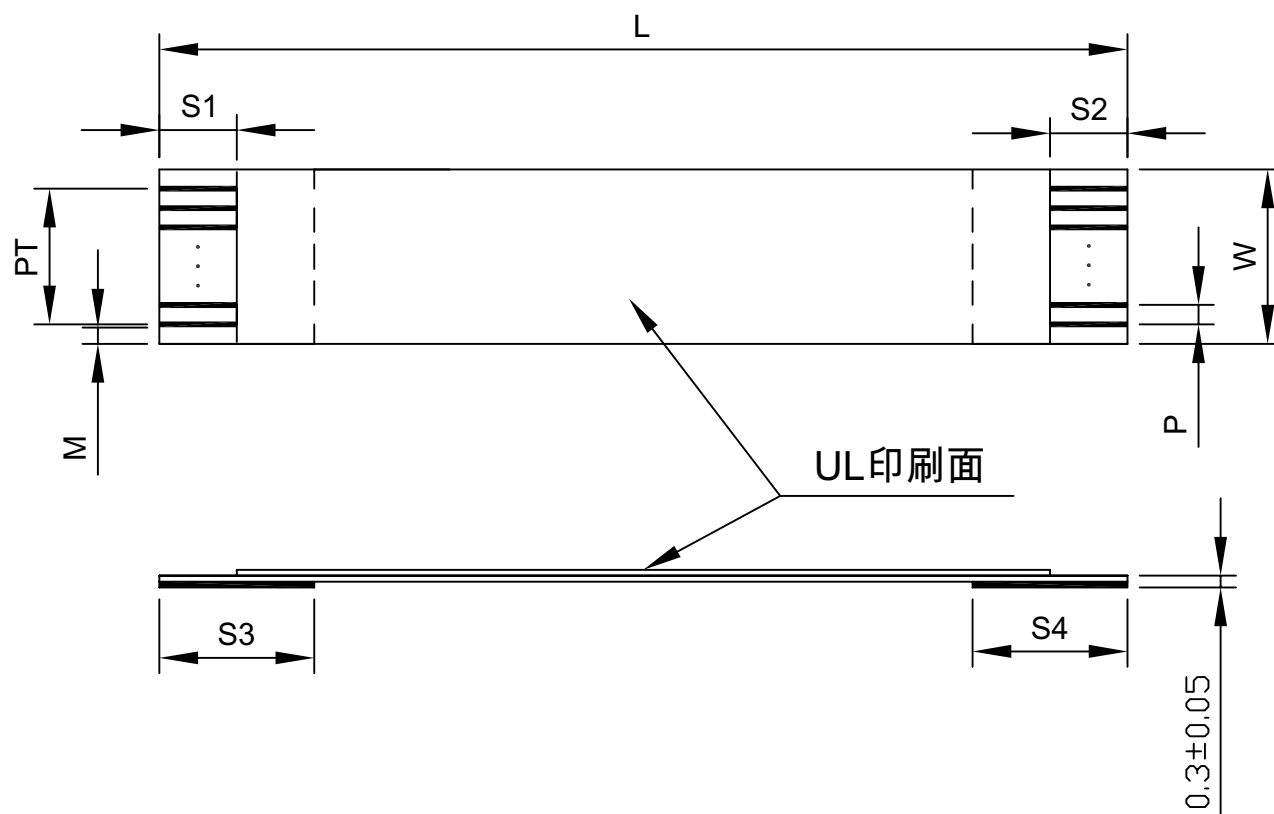

NOTES:

導體數	Num. of conductors	14pins
導體	conductor width	0.3*0.035
導體間距	Pitch(P)	0.5mm
成品總長度	L	200±5
成品總寬度	W	7.5±0.1
導體總間距	PT	6.5±0.15
邊緣寬度	M	0.35±0.1
露銅長度	S1	3±1
露銅長度	S2	3±1
加強板寬度	S3	5±1
加強板寬度	S4	5±1

Available UL Standard:20624 80°C,60V

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-CA14-200-LF
SERIES LEADFREE
200mm
14 WAY
SAME SIDES
CABLE

DESCRIPTION: