


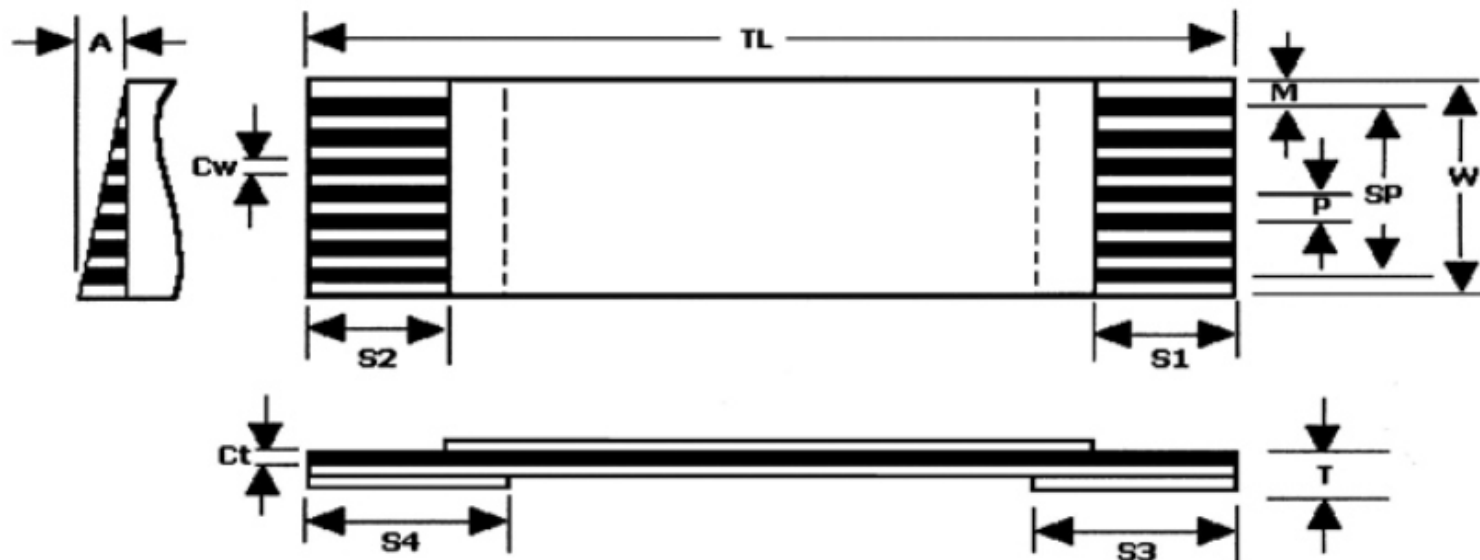

C											
SYMBOL	P	W	SP	M	A	TL	T	S1	S2	S3	S4
RANGE	0.5	12.5	11.5	0.5	0	200	0.3	4	4	6	6
TOLERANCE	±0.05	±0.1	±0.08	±0.05	<0.5	±2.0	±0.05	±1	±1	±1	±1
CONDUCTOR		Tin Plated			THICKNESS (Ct)		0.05		±0.01		
SPECIFICATION		Copper wire (Tin 2~5u)			WIDTH (Cw)		0.3		±0.03		

FPV-CA24-200-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. **FPV-CA24-200**

DWG NO. **FPV-CA24-200**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司