


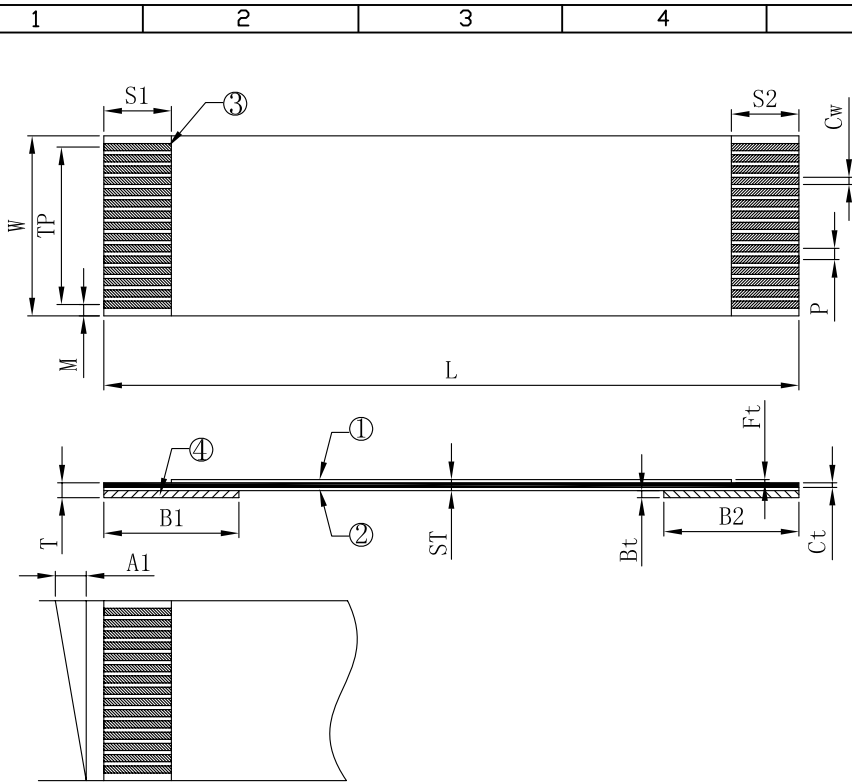

Symbol 标号	Item 项目	Specification 规格
N	No. of Conductors(导体芯数)	28
P	Pitch(间距)	0.50±0.05
TP	Total Pitch(总间距)	13.5±0.1
W	Width(总宽度)	14.5±0.1
M	Margin(边缘宽度)	0.50±0.10
L	Total Length(总长度)	50±3
T	Insertion Thickness(插入厚度)	0.318±0.050
ST	FFC Body Thickness(线身厚度)	0.170±0.030
S1/S2	Conductor Strip Length(裸铜长度)	4/4±1
B1/B2	Supporting tape Length(补强板长度)	6/6±2
Cw	Conductor Width(导体宽度)	0.32±0.03
Ct	Conductor Thickness(导体厚度)	0.050±0.005
Ft	Insulation Film Thickness(绝缘膜厚度)	0.043±0.005
Bt	Supporting tape Thickness(补强板厚度)	0.225±0.005
A1	Slanting(线口倾斜度)	<0.5

ELECTRICAL CHARACTERISTICS

Conductor Resistance: JISC-3102(at20℃) 2.20Ω/M Max.

Insulation Resistance: Apply the voltage of DC 500V
for one minute 100MΩ Min.

Dielectric Strength: Apply AC 500V for one minute.

Continuity Test: Apply microtest machine No Open/Short

Rated voltage & temperature:UL20624 60V 80℃

Material

Insulation: Flame Retardant Polyeste

Color: White

Conductor: Copper with 1u m min.tin-Plating

Supporting Tape: Flame Retardant Polyester

Color: Blue

FPV-CA28-050-LF
LEADFREE

RoHS Compliant

4	FFC-ST-0.225*13 环保ROHS	14.5	mm	XSD0
3	FFC-CN-0.050*0.32 环保ROHS	1.024128	g	MX00
2	FFC-FD-0.060*120 环保ROHS	W=14.5 L=50	mm	XSD0
1	FFC-FM-0.060*120 G-NS 环保ROHS	W=14.5 L=54	mm	XSD0
序号	品 名 / 规 格	用量	单位	代码

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FPV-CA28-050

DWG NO. FPV-CA28-050

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司