
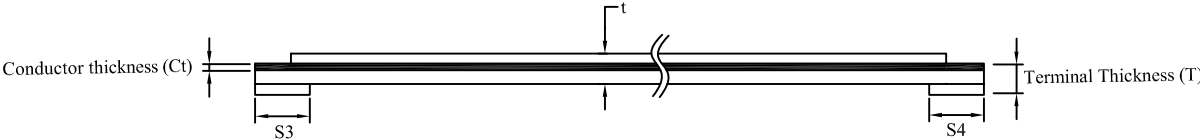


UL Style No : UL2896 / 80° C , 30V

Conductor : Tin Plated Copper Conductor
Thickness(Ct): 0.05±0.01mm
Width(Cw): 0.3±0.02mm
Tin plating thickness: 1~3 μ

Insulation : Polyester (PET) film+adhesive
PET film thickness: 0.019mm
PET adhesive thickness: 0.024mm

Supporting tape : Polyester (PET) film+ adhesive
PET film thickness: 0.188mm
PET adhesive thickness: 0.032mm

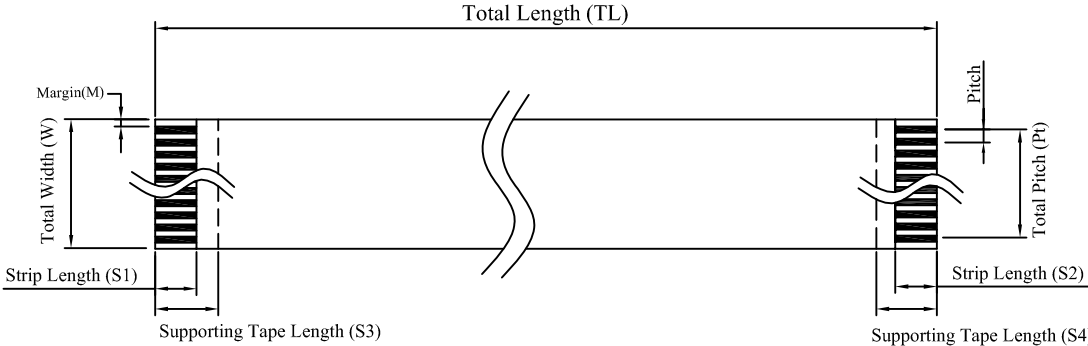


FPV-CA51-300-LF
LEADFREE

RoHS Compliant

RoHS Compliant

SYMBOL	Pitch	PIN	TYPE	TL	Pt	W	M	T	t	S1	S2	S3	S4
RANGE	0.5	51	C	300	25	26	0.35	0.3	0.13	3	3	5	5
TOLERANCE	±0.05	ditto	ditto	±2.0	±0.08	±0.08	±0.05	±0.03	±0.01	±1.0	±1.0	±1.0	±1.0



PART NO. FPV-CA51-300									
DWG NO. FPV-CA51-300		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:					
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1 : 1	PROJECTION 		AREA	REVISIONS	HK	DATE		

煜倫股份有限公司