


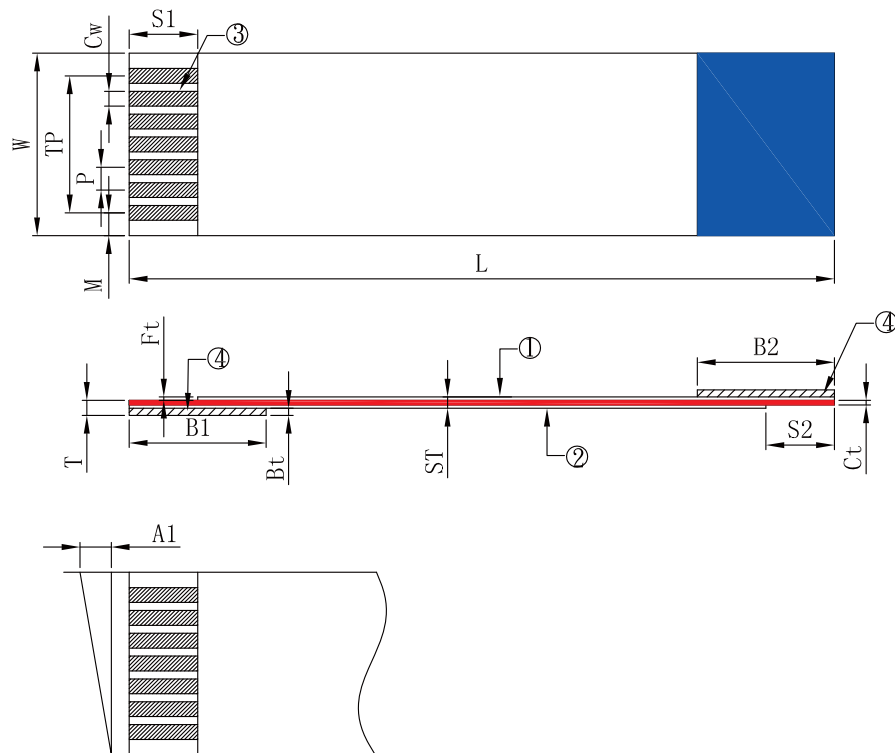

Symbol 标号	Item 项目	Specification 规格
N	No. of Conductors(导体芯数)	40
P	Pitch(间距)	0.50±0.05
TP	Total Pitch(总间距)	19.5±0.15
W	Width(总宽度)	20.5±0.15
M	Margin(边缘宽度)	0.5±0.1
L	Total Length(总长度)	200±3.0
T	Insertion Thickness(插入厚度)	0.255±0.05
ST	FFC Body Thickness(线身厚度)	0.155±0.03
S1/S2	Conductor Strip Length(裸铜长度)	4/4±1.0
B1/B2	Supporting tape Length(补强板长度)	6/6±2.0
Cw	Conductor Width(导体宽度)	0.32±0.03
Ct	Conductor Thickness(导体厚度)	0.035±0.005
Ft	Insulation Film Thickness(绝缘膜厚度)	0.060±0.005
Bt	Supporting tape Thickness(补强板厚度)	0.160±0.005
A1	Slanting(线口倾斜度)	<0.5

ELECTRICAL CHARACTERISTICS

Conductor Resistance: JISC-3102(at20℃) 2.20Ω/M Max.

Insulation Resistance: Apply the voltage of DC 500V
for one minute 100MΩ Min.

Dielectric Strength: Apply AC 500V for one minute.

Continuity Test: Apply microtest machine No Open/Short

Rated voltage & temperature:UL20624 60V 80℃

Material

Insulation: Flame Retardant Polyeste

Color: Black

Conductor: Copper with 1u m min.tin-Plating

Supporting Tape: Flame Retardant Polyester

Color: Blue

4	FFC-ST-0.160*12 环保ROHS	20.5	mm
3	FFC-CN-0.035*0.32 环保ROHS	0.4380992	g
2	FFC-FD-0.060*120 环保ROHS	W=20.5 L=196mm	mm
1	FFC-FM-0.060*120 G-NS 环保ROHS	W=20.5 L=196mm	mm
序号	品名/规格	用量	单位

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

FPV-CB40-200(025)-LF

SERIES

200mm

40 WAY

BOTH SIDES

FPC CABLE

LEADFREE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com