


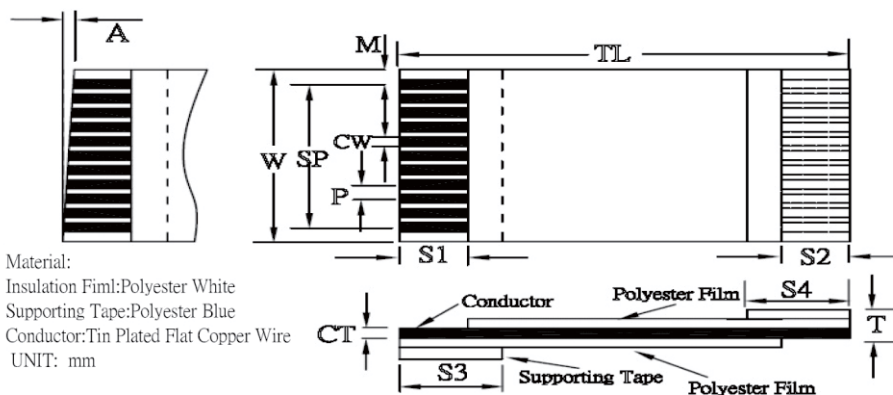

SYMBOL	P	W	SP	M	A	TL	T	S1	S2	S3	S4
RANGE	0.5	20.5	19.5	0.5	0.0	250.0	0.3	4.0	4.0	6.0	6.0
TOLERANCE	±0.05	±0.10	±0.08	±0.05	<0.5	±2.0	±0.05	±1.0	±1.0	±1.0	±1.0
CONDUCTOR	TIN PLATED COPPER WIRE (TIN 1um以上)		THICKNESS(Ct)		0.05		±0.01				
SPECIFICATION									0.32		

FFC CABLE Characteristics 特性表

UL STYLE: 20624

	Test Item 測試項目	Testing Method 測試方法	Specification 規格
1	Conductor resistance 導體阻抗	JIS-C-3102(at20°C)	2.20Ω/KM MAX.
2	Insulation resistance 絕緣阻抗	Apply the voltage of DC 500V for min	More than 1000MΩ 小於1000MΩ
3	Dielectric Strength 耐壓強度	AC 500V, 0.5Ma, 1分鐘, 相鄰兩導體在空氣中	PASS
4	Continuity Test 導通測試	Apply Test DC 3V	No open/Short Circuit
5	Rated Voltage & Temperature 額定電壓及溫度	UL Sub, 758	60V 80°C
6	Operating Temperature 操作溫度	Fixed Wiring Condition	-20°C ~ 80°C
7	Flammability Test 耐燃性測試	UL Sub, 758 V W-1	PASS
8	Heat Resistance 抗熱測試	85°C / 95Hrs	No Trouble with insulation Resistance and withstand voltage 絕緣電阻與耐電壓符合要求
9	Humidity Resistance 抗溼測試	40°C, 95%RH, 96Hrs	
10	Temperature Cycling Test 溫度循環測試	-40°C ~ -25°C ~ -85°C ~ -25°C ORH 65RH	
11	Flexing Test 柔性測試	600g 重物垂吊夾具, 0.5R, 180度 60cycle/min 往復運動	耐曲折測試 ≥ 100cycle
12		10R, 180mm, 70cycle/min 往復運動	耐曲折測試 ≥ 100,000cycle
13	Abrasion Test 耐磨測試	Ø0.5mm, 600g, 60cycle/min	Min 100,000cycles 100,000回以上

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

FPV-CB40-250-LF
 SERIES | | | LEADFREE
 | | | 250mm
 | 40 WAY
 | BOTH SIDES
 | FPC CABLE

DESCRIPTION: