

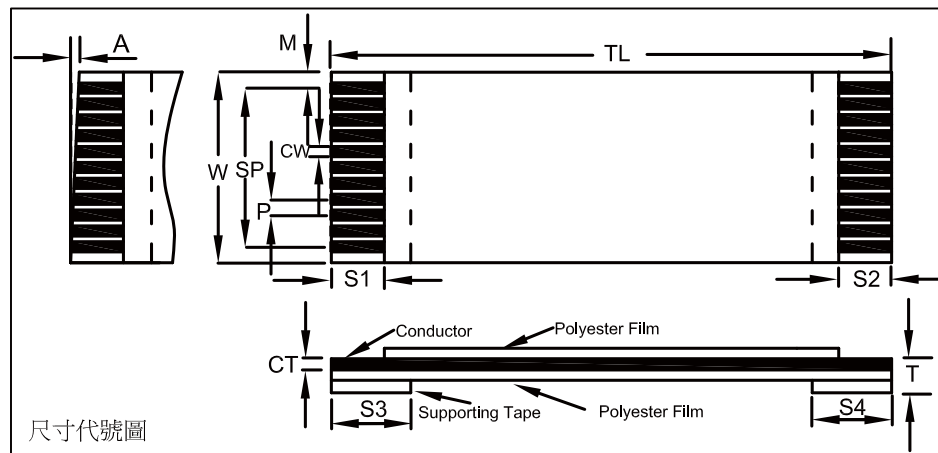


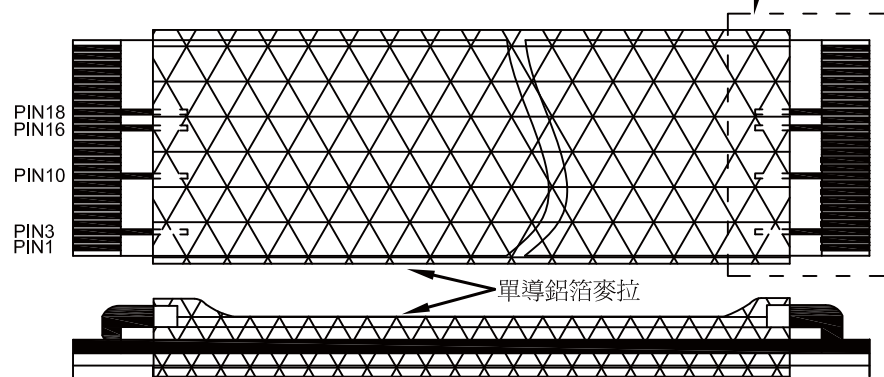

線材加工圖

加工項目:

- 線外加工:第3/10/16/18雙重PIN倒折貼入鋁箔麥拉下層
- 右邊(補強板面)末端往左起算9mm處畫1條0.5mm寬黑色直線

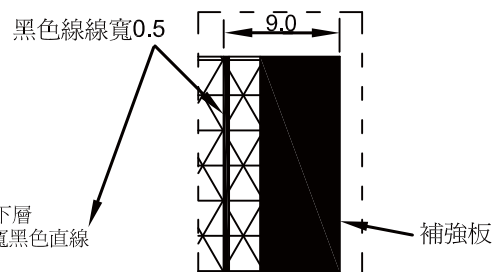

No. of Conductor		26									
SYMBOL	P	W	SP	M	A	TL	T	S1	S2	S3	S4
RANGE	0.5	13.5	12.5	0.5	0	34	0.3	4	4	6	6
TOLERANCE	±0.05	±0.1	±0.1	±0.1	±0.5	±2	±0.05	±1	±1	±2	±2
CONDUCTOR		Tin Plated Copper				Thickness(Ct)			0.05		±0.01
SPECIFICATION		Wire (Tin 1~3um)				Width(Cw)			0.32		±0.03

Note:

UL Style: 20706 105°C 60V

ROSH: YES

Operating Temperature: -30°C~85°C

Dielectrice Strength: AC500V / 10ma / 1 min

Rated Current: 1A

儲存環境: 16°C~27°C / 濕度 65RH%

Material:

Insulation Fiml:

Polyester White

Supporting Tape:

Polyester Blue

Conductor:

Tin Plated Flat Copper Wire

EMI對策:

鋁箔麥拉+導電膠

單導鋁箔麥拉結構表示圖



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-CS26-034-LF
SERIES | LEADFREE
34mm
26 WAY
SAME SIDE SHLD
CABLE

DESCRIPTION: 0.5PH 26PIN L=34mm C TYPE +鋁箔+4接地+畫黑色線1條