



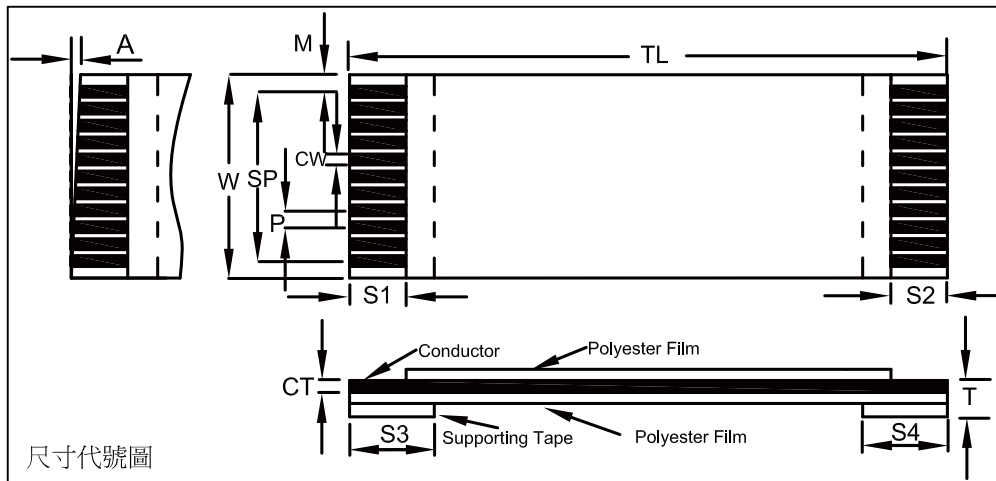

線材加工圖

加工項目:

- 線外加工:第16/20/24/28/32/39雙重PIN倒折貼入鋁箔麥拉下層
- 右邊末端往左起算15mm處畫1條0.5mm寬黑色直線

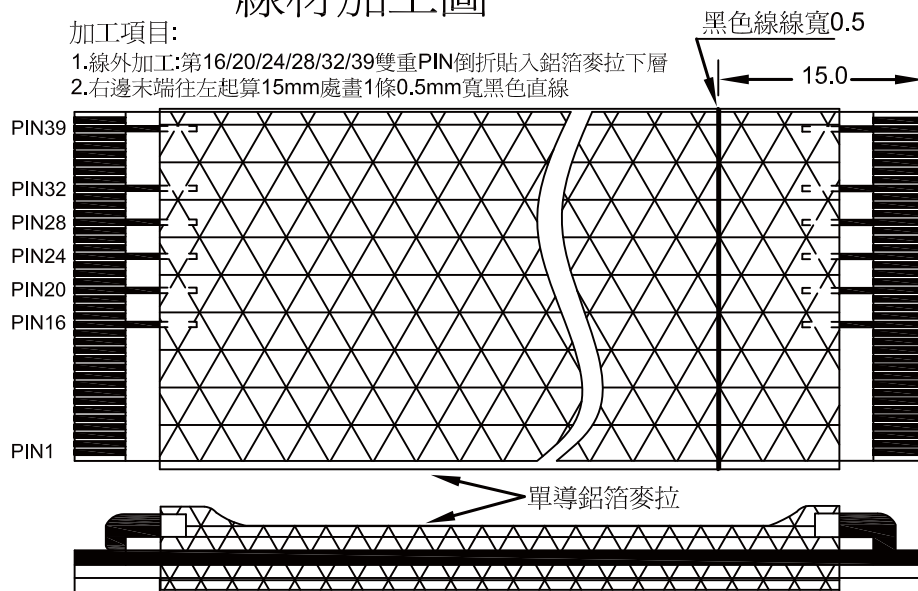

No. of Conductor		40									
SYMBOL	P	W	SP	M	A	TL	T	S1	S2	S3	S4
RANGE	0.5	20.5	19.5	0.5	0	80	0.3	4	4	6	6
TOLERANCE	±0.05	±0.1	±0.1	±0.1	±0.5	±2	±0.05	±1	±1	±2	±2
CONDUCTOR		Tin Plated Copper			Thickness(Ct)			0.05		±0.01	
SPECIFICATION		Wire (Tin 1~3um)			Width(Cw)			0.32		±0.03	

Note:

UL Style: 20706 105°C 60V

ROSH: YES

Operating Temperature: -30°C~85°C

Dielectric Strength: AC500V / 10ma / 1 min

Rated Current: 1A

儲存環境: 16°C~27°C / 濕度 65RH%

Material:

Insulation Film:

Supporting Tape:

Conductor:

EMI對策:

Polyester White

Polyester Blue

Tin Plated Flat Copper Wire

鋁箔麥拉+導電膠

單導鋁箔麥拉結構表示圖



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPV-CS40-080-LF
SERIES T LEADFREE
80mm
40 WAY
SAME SIDE SHLD
CABLE

DESCRIPTION: 0.5PH 40PIN L=60mm C TYPE +鋁箔+6接地 +畫黑色線1條