



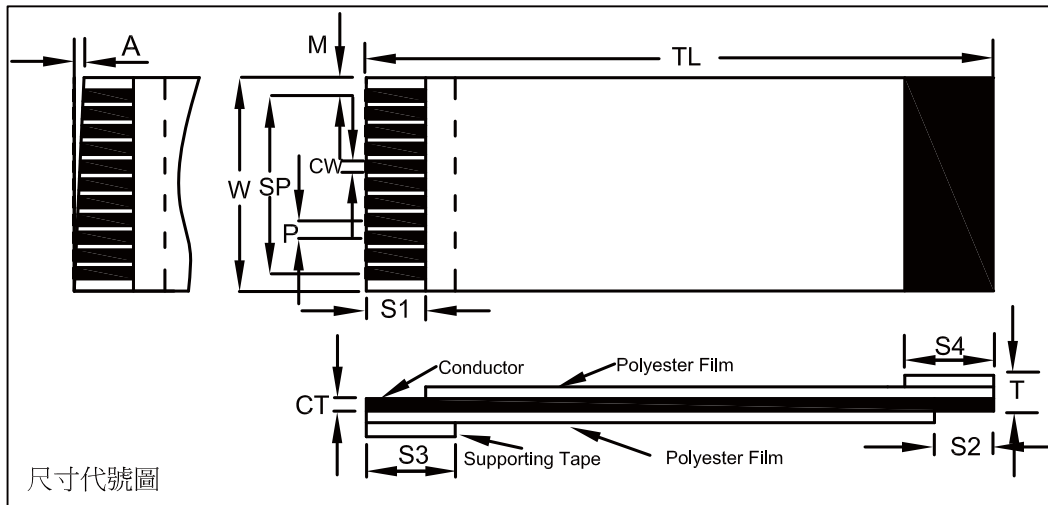

線材加工圖

加工項目:

1.線外加工:第1/24雙重PIN倒折貼入鋁箔麥拉下層

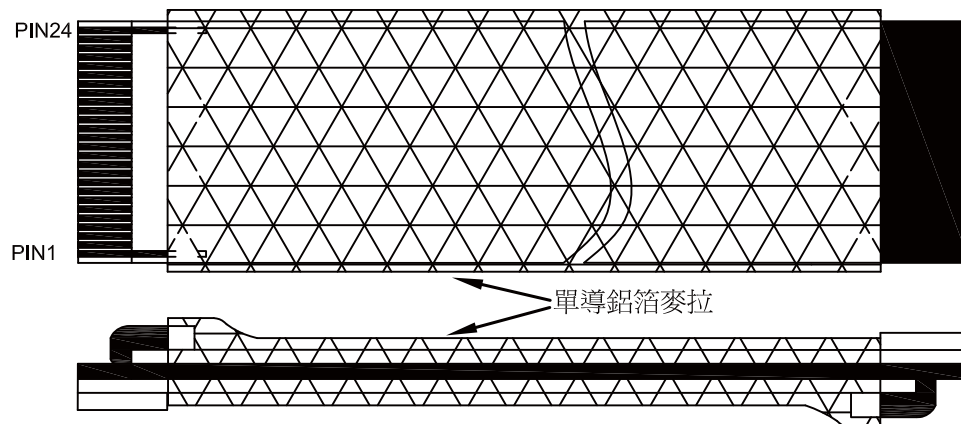

No. of Conductor	24										
SYMBOL	P	W	SP	M	A	TL	T	S1	S2	S3	S4
RANGE	0.5	12.5	11.5	0.5	0	45	0.3	4	4	6	6
TOLERANCE	±0.05	±0.1	±0.1	±0.1	±0.5	±2	±0.05	±1	±1	±2	±2
CONDUCTOR	Tin Plated Copper				Thickness(Ct)			0.035		±0.005	
SPECIFICATION	Wire (Tin 1~3um)				Width(Cw)			0.3		±0.03	

Note:

UL Style: 20798 80°C 60V

ROSH: YES

Operating Temperature: -30°C~85°C

Dielectric Strength: AC500V / 10ma / 1 min

Rated Current: 0.5 A

儲存環境: 16°C~27°C / 濕度 65RH%

Material:

Insulation Film:

Polyester White

Supporting Tape:

Polyester Blue

Conductor:

Tin Plated Flat Copper Wire

EMI對策:

鋁箔麥拉+導電膠

單導鋁箔麥拉結構表示圖



照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

FPV-CT24-045-LF
SERIES | | LEADFREE
45mm
24 WAY
BOTH SIDE SHLD
CABLE

DESCRIPTION: 0.5PH 24PIN L=45mm D TYPE +鋁箔+2接地