


單導鋁箔麥拉結構表示圖

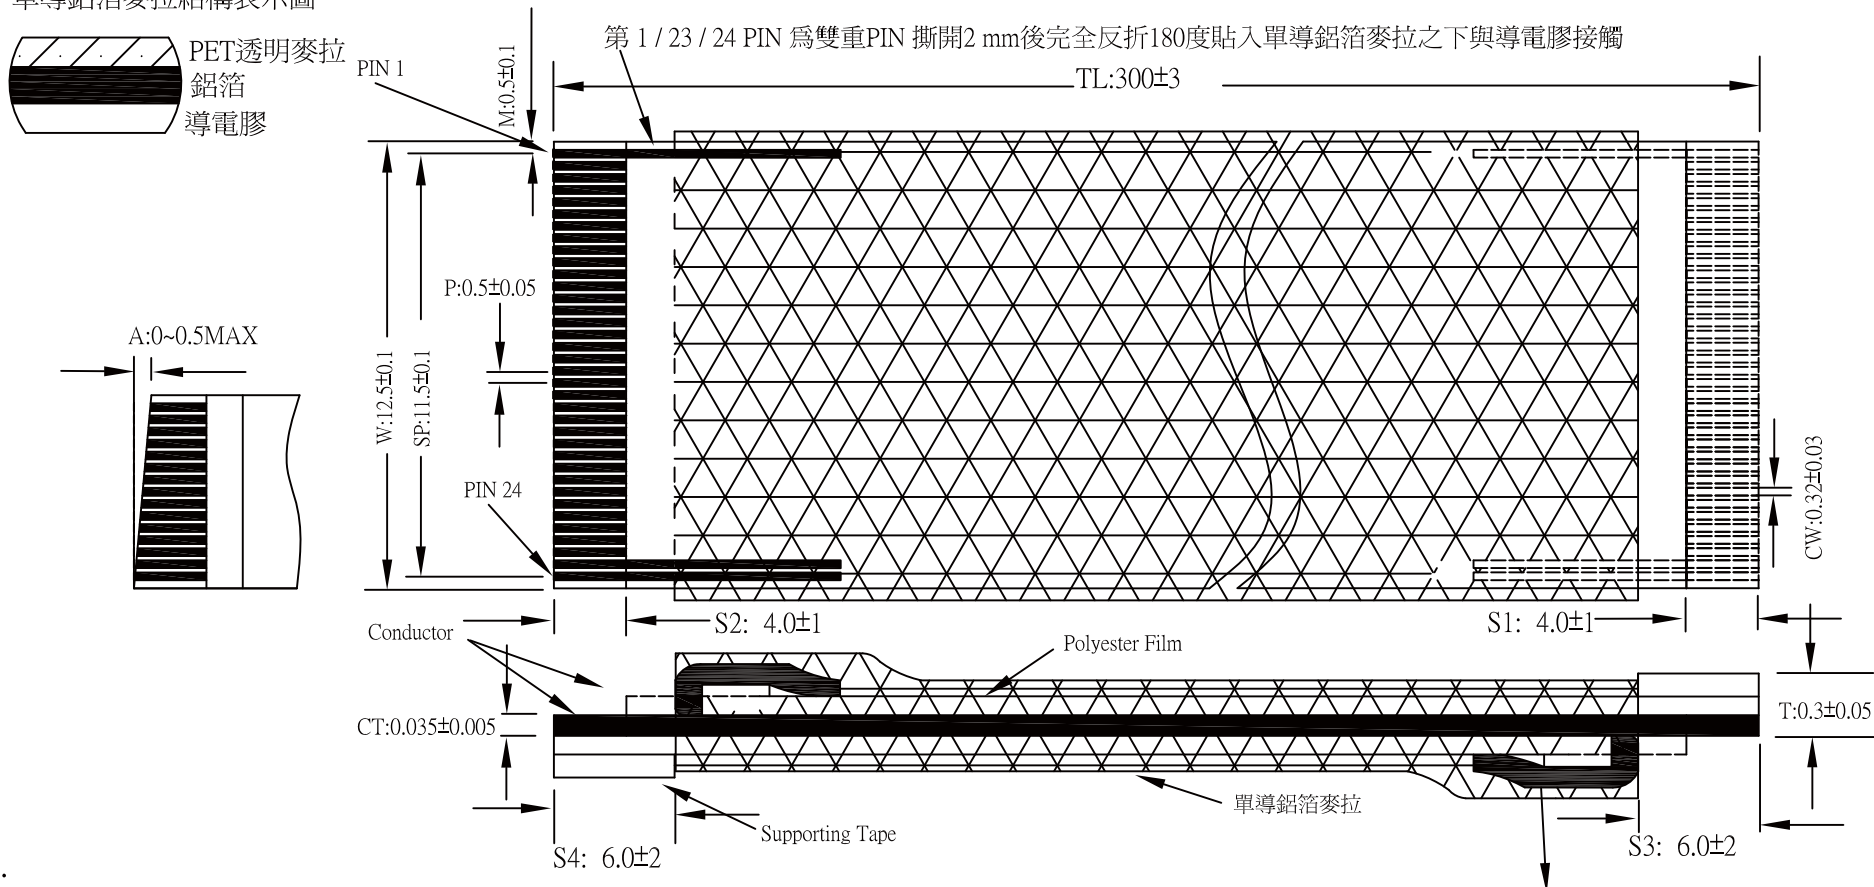

Note:

ROSH: YES

Operating Temperature: -30C~85C

Dielectric Strength: AC500V / 10ma / 1 min

Rated Current: 1A

儲存環境: 16C~27C / 濕度 65RH%

Material:

Insulation Film:

Polyester White

Supporting Tape:

Polyester Blue

Conductor:

Tin Plated Flat Copper Wire

EMI對策:

鋁箔麥拉+導電膠

第 1 / 23 / 24 PIN 為雙重PIN 撕開2 mm後完全反折180度貼入單導鋁箔麥拉之下與導電膠接觸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG ±

照片框

ORDER INFORMATION

FPV-CT24-300-LF

SERIES

LEADFREE

300mm

24 WAY

BOTH SIDE SHLD

CABLE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.5PH 24PIN L=300mm D TYPE +鋁箔+3接地